



SPLIT-TYPE AIR CONDITIONERS

Changes for the Better

Mitsubishi
Electric
Quality

Wrap Yourself in Comfort and Quiet
Eco-conscious Technologies from Japan

Full Product Line Catalogue 2020

for a greener tomorrow



Doing Our Part to Create a Better Future for All...

Core Environmental Policy

The Mitsubishi Electric Group promotes sustainable development and is committed to protecting and restoring the global environment through technology, through all its business activities, and through the actions of its employees.

Environmental Vision 2021

Making Positive Contributions to the Earth and its People through Technology and Action

Preventing Global Warming

- Reduce CO₂ emissions from product usage by 30%
- Reduce total CO₂ emissions from production by 30%
- Aim to reduce CO₂ emissions from power generation

Creating a Recycling-Based Society


- Reduce, reuse and recycle "3Rs" products reduce resources used by 30%
- Zero emissions from manufacturing reducing the direct landfill of waste to zero

Ensuring Harmony with Nature Fostering Environmental Awareness

The New Refrigerant R32

The new R32 refrigerant has a global warming potential approximately 1/3*1 that of our current refrigerant, R410A; thereby dramatically reducing the negative impact more than ever. Actively introducing the new R32 refrigerant to suppress global warming, Mitsubishi Electric continues to promote manufacturing while considering the environment.


Comparison of Global Warming Potential

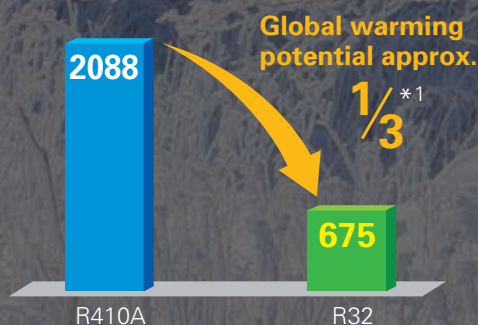

*1: Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088 (R410A) and 675 (R32).

Mitsubishi Electric reflects the essence of this policy and vision in all aspects of its air conditioner business as well.

Preventing Global Warming
Heat pump technology inspires Mitsubishi Electric to design air conditioners that harmonize comfort and ecology.

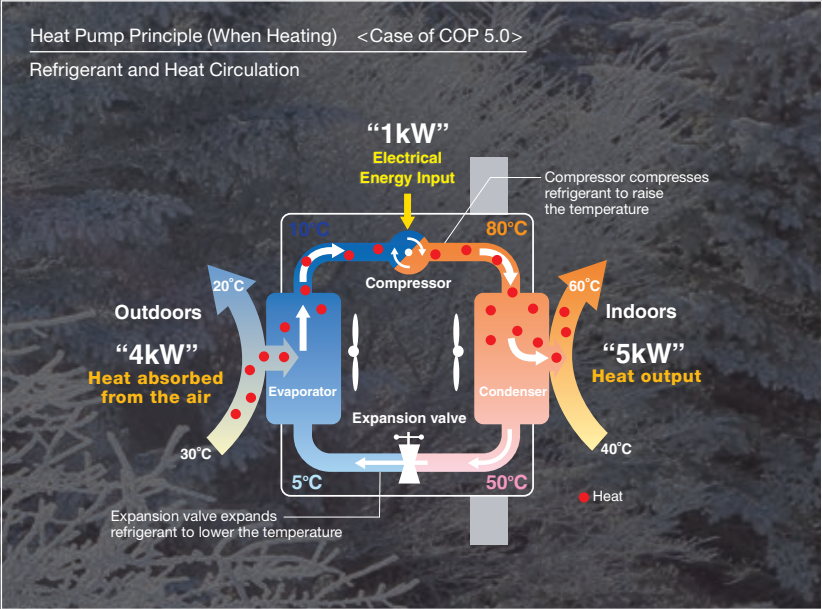

Mitsubishi Electric develops technologies to balance comfort and ecology, achieving greater efficiency in heat pump operation.

	Comfort	Ecology
1. Inverter	Faster start-up and more stable indoor temperature than non-inverter units.	Fewer On/Off operations than with non-inverter, saving energy.
2. 3D i-see Sensor	Since the positions of people can be detected, airflow can be set to personal taste, such as in airflow path or protected from the wind. The ability to adjust to individual preferences realizes more comfortable air conditioning.	Since the number of people in a room can be detected, energy-saving operation is adjusted or the power is turned off automatically. Efficient air conditioning with less waste is realized.
3. Flash Injection	Achieves high heating capacity even at low temperatures, plus faster start-up compared to conventional inverters.	Expands the region covered by heat pump heating system.

Creating a Recycling-Based Society

1. All models are designed for RoHS and WEEE compliance.*
2. Mitsubishi Electric develops downsizing technology to reduce materials use.

* WEEE and RoHS directives: The Waste Electrical and Electronic Equipment (WEEE) Directive is a recycling directive for this type of equipment, while the Restrictions of Hazardous Substances (RoHS) Directive is an EU directive restricting the use of six specified substances in electronic and electrical devices. In the EU, it is no longer possible (from July 2006) to sell products containing any of the six substances.

Ensuring Harmony with Nature / Fostering Environmental Awareness







In striving to heighten the eco-awareness of its employees, Mitsubishi Electric provides education in RoHS, WEEE and other environmental regulations, along with environmental education targeting second and third-year workers.

C

CONTENTS















Air Conditioners

New releases in 2020	005-006
 LINE-UP	007-010
 M SERIES	011-048
 S SERIES	049-058
 P SERIES	059-094
 MULTI SPLIT SERIES	095-120
 POWERFUL HEATING SERIES	113-132





AIR-TO-WATER

 FEATURES & SPECIFICATIONS	133-166
--	----------------

Air Conditioners

 NEW ECODSIGN DIRECTIVE	167-168
 INVERTER TECHNOLOGIES	169-170
 COMFORT	171-174
 CONVENIENCE	175-176
 INSTALLATION & MAINTENANCE	177-178
 SYSTEM CONTROL	179-180
 CONTROL TECHNOLOGIES	181-188
 SYSTEM CONTROL	189-190
 FUNCTION LIST	191-198
 OPTIONAL PARTS	199-208
 EXTERNAL DIMENSIONS	209-226
 PIPING INSTALLATION	227-234

M/S/P/Multi/Zubadan/ATW

 CONDITIONS FOR SPECIFICATION	235
 HOW TO READ A MODEL NAME	235
 REFRIGERANT AMOUNT	236
 R32 REFRIGERANT	237-238

LOSSNAY SYSTEM

 FEATURES & SPECIFICATIONS	239-266
--	----------------

New releases in 2020

M SERIES


P SERIES

MXZ SERIES


ATW SERIES



M SERIES

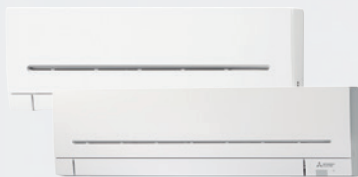


MSZ-AP15VG (Muti connection only)
MSZ-AP20VG (Single)
MSZ-AP60/71VG
P.24



MSZ-FT25/35/50VGK
P.35



MSZ-HR60/71VF
P.35



MSZ-BT20/25/35/50VG
P.33



MFZ-KT25/35/50/60VG
P.45



PCA-M71HA
P.93

MXZ SERIES



2-port
MXZ-2F33VF3
MXZ-2F42VF3
MXZ-2F53VF(H)3
P.101
MXZ-2F53VFBZ



3-port 4-port
MXZ-3F54VF3
MXZ-3F68VF3
MXZ-4F72VF3
MXZ-4F80VF3
MXZ-4F83VF

5-port
MXZ-5F102VF

6-port
MXZ-6F122VF

P.101
MXZ-4F83VFBZ

ATW SERIES



PUZ-WM50
P.136



SUZ-SWM40/60/80
P.138



PUZ-WM60/85/112
PUD-SWM60/80/100/120
PUD-SHWM60/80/100/120/140
P.139

P SERIES



PUZ-ZM200/250YKA
PUZ-M200/250YKA
P.65, 66



D generation Indoor Unit
P.141



ecodan geodan
P.149

LINE-UP

M SERIES

INVERTER Models

Model Name		1.5kW	1.8kW	2.0kW	2.2kW	2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW	Page
		1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	
Wall-mounted	MSZ-L Series  R32 R410A *1		WVRB Multi connection only			WVRB SINGLE	WVRB SINGLE		WVRB SINGLE	WVRB SINGLE		13
	MSZ-A Series MSZ-AP15-20VG  R32 R410A *1	Multi connection only		SINGLE								19
	MSZ-A Series MSZ-AP25-50VG  MSZ-AP60/71VG					SINGLE _H	SINGLE _H	SINGLE _H	SINGLE _H	SINGLE _H	SINGLE _H	19
	MSZ-E Series  R32 R410A *1		WSB Multi connection only		WSB Multi connection only	WSB SINGLE _H	WSB SINGLE _H	WSB SINGLE _H	WSB SINGLE _H			25
	MSZ-S Series MSZ-SF15/20VA  R410A	Multi connection only		Multi connection only								27
	MSZ-S Series MSZ-SF25/35/42/50VE3 					SINGLE _H	SINGLE _H	SINGLE _H	SINGLE _H			27
	MSZ-G Series R410A 									SINGLE	SINGLE	27
	MSZ-BT Series R32 			SINGLE		SINGLE	SINGLE		SINGLE			31
	MSZ-HR Series MSZ-HR25/35/42/50VF  MSZ-HR60/71VF					SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	SINGLE	33
	MSZ-D Series R410A 					SINGLE	SINGLE					37
	MSZ-H Series MSZ-HJ25/35/50  MSZ-HJ60/71					SINGLE	SINGLE		SINGLE	SINGLE	SINGLE	39
	MSY-TP Series R32 						SINGLE		SINGLE			35
Compact floor	MFZ Series R32 					SINGLE	SINGLE		SINGLE	SINGLE		41
1-way cassette	MLZ Series R32 					SINGLE	SINGLE		SINGLE			43



*1: R410A is for Multi connection.

H : Outdoor unit with freeze-prevention heater is available.
W-S-B: Indoor units are available in three colours; White, Black and Silver.
W-V-R-B: Indoor units are available in four colours; Natural White, Pearl White, Ruby Red, and Onyx Black.

Indoor Combinations	
SINGLE	1 outdoor unit & 1 indoor unit
TWIN	1 outdoor unit & 2 indoor units
TRIPLE	1 outdoor unit & 3 indoor units
QUADRUPLE	1 outdoor unit & 4 indoor units

S SERIES

INVERTER Models






Model Name			1.5kW	2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	10.0kW	12.5kW	14.0kW	Page
			1-phase	1-phase	1-phase	1-phase	1-phase	1-phase	1- & 3-phase	1- & 3-phase	1- & 3-phase	
2 x 2 cassette	SLZ Series		Multi connection only	SINGLE	SINGLE	SINGLE	SINGLE	TWIN ^{*1}	TWIN ^{*1}	TWIN ^{*1}	TWIN ^{*1}	51
	R32 R410A								TRIPLE ^{*1}	TRIPLE ^{*1}	TRIPLE ^{*1}	
Compact ceiling-concealed	SEZ Series			SINGLE ^{*2}	SINGLE ^{*2}	SINGLE ^{*2}	SINGLE ^{*2}	SINGLE ^{*2}				56
	R32 R410A											

*1 Only for R410A connection

*2 Indoor units are available in two types; with or without the wireless remote controller.

P SERIES

R32 Power Inverter Models / R32 Standard Inverter Models

Model Name			3.5kW	5.0kW	6.0kW	7.1kW	10.0kW	12.5kW	14.0kW	20.0kW	25.0kW	Page
			1-phase	1-phase	1-phase	1-phase	1- & 3-phase	1- & 3-phase	1- & 3-phase	1- & 3-phase	1- & 3-phase	
4-way cassette	PLA Series		SINGLE	SINGLE	SINGLE	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	63
	R32											
Ceiling-concealed	PEAD Series		SINGLE	SINGLE	SINGLE	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	72
	R32											
Wall-mounted	PKA Series		SINGLE [*]	SINGLE [*]	SINGLE [*]	SINGLE [*] TWIN [*]	SINGLE TWIN	TWIN	TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TRIPLE QUADRUPLE	79
	R32											
Ceiling-suspended	PCA-KA Series		SINGLE	SINGLE	SINGLE	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	84
	R32											
for Professional Kitchen	PCA-HA Series [*]					SINGLE [*]			TWIN [*]		TRIPLE [*]	89
	R32											

* R32 Power Inverter Model only

R410A POWER INVERTER Models / R410A STANDARD INVERTER Models

Model Name			3.5kW	5.0kW	6.0kW	7.1kW	10.0kW	12.5kW	14.0kW	20.0kW	25.0kW	Page
			1-phase	1-phase	1-phase	1-phase	1- & 3-phase	1- & 3-phase	1- & 3-phase	3-phase	3-phase	
4-way cassette	PLA Series		SINGLE	SINGLE	SINGLE	SINGLE TWIN [*]	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	63
	R410A											
Ceiling-concealed	PEAD Series		SINGLE	SINGLE	SINGLE	SINGLE TWIN [*]	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	72
	R410A											
	PEA Series											77
Wall-mounted	PKA Series		SINGLE [*]	SINGLE [*]	SINGLE [*]	SINGLE [*] TWIN [*]	SINGLE TWIN	TWIN	TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TRIPLE QUADRUPLE	79
	R410A											
Ceiling-suspended	PCA-KA Series		SINGLE	SINGLE	SINGLE	SINGLE TWIN [*]	SINGLE TWIN	SINGLE TWIN	SINGLE TWIN TRIPLE	TWIN TRIPLE QUADRUPLE	TWIN TRIPLE QUADRUPLE	84
	R410A											
for Professional Kitchen	PCA-HA Series [*]					SINGLE [*]			TWIN [*]		TRIPLE [*]	89
	R410A											
Floor-standing	PSA Series					SINGLE [*]	SINGLE	SINGLE	SINGLE TWIN	TWIN	TWIN TRIPLE	92
	R410A											

* Power Inverter Models only

LINE-UP

MXZ SERIES INVERTER Models

Model Name	Capacity Class	Page
up to 2 indoor units MXZ-2F33VF3 R32	3.3kW <1-phase>	97
up to 2 indoor units MXZ-2F42VF3 R32	4.2kW <1-phase>	97
up to 2 indoor units MXZ-2F53VF(H)3 R32	5.3kW <1-phase>	97
up to 3 indoor units MXZ-3F54VF3 R32	5.4kW <1-phase>	97
up to 3 indoor units MXZ-3F68VF3 R32	6.8kW <1-phase>	97
up to 4 indoor units MXZ-4F72VF3 R32	7.2kW <1-phase>	97
up to 4 indoor units MXZ-4F80VF3 MXZ-4F83VF R32	8.0kW <1-phase>	97
up to 5 indoor units MXZ-5F102VF R32	10.2kW <1-phase>	97
up to 6 indoor units MXZ-6F122VF R32	12.2kW <1-phase>	97
up to 2 indoor units MXZ-2HA40VF R32	4.0kW <1-phase>	103
up to 2 indoor units MXZ-2HA50VF R32	5.0kW <1-phase>	103
up to 3 indoor units MXZ-3HA50VF R32	5.0kW <1-phase>	103

Model Name	Capacity Class	Page
up to 2 indoor units MXZ-2D33VA R410A	3.3kW <1-phase>	101
up to 2 indoor units MXZ-2D42VA2 R410A	4.2kW <1-phase>	101
up to 2 indoor units MXZ-2D53VA (H)2 R410A	5.3kW <1-phase>	101
up to 3 indoor units MXZ-3E54VA R410A	5.4kW <1-phase>	101
up to 3 indoor units MXZ-3E68VA R410A	6.8kW <1-phase>	101
up to 4 indoor units MXZ-4E72VA R410A	7.2kW <1-phase>	101
up to 4 indoor units MXZ-4E83VA R410A	8.3kW <1-phase>	101
up to 5 indoor units MXZ-5E102VA R410A	10.2kW <1-phase>	101
up to 6 indoor units MXZ-6D122VA R410A	12.2kW <1-phase>	101

PUMY SERIES INVERTER Models

Model Name	12.5kW 1 & 3-phase	14.0kW 1 & 3-phase	15.5kW 1 & 3-phase	22.4kW 3-phase	Page
PUMY-SP R410A	✓	✓	✓		105
PUMY-P R410A	✓	✓	✓	✓	107

POWERFUL HEATING SERIES INVERTER Models

Model Name	2.5kW 1-phase	3.5kW 1-phase	5.0kW 1-phase	5.3kW 1-phase	8.3kW 1-phase	10.0kW 1- & 3-phase	12.5kW 3-phase	Page
Wall-mounted								
MSZ-L VGHZ Series R32 R410A *	SINGLE H	SINGLE H	SINGLE H					115
MSZ-F Series R32	SINGLE H	SINGLE H	SINGLE H					118
Compact floor								
MFZ VEHZ Series R410A	SINGLE H	SINGLE H	SINGLE H					119
ZUBADAN								
4-way cassette						SINGLE TWIN	SINGLE TWIN	122
Ceiling-concealed						SINGLE TWIN	SINGLE TWIN	124
Wall-mounted						SINGLE TWIN		125
Multi split								
MXZ-F VFHZ Series R32				2PORT H	4PORT H			126
MXZ-E VAHZ Series R410A				2PORT H	4PORT H			126

* R410A is for Multi connection.

H: Freeze-prevention heater is included as standard equipment.

Indoor Combinations	
SINGLE	1 outdoor unit & 1 indoor unit
TWIN	1 outdoor unit & 2 indoor units
TRIPLE	1 outdoor unit & 3 indoor units
QUADRUPLE	1 outdoor unit & 4 indoor units

AIR TO WATER SERIES










R32

INDOOR UNIT

Hydro box, cylinder unit



OUTDOOR UNIT

Packaged type	Small capacity (Under 5kW)*	Medium capacity (6.0kW–11.2kW)*
	 PUZ-WM50	 PUZ-WM60/85/112
Split type	Small capacity (Under 5kW)*	Medium capacity (6.0kW–11.2kW)*
		 PUD-S 10/140
		 PUD-SWM60/80/100/120
Eco Inverter	 SUZ-SWM40/60	 SUZ-SWM80

*Rated capacity is at conditions A2W35. (according to EN14511)




R410A

INDOOR UNIT

Hydro box, cylinder unit



OUTDOOR UNIT

Split type	Medium capacity (7.5kW–14kW)*	Large capacity (≥16kW)*
	 PUHZ-SHW80/112	 PUHZ-SHW230
	 PUHZ-SW75/100	 PUHZ-SW160/200

*Rated capacity is at conditions A2W35. (according to EN14511)

Other ATW-related system

Mr.SLIM+

R410A



PUHZ-FRP71

PUMY + ecodan

R410A



PUMY-P112/125/140

ecodan geodan

R32



EHGT17D-YM9ED













M

SERIES



SELECTION

Choose the model that best matches room conditions.

SELECT SERIES		
A multiple series line-up to choose from, each with various outstanding features. In addition to inverter-equipped models, constant-speed, floor-standing and cassette models can be selected. Choose the best series to match usage needs.		
Wall-mounted Units		
MSZ-L SERIES R32 R410A *1  25/35/60 25/35 25/35 SEER A+++ SCOP A+++ MXZ connection	MSZ-A SERIES R32 R410A *1 MSZ-AP60/71VG  MSZ-AP25-50VG 29/25/35 25-60 SEER A+++ SCOP A+++ MXZ connection	MSZ-G SERIES R410A  SEER A++ SCOP A+ MXZ connection
MSZ-E SERIES R32 R410A *1  25/35 25/35 SEER A+++ SCOP A+++ MXZ connection	MSZ-S SERIES R410A MSZ-SF25-50VE  MSZ-SF15/20VA SEER A++ SCOP A+ MXZ connection	MSY-TP SERIES R32  35 SEER A+++
MSZ-BT SERIES R32 R410A *1  SEER A++ SCOP A+ MXZ connection	MSZ-HR SERIES R32 MSZ-HR60/71VF  MSZ-HR25-50VF SEER A++ SCOP A+ MXZ connection	MSZ-D SERIES R410A  SEER A++ SCOP A+ MXZ connection
MSZ-H SERIES R410A MSZ-HJ60/71  MSZ-HJ25/35/50 50/60/71 50/60/71 SEER A++ SCOP A++ MXZ connection	Floor-standing MFZ SERIES R32  SEER A++ SCOP A+ MXZ connection	Cassette Units MLZ SERIES R32  MXZ connection



SEER A SCOP A Energy Rank

MXZ connection Compatible for connection to MXZ Series system

R32 R32 Refrigerant

R410A R410A Refrigerant

*1 R410 is for multi connection.

SELECT OUTDOOR UNIT		
Some outdoor units in the line-up have heaters for use in cold regions. Units with an "H" in the model name are equipped with heaters.		
Heater Installed MUZ-AP25/35/42/50VGH MUZ-EF25/35VGH MUZ-SF25/35/42/50VEH	Hyper Heating MUZ-LN25/35/50VGHZ MUZ-FH25/35/50VEHZ MUZ-KJ25/35/50VEHZ	Selecting a Heater-equipped Model In regions with the following conditions, there is a possibility that water resulting from condensation on the outdoor unit when operating in the heating mode will freeze and not drain from the base. 1) Cold outdoor temperatures (temperature does not rise above 0°C all day) 2) Areas where dew forms easily (in the mountains, valleys(surrounded by mountains), near a forest, near unfrozen lakes, ponds, rivers or hot springs), or areas with snowfall. To prevent water from freezing in the base, it is recommended that a unit with a built-in heater be purchased. Please ask your dealer representative about the best model for you.
 MUZ-LN25/35VG	 MUZ-LN50VG	

MSZ-L SERIES

R32
Single / Multi
R410A
Multi

MSZ-LN18/25/35/50/60VG2




GOOD DESIGN AWARD 2016
BEST 100



Developed to complement modern interior room décor, the LN Series is available in four colours specially chosen to blend in naturally wherever installed. Not only the sophisticated design, but also the optimum energy efficiency and operational comfort add even more value to this series.

Luminous and Luxurious Design


Natural White, Pearl White, Ruby Red, and Onyx Black. LN Series indoor units are available in four colours to match various lifestyles. The appearance of the indoor unit differs depending on the lighting in the room, attracting the attention of everyone that enters the room.

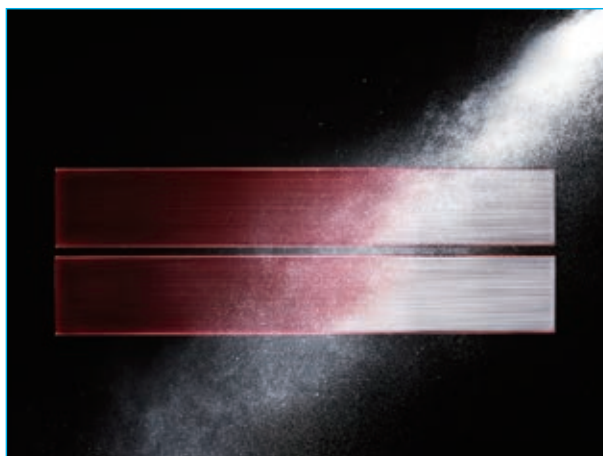


Master craftsmanship painting technology has resulted in a refined design, giving the finish deep colour and a premium quality feel.



Pearl White blends in with any interior.

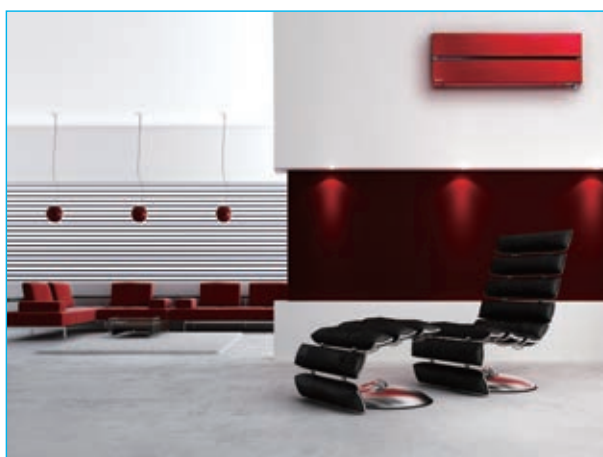

Ruby Red gives an accent to the room, affording timeless elegance to sophisticated interiors.

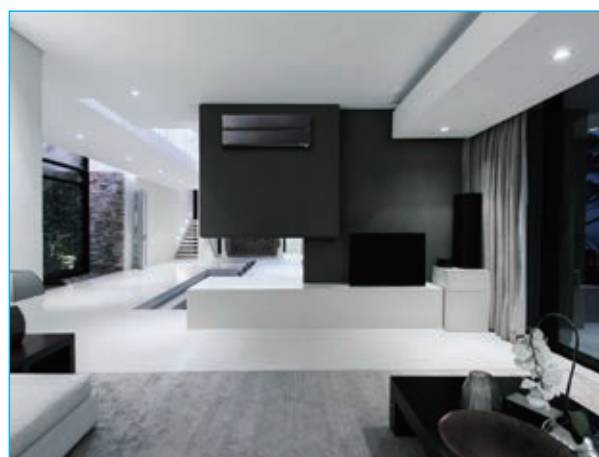

Onyx Black matches darker interiors, creating a comfortable environment.

LED Backlight Remote Controller

Not only the indoor units, but the wireless remote controllers come in four colours as well. Each remote controller matches the indoor unit. Even the textures are the same.

The setting can be easily checked in the dark.



Pearl White



Ruby Red



Onyx Black




Natural White

High Energy Efficiency




Optimum cooling/heating performance is another feature for the LN series. Models from capacities 25 to 50 have achieved the "Rank A+++" for SEER, and models for capacities 25 and 35 have achieved the "Rank A+++" for SCOP as well.

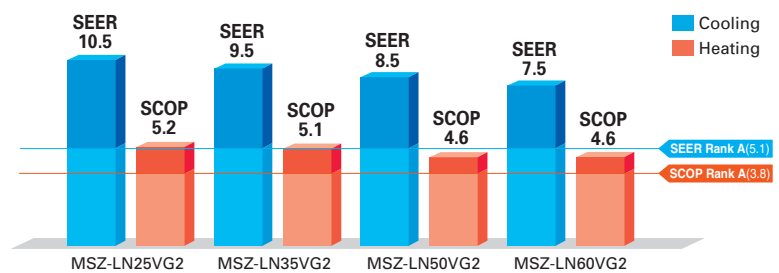


3D i-see Sensor

The LN Series is equipped with 3D i-see Sensor, an infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as "Indirect airflow," to avoid airflow hitting people directly, and "direct airflow" to deliver airflow to where people are.

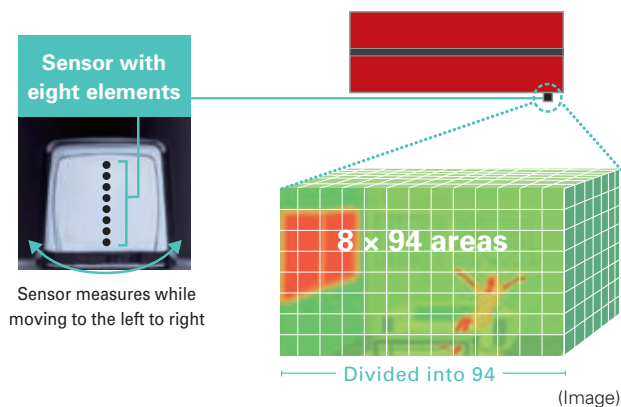

No occupancy energy-saving mode


The sensors detect whether there are people in the room. When no-one is in the room, the unit automatically switches to energy-saving mode.

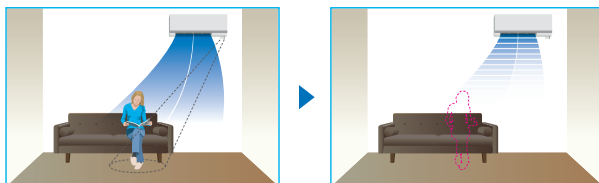

The "3D i-see Sensor" detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.


Indirect Airflow

The indirect airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.




Direct Airflow

This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.




Even Airflow *LN Series only

Normal swing mode



The airflow is distributed equally throughout the room, even to spaces where there is no human movement.



Even airflow mode



The 3D i-see sensor memorizes human movement and furniture positions, and efficiently distributes airflow.

No occupancy Auto-OFF mode *LN Series only


The sensors detect whether or not there are people in the room. When there is no one in the room, the unit turns off automatically.




Circulator Operation

In case the indoor temperature reaches the setting temperature, the outdoor unit stops and the indoor unit starts FAN operation to circulate the indoor air.

The outdoor unit starts operation automatically when the indoor temperature drops below the setting temperature.



If the heating operation is continued, the warm air is formed around ceiling.




This operating can help to circulate and rene warm air.

Plasma Quad Plus

Plasma Quad Plus is a plasma-based filter system that effectively removes six kinds of air pollutants. Plasma Quad Plus captures mold and allergens more effectively than Plasma Quad. It can also capture PM2.5 and particles smaller than 2.5µm, creating healthy living spaces for all.


Bacteria



Test results have confirmed that Plasma Quad Plus neutralizes 99% of bacteria in 162 minutes in a 25m³ test space.

<Test No.> KRCS-Bio. Test Report
No. 2016-0118

Viruses



Test results have confirmed that Plasma Quad Plus neutralizes 99% of virus particles in 72 minutes in a 25m³ test space.

<Test No.> vrc.center, SMC
No. 28-002


Molds



Test results have confirmed that Plasma Quad Plus neutralizes 99% of mold in 135 minutes in a 25m³ test space.

<Test No.> Japan Food Research Laboratories
Test Report No. 16069353001-0201


Allergens



In a test, air containing cat fur and pollen was passed through the air cleaning device at the low airflow setting. Before and after measurements confirm that Plasma Quad Plus neutralizes 98% of cat fur and pollen.

<Test No.> ITEA Report No. T1606028

PM2.5



Test results have confirmed that Plasma Quad Plus removes 99% of PM2.5 in 145 minutes in a 28m³ test space.

<In-company investigation>

Dust



Test results have confirmed that Plasma Quad Plus removes 99.7% of dust and mites.

<Test No.> ITEA Report No. T1606028


Model	Name	Method	Bacteria	Viruses	Molds	Allergens	Dust	PM2.5*
FH Series	Plasma Quad	One-Stage Plasma	A	A	B	B	C	
LN Series	Plasma Quad Plus	Two-Stage Plasma	A	A	A	A	A	A

A: Highly effective
B: Effective
C: Partially effective


*PM2.5:
Particles smaller than 2.5µm



Image of Plasma Quad Plus

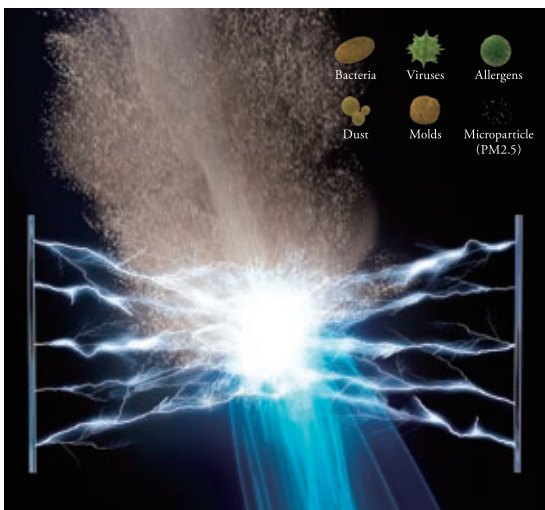

Principle of Plasma Quad Plus

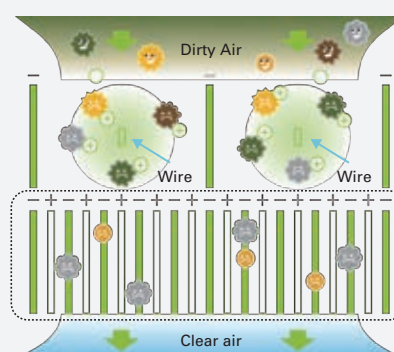

Dust, PM2.5

Viruses Bacteria
Mold Allergens

1st stage

- Make plasma.
- Break mold and allergens. Inhibit viruses.
- Dust and PM2.5 given an electrical charge (+).


2nd stage

- Make a strong electrical field.
- The charged dust and PM2.5 (+) are absorbed in the strong electrical field (-).




Dual Barrier Coating

A two-barrier coating prevents dust and greasy dirt from getting into the air conditioner.

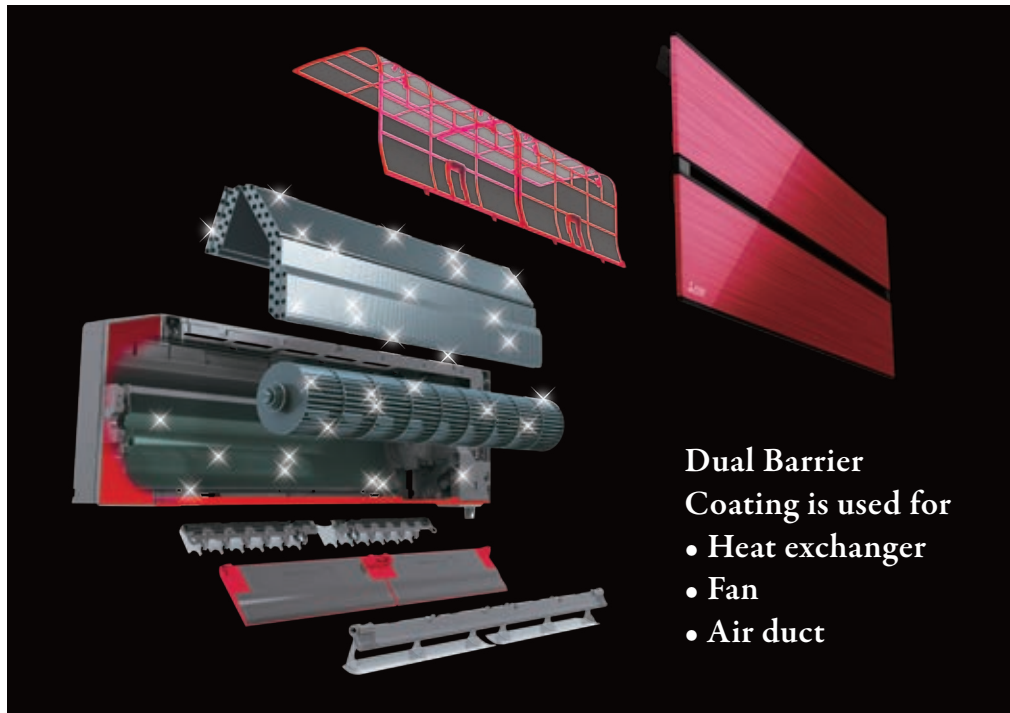


State-of-the-art coating technology


Dirt is generally classified into two groups: hydrophilic dirt such as fiber dust and sand dust, and hydrophobic dirt such as oil and cigarette smoke. Mitsubishi Electric's dual barrier coating works as a two-barrier coating with blended "fluorine particles" that prevent hydrophilic dirt penetration and "hydrophilic particles" that prevent hydrophobic dirt from getting into the air conditioner. This dual coating on the inner surface keeps the air conditioner clean year-round.

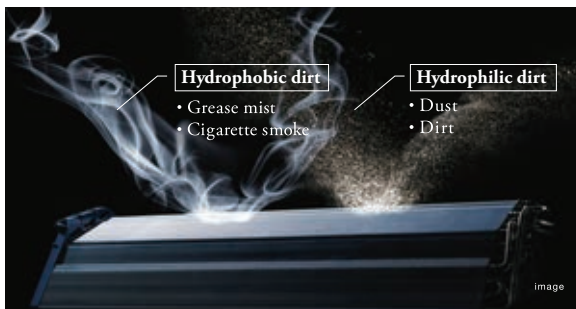

Comparison of dirt on heat exchanger, fan and air duct (in-house comparison)

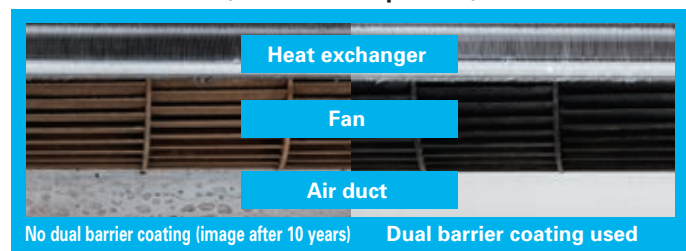

The inside of the indoor unit gets dirty after many years of usage.

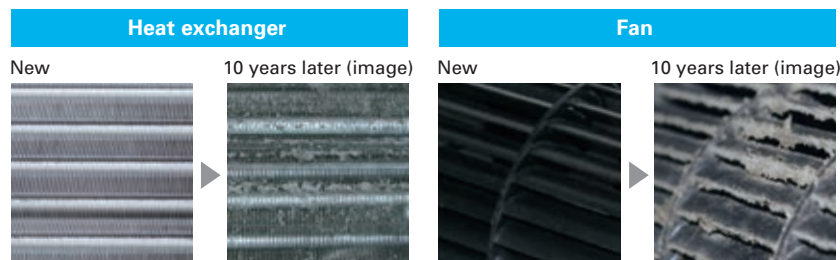

Consequences when the inside of the indoor unit is left dirty.

- Deterioration in energy efficiency.
- Musty smell from the unit.

Double Flap

The vanes create various airflows to make each person in the room comfortable. Not only the horizontal vanes, but also the vertical vanes move independently, eliminating hot spots or cold spots throughout the room.




Night Mode

When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.

- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated operating noise specification.


*The cooling/heating capacity may drop.

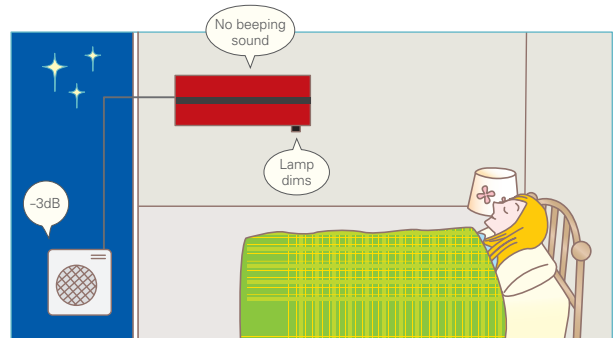

10°C Heating


During heating operation, the temperature can be set in 1°C increments down to 10°C.

This function can also be used with the Weekly Timer setting.

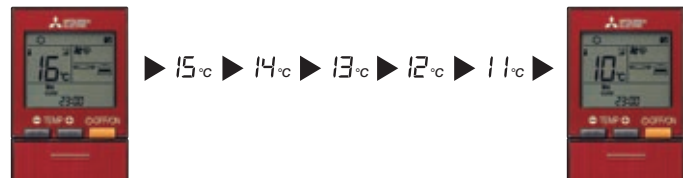

Quiet Operation


The indoor unit noise level is as low as 19dB for LN25/35 models, offering a peaceful inside environment.

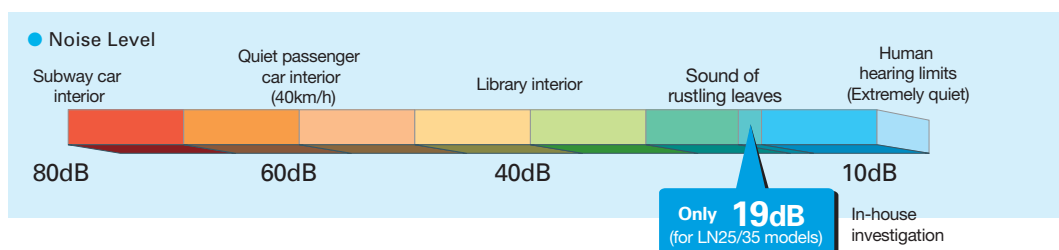

Built-in Wi-Fi Interface

The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

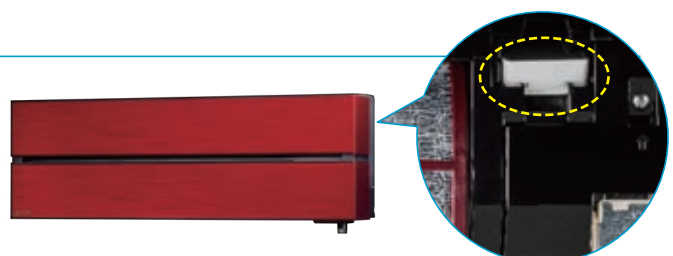

MSZ-L SERIES



Indoor Unit / Remote Controller

R32

R410A



GOOD DESIGN AWARD 2016
BEST 100

<Pearl White>



MSZ-LN18/25/35/50/60VG2V

<Ruby Red>



MSZ-LN18/25/35/50/60VG2R

<Natural White>



MSZ-LN18/25/35/50/60VG2W

<Onyx Black>



MSZ-LN18/25/35/50/60VG2B

Outdoor Unit

R32



MUZ-LN25/35VG2



MUZ-LN50VG2



MUZ-LN60VG



Type	Inverter Heat Pump				
Indoor Unit	MSZ-LN18VG2	MSZ-LN25VG2	MSZ-LN35VG2	MSZ-LN50VG2	MSZ-LN60VG2
Outdoor Unit	for MXZ connection	MUZ-LN25VG2	MUZ-LN35VG2	MUZ-LN50VG2	MUZ-LN60VG
Refrigerant	Single: R32 ⁽¹⁾ / Multi: R410A or R32 ⁽¹⁾				
Power Supply	Outdoor Power Supply				
	230 / Single / 50				
Cooling	Design load	kW	2.5	3.5	5.0
	Annual electricity consumption ⁽²⁾	kWh/a	83	129	205
	SEER ⁽⁴⁾		10.5	9.5	8.5
	Energy efficiency class		A+++	A+++	A+++
	Capacity				
Heating (Average Season) ⁽³⁾	Rated	kW	2.5	3.5	5.0
	Min-Max	kW	1.0 - 3.5	0.8 - 4.0	1.0 - 6.0
	Total Input	Rated	kW	0.485	0.820
	Design load	kW	3.0 (-10°C)	3.6 (-10°C)	4.5 (-10°C)
	Declared Capacity	at reference design temperature	kW	3.0 (-10°C)	3.6 (-10°C)
		at bivalent temperature	kW	3.0 (-10°C)	3.6 (-10°C)
		at operation limit temperature	kW	2.5 (-15°C)	3.2 (-15°C)
	Back up heating capacity	kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	807	987	1369
	SCOP ⁽⁴⁾		5.2	5.1	4.6
Operating Current (Max)	Energy efficiency class		A+++	A+++	A+++
	Rated	kW	3.2	4.0	6.0
	Min-Max	kW	0.7 - 5.4	0.9 - 6.3	1.0 - 8.2
	Total Input	Rated	kW	0.600	0.820
		kW	0.600	0.820	1.480
Indoor Unit	Operating Current (Max)	A	7.1	9.9	13.9
	Input	Rated	kW	0.027	0.034
	Operating Current(Max)	A	0.3	0.3	0.4
	Dimensions	H*W*D	mm	307-890-233	307-890-233
	Weight	kg	14.5 (W) 15.5 (V, R, B)	14.5 (W) 15.5 (V, R, B)	15 (W) 16 (V, R, B)
	Air Volume (SLo-Lo-Mid-Hi-SH ⁽⁵⁾ Dry/Wet)	Cooling	m ³ /min	4.7 - 5.9 - 7.1 - 9.2 - 12.4	4.7 - 5.9 - 7.1 - 9.2 - 13.0
		Heating	m ³ /min	4.5 - 6.6 - 7.5 - 11.0 - 13.9	4.5 - 6.6 - 7.5 - 11.0 - 13.9
	Sound Level (SPL)	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43
		Heating	dB(A)	19 - 24 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43
	Sound Level (PWL)	Cooling	dB(A)	58	59
Outdoor Unit		Heating	dB(A)	58	59
	Dimensions	H*W*D	mm	550-800-285	550-800-285
	Weight	kg	33	34	40
	Air Volume	Cooling	m ³ /min	34.3	34.3
		Heating	m ³ /min	32.7	32.7
	Sound Level (SPL)	Cooling	dB(A)	46	49
		Heating	dB(A)	49	50
	Sound Level (PWL)	Cooling	dB(A)	60	61
		Heating	dB(A)	61	64
	Operating Current (Max)	A	6.8	9.6	13.5
Ext. Piping	Breaker Size	A	10	10	16
	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52
	Max.Length	Out-In	m	20	30
	Max.Height	Out-In	m	12	15
	Guaranteed Operating Range (Outdoor)	Cooling	°C	-10 ~ +46	-10 ~ +46
		Heating	°C	-15 ~ +24	-15 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MSZ-A SERIES

Introducing a compact and stylish indoor unit with various capacity, designed to match number of rooms. High performance indoor and outdoor units enabled to achieve "Rank A+++" for SEER. *MSZ-AP20/25/35VG



MSZ-AP15/20VG



MSZ-AP25/35/42/50VG





MSZ-AP60/71VG



High energy saving

All models in the series, from the low-capacity 25 to the high-capacity 60, have achieved either the "Rank A+++" or "Rank A++" for SEER and SCOP as energy-savings rating. Our air conditioners are contributing to reduce energy consumption in a wide range.



Compact and stylish

15 class are for multi-systems and 25-71 class are introduced as single-split and multi-systems. From small rooms to living rooms, it is possible to coordinate residences with a unified design.


Living



Study



Bedroom

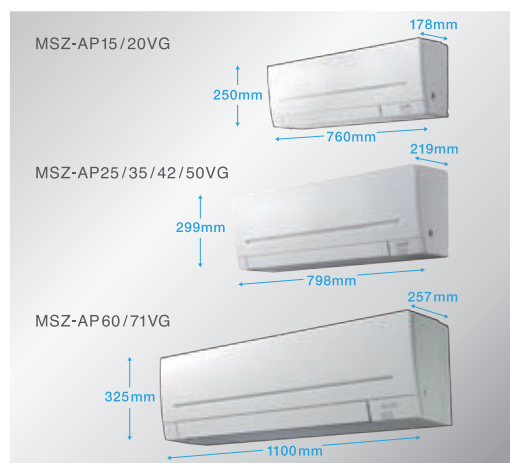


Evolved comfortable convenience function

Horizontal Airflow




The new airflow control which spreads across the ceiling eliminates the uncomfortable drafty feeling.

Auto Vane Control

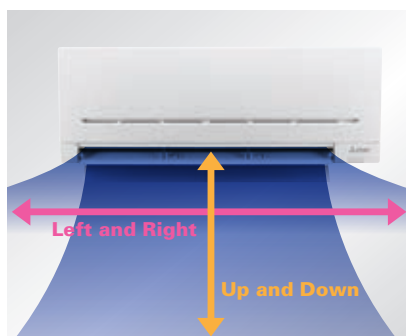


Auto vanes can be moved left and right, and up and down using the remote controller.*

The Function

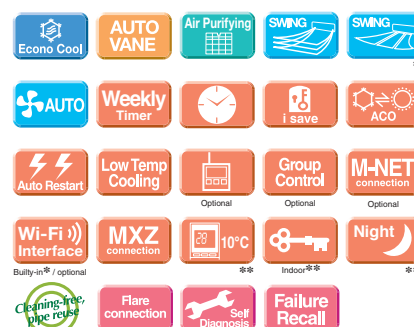

*Only for 25/35/42/50/60/71 models.
**Only for 20/25/35/42/50/60/71 models.

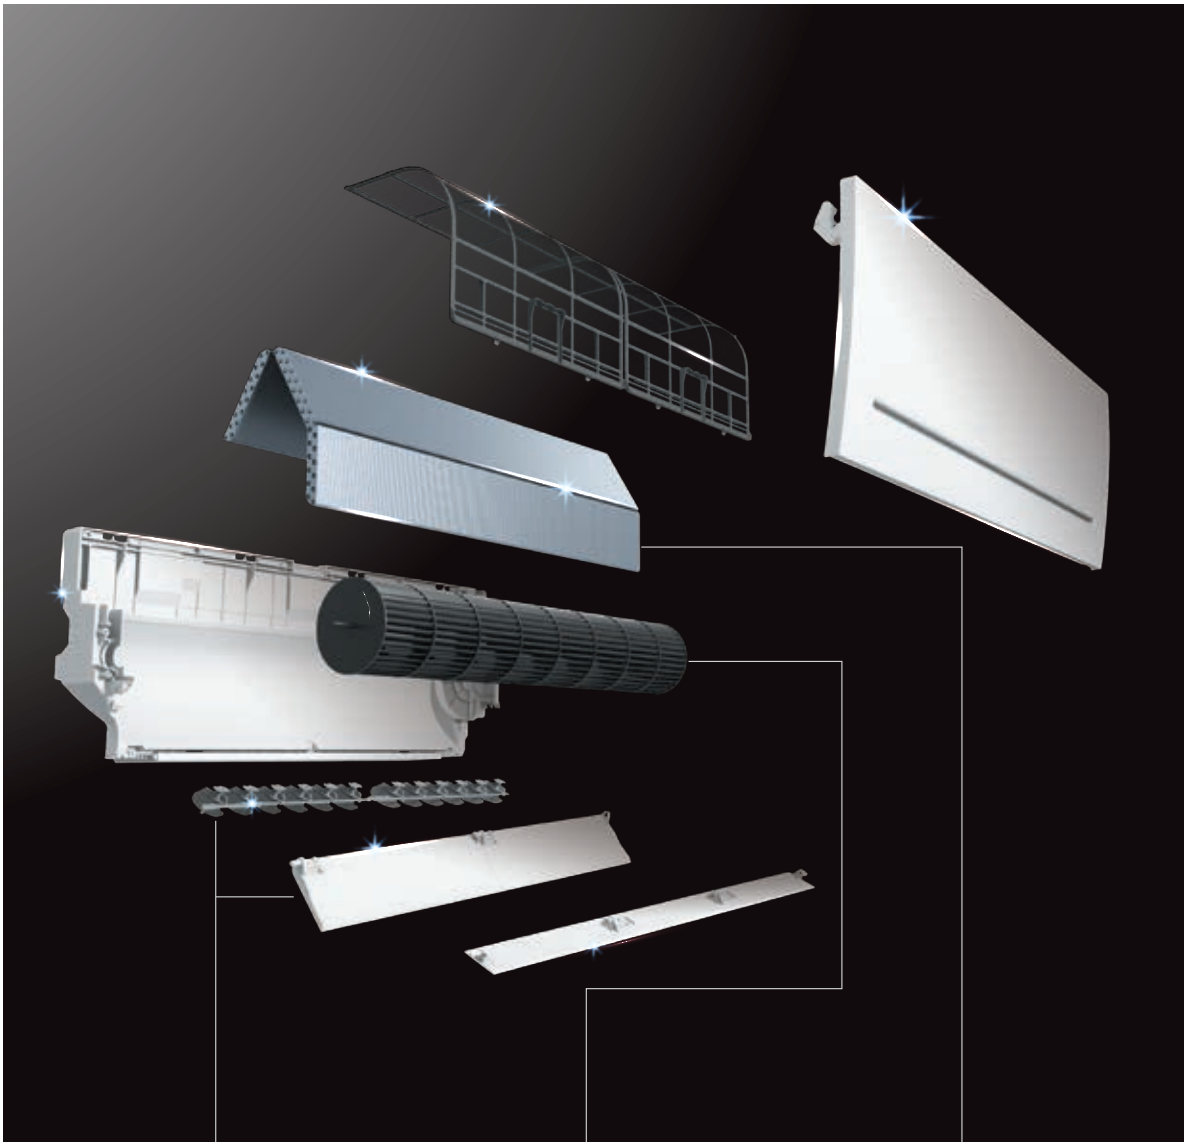

Comfort

Vertical and Horizontal Vane

New vertical and horizontal vanes are double the size of the previous model, improving airflow control elaborately.

175% larger

204% larger

High Performance

Line Flow Fan

New line flow Fan is 122% larger and 108% wider than the previous model, leading to higher aerodynamic performance. Also, same sound level as the previous model.

122% larger

108% larger

High Performance

Heat Exchanger

New ø5 Heat exchanger enables to realise 32% thinner depth than the previous model. It realises low pressure loss leading to high performance.

32% Thinner

“Weekly Timer”

Weekly
Timer

Easily set desired temperatures and operation start/stop times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

■ Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
6:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
8:00	Automatically changes to high-power operation at wake-up time						
10:00	OFF	OFF	OFF	OFF	OFF	ON 18°C	ON 18°C
12:00	Automatically turned off during work hours					Midday is warmer, so the temperature is set lower	
14:00							
16:00							
18:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
20:00	Automatically turns on, synchronized with arrival at home					Automatically raises temperature setting to match time when outside-air temperature is low	
22:00							
(during sleeping hours)	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C
	Automatically lowers temperature at bedtime for energy-saving operation at night						

Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting *The operation mode cannot be set.


■ Easy set-up using dedicated buttons



The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.



How to set
the Weekly
Timer

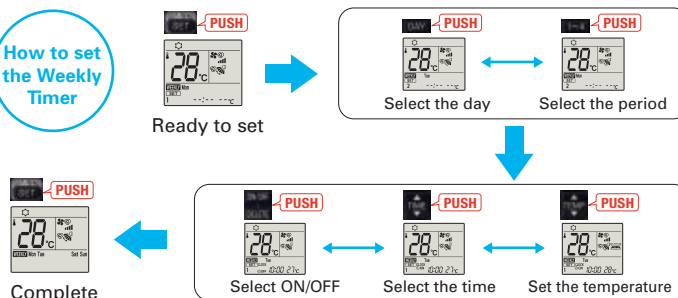


- Start by pushing the “SET” button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the “SET” button one more time. (Push the “SET” button only after inputting all of the desired patterns into the remote controller memory. Pushing the “CANCEL” button will end the set-up process without sending the operation patterns to the indoor unit).
- It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.
- When “Weekly Timer” is set, temperature can not be set 10°C. (only for 15/20 models)

Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

without
“Low standby power”

with
“Low standby power”


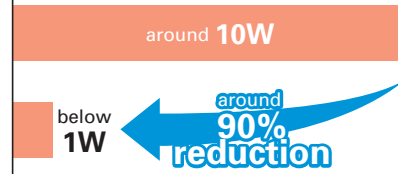


Air Purifying Filter

(MSZ-AP25/35/42/50/60/71)

Air Purifying

This filter generates stable antibacterial and deodourising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.




* It is okay to wash the filter with water (air-cleaning effect is maintained)

3D surface (Waved surface)

"i save" Mode



"i save" is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting. Using this function contributes to comfortable, waste-free operation, realising the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

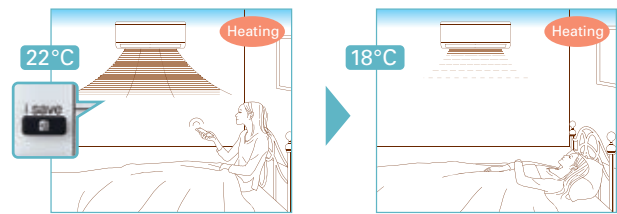

* Temperature can be preset to 10°C when heating in the "i-save" mode. (only for 15/20 models)

Outdoor Units for Cold Region

(MSZ-AP25/35/42/50)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.

Standard Units

Heater Installed



MUZ-AP25/35/42VG



MUZ-AP50VG



MUZ-AP25/35/42VGH



MUZ-AP50VGH

Night Mode


(MSZ-AP20/25/35/42/50/60/71)



When Night Mode is activated using the wireless remote controller, air conditioner operation will switch to the following settings.


- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated operating noise specification.

*The cooling/heating capacity may drop.

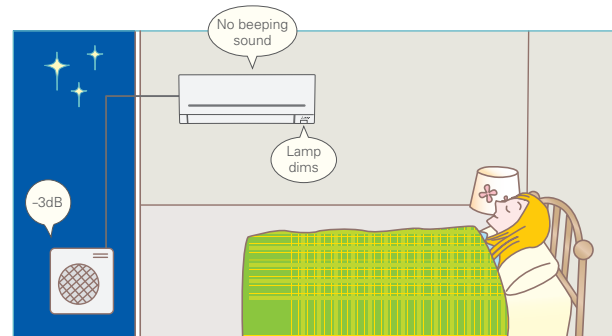

Quiet Operation

The indoor unit noise level is as low as 19dB for AP Series, offering a peaceful inside environment.

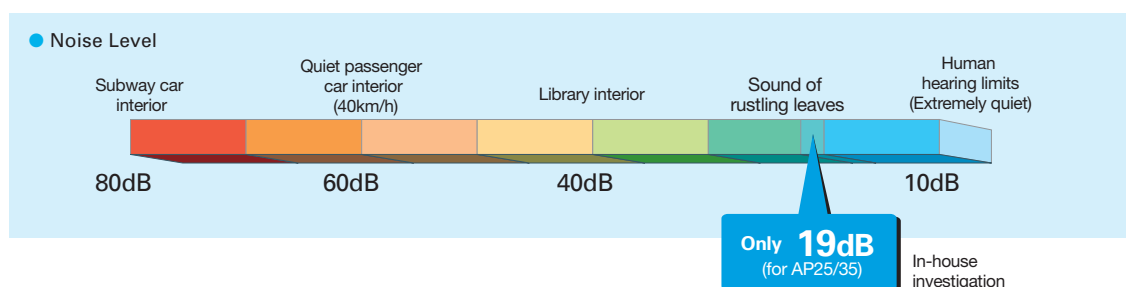

Built-in Wi-Fi Interface

(MSZ-AP25/35/42/50/60/71VGK)



The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.

This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

MSZ-A SERIES

Indoor Unit



MSZ-AP15/20VG



*AP15 for MXZ Connection Only

Outdoor Unit



MUZ-AP20VG

Remote Controller



Type		Inverter Heat Pump						
Indoor Unit		MSZ-AP15VG	MSZ-AP20VG	MSZ-AP25VG(K)	MSZ-AP25VG(K)	MSZ-AP35VG(K)	MSZ-AP35VG(K)	MSZ-AP35VG(K)
Outdoor Unit		for MXZ connection	MUZ-AP20VG	MUZ-AP25VG	MUZ-AP25VG	MUZ-AP35VG	MUZ-AP35VG	MUZ-AP35VG
Refrigerant		Single: R32 ⁽¹⁾ / Multi: R410A or R32 ⁽¹⁾						
Power Supply		Outdoor Power supply						
Outdoor (V / Phase / Hz)		230 / Single / 50						
Cooling	Design load	kW	-	2.0	2.5	2.5	3.5	3.5
	Annual electricity consumption ⁽²⁾	kWh/a	-	81	101	101	142	142
	SEER ⁽⁴⁾	-	-	8.6	8.6	8.6	8.6	8.6
	Energy efficiency class		-	A+++	A+++	A+++	A+++	A+++
	Capacity	kW	-	2.0	2.5	2.5	3.5	3.5
	Min-Max	kW	-	0.6-2.7	0.9-3.4	0.9-3.4	1.1-3.8	1.1-3.8
Heating (Average Season) ⁽⁵⁾	Total Input	Rated	kW	0.460	0.600	0.600	0.990	0.990
	Design load	kW	-	2.3 (-10°C)	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)
	Declared Capacity	at reference design temperature	kW	-	2.3 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)
		at bivalent temperature	kW	-	2.3 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)
		at operation limit temperature	kW	-	2.2 (-15°C)	2.4 (-15°C)	2.6 (-15°C)	2.4 (-20°C)
	Back up heating capacity	kW	-	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	-	766	698	703	862	873
	SCOP ⁽⁴⁾	-	-	4.2	4.8	4.7	4.7	4.6
	Energy efficiency class		-	A+	A++	A++	A++	A++
	Capacity	kW	-	2.5	3.2	3.2	4.0	4.0
Indoor Unit	Min-Max	kW	-	0.5-3.5	1.0-4.1	1.0-4.1	1.3-4.6	1.3-4.6
	Total Input	Rated	kW	0.600	0.780	0.780	1.030	1.030
	Operating Current (Max)	A	-	7.0	7.1	7.1	8.5	8.5
	Input	Rated	kW	0.017	0.019	0.026	0.026	0.026
	Operating Current (Max)	A	-	0.17	0.2	0.3	0.3	0.3
	Dimensions	H*W*D	mm	250-760-178	250-760-178	299-798-219	299-798-219	299-798-219
	Weight	kg	-	8.2	8.2	10.5	10.5	10.5
	Air Volume (SL-Lo-Mid-Hi-SH ⁽³⁾) (Dry/Wet)	Cooling	m ³ /min	3.5 - 3.9 - 4.6 - 5.5 - 6.4	3.5 - 3.9 - 4.6 - 5.5 - 6.9	4.9 - 5.9 - 7.1 - 8.7 - 11.4	4.9 - 5.9 - 7.1 - 8.7 - 11.4	4.9 - 5.9 - 7.1 - 8.7 - 11.4
		Heating	m ³ /min	3.7 - 4.4 - 5.0 - 6.0 - 6.8	3.7 - 4.4 - 5.0 - 6.0 - 7.3	4.9 - 5.9 - 7.3 - 8.9 - 12.9	4.9 - 5.9 - 7.3 - 8.9 - 12.9	4.9 - 5.9 - 7.3 - 8.9 - 12.9
	Sound Level (SPL) (SL-Lo-Mid-Hi-SH ⁽³⁾)	dB(A)	-	21 - 26 - 30 - 35 - 40	21 - 26 - 30 - 35 - 42	19 - 24 - 30 - 36 - 42	19 - 24 - 30 - 36 - 42	19 - 24 - 30 - 36 - 42
Outdoor Unit	Sound Level (PWL)	dB(A)	-	59	60	57	57	57
	Dimensions	H*W*D	mm	-	550-800-285	550-800-285	550-800-285	550-800-285
	Weight	kg	-	-	31	31	31	31
	Air Volume	Cooling	m ³ /min	-	32.2	32.2	32.2	32.2
		Heating	m ³ /min	-	29.8	29.8	33.8	33.8
	Sound Level (SPL)	dB(A)	-	-	47	47	49	49
	Sound Level (PWL)	dB(A)	-	-	48	48	50	50
	Operating Current (Max)	A	-	-	59	59	61	61
	Breaker Size	A	-	-	6.8	6.8	8.2	8.2
	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
Ext. Piping	Max.Length	Out-In	m	-	20	20	20	20
	Max.Height	Out-In	m	-	12	12	12	12
	Guaranteed Operating Range (Outdoor)	Cooling	°C	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
		Heating	°C	-	-15 ~ +24	-15 ~ +24	-15 ~ +24	-20 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MSZ-A SERIES



Indoor Unit

R32 R410A

※VGK model Wi-Fi Interface built-in.



MSZ-AP25/35/42/50VG(K)



MSZ-AP60/71VG(K)

Outdoor Unit

R32



MUZ-AP25/35/42VG(H)



MUZ-AP50VG(H)/60VG



MUZ-AP71VG

Remote Controller



Type			Inverter Heat Pump						
Indoor Unit			MSZ-AP42VG(K)	MSZ-AP42VG(K)	MSZ-AP50VG(K)	MSZ-AP50VG(K)	MSZ-AP60VG(K)	MSZ-AP71VG(K)	
Outdoor Unit			MUZ-AP42VG	MUZ-AP42VGH	MUZ-AP50VG	MUZ-AP50VGH	MUZ-AP60VG	MUZ-AP71VG	
Refrigerant			Single: R32 ⁽¹⁾ / Multi: R410A or R32 ⁽¹⁾				Single: R32 ⁽¹⁾		
Power Supply	Source		Outdoor Power supply						
	Outdoor (V / Phase / Hz)		230 / Single / 50						
Cooling	Design load	kW	4.2	4.2	5.0	5.0	6.1	7.1	
	Annual electricity consumption ⁽²⁾	kWh/a	188	188	236	236	288	345	
	SEER ⁽⁴⁾		7.8	7.8	7.4	7.4	7.4	7.2	
	Energy efficiency class		A++	A++	A++	A++	A++	A++	
		Rated	kW	4.2	4.2	5.0	5.0	6.1	7.1
Capacity	Min-Max	kW	0.9-4.5	0.9-4.5	1.4-5.4	1.4-5.4	1.4-7.3	2.0-8.7	
Total Input	Rated	kW	1.300	1.300	1.550	1.550	1.590	2.010	
Heating (Average Season) ⁽³⁾	Design load	kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)	4.6 (-10°C)	6.7 (-10°C)	
	Declared Capacity	at reference design temperature	kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)	4.6 (-10°C)	6.7 (-10°C)
		at bivalent temperature	kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)	4.6 (-10°C)	6.7 (-10°C)
		at operation limit temperature	kW	4.2 (-15°C)	3.8 (-20°C)	4.7 (-15°C)	4.2 (-20°C)	3.7 (-15°C)	5.4 (-15°C)
		Back up heating capacity	kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	1120	1134	1250	1275	1398	2132	
	SCOP ⁽⁴⁾		4.7	4.6	4.7	4.6	4.6	4.4	
	Capacity	Energy efficiency class		A++	A++	A++	A++	A++	A+
		Rated	kW	5.4	5.4	5.8	5.8	6.8	8.1
		Min-Max	kW	1.3-6.0	1.3-6.0	1.4-7.3	1.4-7.3	2.0-8.6	2.2-10.3
Total Input	Rated	kW	1.490	1.490	1.600	1.600	1.670	2.120	
Operating Current (Max)		A	9.9	9.9	13.6	13.6	14.1	16.4	
Indoor Unit	Input	Rated	kW	0.032	0.032	0.032	0.032	0.049	0.045
	Operating Current (Max)		A	0.3	0.3	0.3	0.3	0.5	0.4
	Dimensions	H*W*D	mm	299-798-219	299-798-219	299-798-219	299-798-219	325-1100-257	325-1100-257
	Weight	kg	10.5	10.5	10.5	10.5	16.0	17.0	
	Air Volume (SLo-Lo-Mid-Hi-SH ⁽³⁾ Dry/Wet)	Cooling	m³/min	5.4 - 6.5 - 7.7 - 9.3 - 11.4	5.4 - 6.5 - 7.7 - 9.3 - 11.4	6.0 - 7.2 - 8.4 - 10.0 - 12.6	6.0 - 7.2 - 8.4 - 10.0 - 12.6	9.4 - 11.0 - 13.2 - 16.0 - 18.9	9.6 - 11.5 - 13.2 - 15.3 - 18.6
		Heating	m³/min	5.3 - 6.1 - 7.7 - 9.4 - 14.0	5.3 - 6.1 - 7.7 - 9.4 - 14.0	5.6 - 6.5 - 8.2 - 10.0 - 14.0	5.6 - 6.5 - 8.2 - 10.0 - 14.0	10.8 - 13.4 - 15.4 - 17.4 - 20.3	10.2 - 11.5 - 13.2 - 15.3 - 19.2
	Sound Level (SPL)	Cooling	dB(A)	21 - 29 - 34 - 38 - 42	21 - 29 - 34 - 38 - 42	28 - 33 - 36 - 40 - 44	28 - 33 - 36 - 40 - 44	29 - 37 - 41 - 45 - 48	30 - 37 - 41 - 45 - 49
	(SLo-Lo-Mid-Hi-SH ⁽³⁾)	Heating	dB(A)	21 - 29 - 35 - 40 - 45	21 - 29 - 35 - 40 - 45	28 - 33 - 38 - 43 - 48	28 - 33 - 38 - 43 - 48	30 - 37 - 41 - 45 - 48	30 - 37 - 41 - 45 - 51
	Sound Level (PWL)	Cooling	dB(A)	57	57	58	58	65	65
		Heating	dB(A)	57	57	58	58	65	65
Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285	714-800-285	714-800-285	880-840-330	
Weight	kg	35	35	40	40	40	55		
Outdoor Unit	Air Volume	Cooling	m³/min	30.4	30.4	40.5	40.5	52.1	54.1
		Heating	m³/min	32.7	32.7	40.5	40.5	52.1	47.9
	Sound Level (SPL)	Cooling	dB(A)	50	50	52	52	56	56
		Heating	dB(A)	51	51	52	52	57	55
	Sound Level (PWL)	Cooling	dB(A)	61	61	64	64	69	69
		Heating	dB(A)	61	61	64	64	69	69
Operating Current (Max)	A	9.6	9.6	13.3	13.3	13.6	16.0		
Breaker Size	A	10	10	16	16	16	20		
Ext. Piping	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7
	Max.Length	Out-In	m	20	20	20	20	30	30
	Max.Height	Out-In	m	12	12	12	12	15	15
Guaranteed Operating Range (Outdoor)	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
	Heating	°C	-15 ~ +24	-20 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

(2) The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(3) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MSZ-E SERIES

Developed to complement modern interior room décor, Kirigamine ZEN air conditioners are available in three colours specially chosen to blend in naturally wherever installed.



MSZ-EF18-50VGB



Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.



Energy-efficient Operation




All models in the series have achieved high energy-savings rating, and are contributing to reduced energy consumption in homes, offices and a range of other settings. Offered in a variety of output capacities and installation patterns, the vast applicability promises an ideal match for any user.

Indoor \ Outdoor	Rank A for single connection MUZ-EF25/35VG(H) MUZ-EF42/50VG	Compatibility					
		MXZ					
		2F33VF	2F42VF	2F53VF	3F54VF	3F68VF	4F72VF
MSZ-EF18VG	—	✓	✓	✓	✓	✓	✓
MSZ-EF22VG	—	✓	✓	✓	✓	✓	✓
MSZ-EF25VG	A+++ / A++(A***)	✓	✓	✓	✓	✓	✓
MSZ-EF35VG	A+++ / A++(A***)		✓	✓	✓	✓	✓
MSZ-EF42VG	A++ / A+			✓	✓	✓	✓
MSZ-EF50VG	A++ / A+			✓	✓	✓	✓

*VEH


Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Silent Mode" fan speed setting provides super-quiet operation as low as 19dB for EF18/22/25 models for cooling. This unique feature makes the Kirigamine ZEN series ideal for use in any situation.

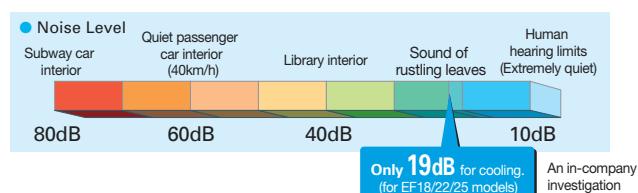


Superior Exterior and Operating Design Concept

The indoor unit of the Kirigamine ZEN keeps its amazingly thin form even during operation. The only physical change notable is the movement of the variable vent. As a result, a slim attractive look is maintained.

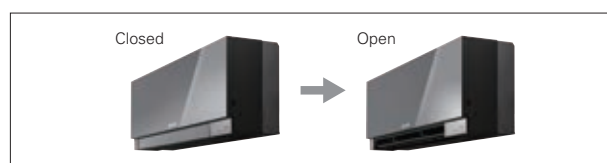

Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

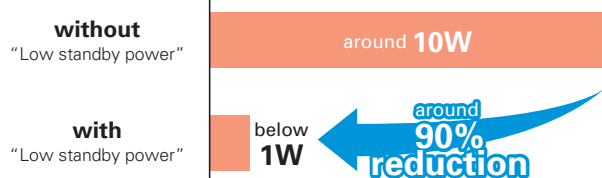

Outdoor Units for Cold Region

(25/35)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.

Standard Units



MUZ-EF25/35VG

Heater Installed



MUZ-EF25/35VGH

MSZ-E SERIES



Indoor Unit / Remote Controller

R32 R410A



White



Silver



Black

MSZ-EF18/22/25/35/42/50VG(K)B*

- * Soft-dry Cloth is enclosed with Black models.
- * VGK model Wi-Fi interface built-in

Outdoor Unit

R32



MUZ-EF25/35VG(H), 42VG



MUZ-EF50VG



Type			Inverter Heat Pump						
Indoor Unit			MSZ-EF18VG(K)	MSZ-EF22VG(K)	MSZ-EF25VG(K)	MSZ-EF35VG(K)	MSZ-EF42VG(K)	MSZ-EF50VG(K)	
Outdoor Unit			for MXZ connection		MUZ-EF25VG	MUZ-EF25VGH	MUZ-EF35VG	MUZ-EF35VGH	MUZ-EF42VG
Refrigerant			R32 ⁽¹⁾						
Power Supply	Source		Outdoor Power supply						
	Outdoor (V / Phase / Hz)		230/Single/50						
Cooling	Design load	kW	-	-	2.5	2.5	3.5	3.5	4.2
	Annual electricity consumption ⁽²⁾	kWh/a	-	-	96	96	139	139	186
	SEER ⁽⁴⁾		-	-	9.1	9.1	8.8	8.8	7.9
	Energy efficiency class		-	-	A+++	A+++	A+++	A+++	A++
	Capacity	kW	-	-	2.5	2.5	3.5	3.5	4.2
Heating	Min-Max	kW	-	-	0.9-3.4	0.9-3.4	1.1-4.0	1.1-4.0	0.9-4.6
	Total Input	kW	-	-	0.540	0.540	0.910	0.910	1.200
	Design load	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)
	Declared Capacity	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)
	at reference design temperature	kW	-	-	2.4 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	2.9 (-10°C)	3.8 (-10°C)
Heating (Average Season) ⁽³⁾	at operation limit temperature	kW	-	-	2.0 (-15°C)	1.6 (-20°C)	2.4 (-15°C)	1.7 (-20°C)	3.4 (-15°C)
	Back up heating capacity	kW	-	-	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	-	-	713	727	882	900	1151
	SCOP ⁽⁴⁾		-	-	4.7	4.6	4.6	4.5	4.6
	Energy efficiency class		-	-	A++	A++	A++	A+	A+
Operating Current (Max)	Rated	kW	-	-	3.2	3.2	4.0	4.0	5.4
	Min-Max	kW	-	-	1.0-4.2	1.0-4.2	1.3-5.1	1.3-5.1	1.3-6.3
	Total Input	kW	-	-	0.700	0.700	0.950	0.950	1.455
	Operating Current (Max)	A	-	-	7.1	7.1	7.1	7.1	10.0
	Input	kW	-	-	0.026	0.026	0.030	0.030	0.033
Indoor Unit	Operating Current (Max)	A	-	-	0.3	0.3	0.3	0.3	0.4
	Dimensions	H*W*D	mm	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195
	Weight	kg	-	-	11.5	11.5	11.5	11.5	11.5
	Air Volume (SLoLo-Mid-Hi-SH ⁽⁵⁾ Dry/Wet)	m³/min	40-46-63-83-105	40-46-63-83-105	40-46-63-83-105	40-46-63-83-105	40-46-63-83-105	40-46-63-83-105	58-66-77-89-112
	Sound Level (SPL)	dB(A)	19-23-29-36-42	19-23-29-36-42	19-23-29-36-42	19-23-29-36-42	21-24-30-36-42	21-24-30-36-42	28-31-35-39-43
Outdoor Unit	Sound Level (PWL)	dB(A)	21-24-29-37-45	21-24-29-37-45	21-24-29-37-45	21-24-29-37-45	21-24-30-38-46	21-24-30-38-46	28-30-35-41-48
	Operating Current (Max)	A	-	-	6.8	6.8	6.8	6.8	9.6
	Breaker Size	A	-	-	10	10	10	10	12
	Diameter	mm	-	-	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52
	Max.Length	m	-	-	20	20	20	20	30
Ext. Piping	Max.Height	m	-	-	12	12	12	12	15
	Guaranteed Operating Range (Outdoor)	°C	-	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
		°C	-	-	-15 ~ +24	-20 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MSZ-S SERIES

MSZ-G SERIES


Introducing a compact and stylish indoor unit with amazingly quiet performance. Not only are neat installations in small bedrooms possible, increase energy-savings by selecting the optimal capacity required for each room.



"Rank A++/A+" Energy Savings Achieved for Entire Range of Series



All models in the series, from the low-capacity 25 to the high-capacity 71, have achieved the "Rank A++" for SEER and "Rank A+" for SCOP as energy-savings rating. For home use, such as in bedrooms and living rooms, to light commercial use, such as in offices, our air conditioners are contributing to reduced energy consumption in a wide range.

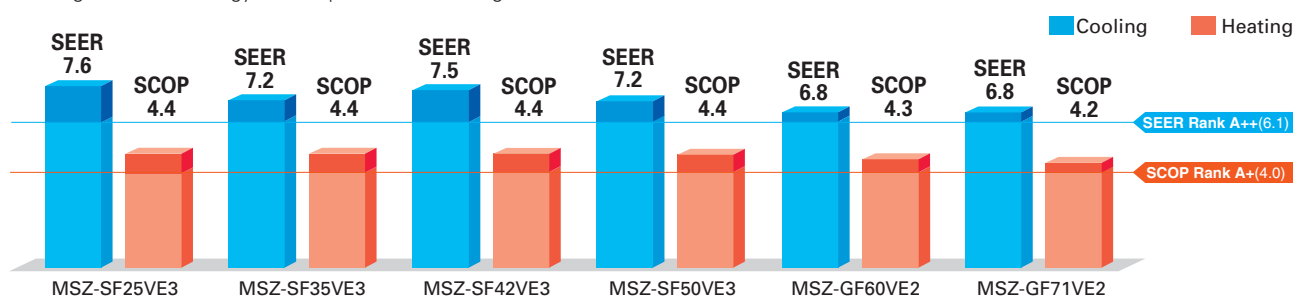

Wide Line-up

Eight different indoor units (Model 15-71) are available to meet your diversified air conditioning needs.



Compact and Stylish

(MSZ-SF15/20VA)

The stylish, square indoor unit adds a touch of class to any room interior. The compact design is 64mm thinner than our previous indoor unit with the lowest output capacity (MSZ-GE22VA).

Comparison with our previous model GE




Family Design

(MSZ-SF15/20/25/35/42/50)

Models in the 25-50 class are introduced as single-split units while retaining the popular design of the SF15/20VA* as indoor units exclusively for multi-systems. From small rooms to living rooms, it is possible to coordinate residences with a unified design.

*Size may vary.

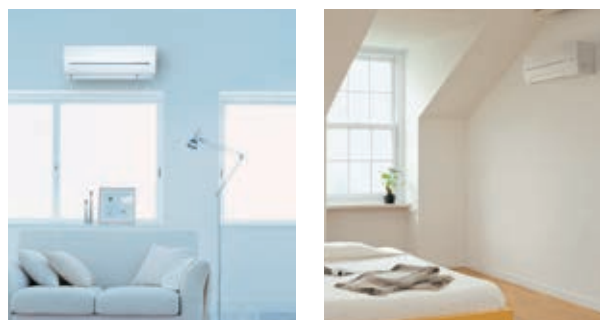

“Weekly Timer”



Easily set desired temperatures and operation start/stop times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

■ Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
6:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
8:00	Automatically changes to high-power operation at wake-up time						
10:00	OFF	OFF	OFF	OFF	OFF	ON 18°C	ON 18°C
12:00	Automatically turned off during work hours						Midday is warmer, so the temperature is set lower
14:00							
16:00							
18:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
20:00	Automatically turns on, synchronized with arrival at home						Automatically raises temperature setting to match time when outside-air temperature is low
22:00							
(during sleeping hours)	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C
	Automatically lowers temperature at bedtime for energy-saving operation at night						

Settings

Pattern Settings: Input up to four settings for each day

Settings: • Start/Stop operation • Temperature setting *The operation mode cannot be set.


■ Easy set-up using dedicated buttons



The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.



How to set the Weekly Timer

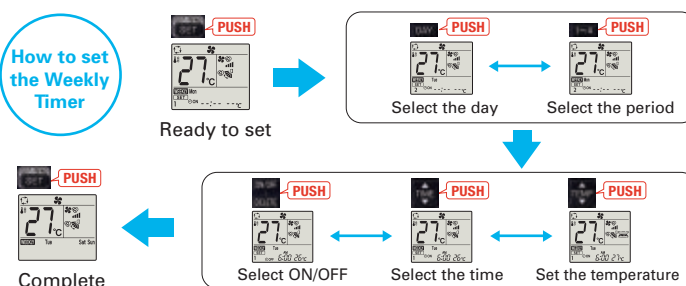

- Start by pushing the “SET” button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the “SET” button one more time. (Push the “SET” button only after inputting all of the desired patterns into the remote controller memory. Pushing the “CANCEL” button will end the set-up process without sending the operation patterns to the indoor unit).
- It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.
- When “Weekly Timer” is set, temperature can not be set 10°C.

Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

without
“Low standby power”


with
“Low standby power”




Air Purifying Filter

(MSZ-SF25/35/42/50, MSZ-GF60/71)

This filter generates stable antibacterial and deodourising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Air Purifying Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.



* It is okay to wash the filter with water (air-cleaning effect is maintained)




3D surface (Waved surface)

“i save” Mode



“i save” is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting. Using this function contributes to comfortable, waste-free operation, realising the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

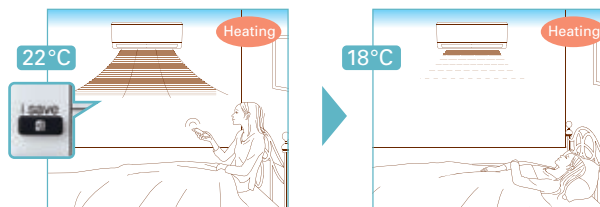

* Temperature can be preset to 10°C when heating in the “i-save” mode.

Outdoor Units for Cold Region (25/35/42/50)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.

Standard Units



MUZ-SF25/35/42VE MUZ-SF50VE

Heater Installed



MUZ-SF25/35/42VEH MUZ-SF50VEH

MSZ-S SERIES



Indoor Unit

R410A



MSZ-SF15/20VA

Outdoor Unit

For MXZ Connection Only

Remote Controller



Type		Inverter Heat Pump					
Indoor Unit		MSZ-SF15VA	MSZ-SF20VA	MSZ-SF25VE3	MSZ-SF25VE3	MSZ-SF35VE3	MSZ-SF35VE3
Outdoor Unit		for MXZ connection		MUZ-SF25VE	MUZ-SF25VEH	MUZ-SF35VE	MUZ-SF35VEH
Refrigerant		R410A ⁽¹⁾					
Power Source		Outdoor Power supply					
Supply Outdoor (V / Phase / Hz)		230/Single/50					
Cooling	Design load	kW	-	-	2.5	2.5	3.5
	Annual electricity consumption ⁽²⁾	kWh/a	-	-	116	116	171
	SEER ⁽³⁾		-	-	7.6	7.6	7.2
	Energy efficiency class		-	-	A++	A++	A++
	Capacity	kW	-	-	2.5	2.5	3.5
	Min-Max	kW	-	-	0.9-3.4	0.9-3.4	1.1-3.8
Heating (Average Season) ⁽⁴⁾	Total Input	Rated	kW	-	0.600	0.600	1.080
	Design load	kW	-	-	2.4(-10°C)	2.4(-10°C)	2.9(-10°C)
	Declared Capacity	at reference design temperature	kW	-	2.4(-10°C)	2.4(-10°C)	2.9(-10°C)
		at bivalent temperature	kW	-	2.4(-10°C)	2.4(-10°C)	2.9(-10°C)
		at operation limit temperature	kW	-	2.0(-15°C)	1.6(-20°C)	1.6(-20°C)
	Back up heating capacity	kW	-	-	0.0(-10°C)	0.0(-10°C)	0.0(-10°C)
Indoor Unit	Annual electricity consumption ⁽²⁾	kWh/a	-	-	764	790	948
	SCOP ⁽⁴⁾		-	-	4.4	4.3	4.3
	Energy efficiency class		-	-	A+	A+	A+
	Capacity	Rated	kW	-	3.2	3.2	4.0
	Min-Max	kW	-	-	1.0-4.1	1.0-4.1	1.3-4.6
	Total Input	Rated	kW	-	0.780	0.780	1.030
Outdoor Unit	Operating Current (Max)	A	-	-	8.4	8.5	8.5
	Input	Rated	kW	0.017	0.019	0.024	0.027
	Operating Current(Max)	A	-	0.17	0.19	0.2	0.3
	Dimensions	H*W*D	mm	250-760-168	250-760-168	299-798-195	299-798-195
	Weight	kg	-	7.7	10	10	10
	Air Volume (SL-Lo-Mid-Hi-SH ⁽⁵⁾ (Dry/Wet))	Cooling	m ³ /min	3.5 - 3.9 - 4.6 - 5.5 - 6.4	3.5 - 3.9 - 4.6 - 5.5 - 6.9	3.2 - 4.1 - 5.6 - 7.2 - 9.1	3.2 - 4.1 - 5.6 - 7.2 - 9.1
Ext. Piping		Heating	m ³ /min	3.7 - 4.4 - 5.0 - 6.0 - 6.8	3.7 - 4.4 - 5.0 - 6.0 - 7.3	3.0 - 4.1 - 6.7 - 8.2 - 10.3	3.0 - 4.1 - 6.7 - 8.3 - 11.0
	Sound Level (SPL)	Cooling	dB(A)	21 - 26 - 30 - 35 - 40	21 - 26 - 30 - 35 - 42	19 ⁽⁶⁾ - 24 - 30 - 36 - 42	19 ⁽⁶⁾ - 24 - 30 - 36 - 42
		Heating	dB(A)	21 - 26 - 30 - 35 - 40	21 - 26 - 30 - 35 - 42	19 ⁽⁶⁾ - 24 - 34 - 39 - 45	19 ⁽⁶⁾ - 24 - 34 - 40 - 46
	Sound Level (PWL)	Cooling	dB(A)	59	60	57	57
	Dimensions	H*W*D	mm	-	-	550-800-285	550-800-285
	Weight	kg	-	-	31	31	31
Guaranteed Operating Range (Outdoor)	Air Volume	Cooling	m ³ /min	-	-	31.1	35.9
		Heating	m ³ /min	-	-	30.7	35.9
	Sound Level (SPL)	Cooling	dB(A)	-	-	47	49
		Heating	dB(A)	-	-	48	50
	Sound Level (PWL)	Cooling	dB(A)	-	-	58	62
	Operating Current (Max)	A	-	-	8.2	8.2	8.2
Breaker Size	Breaker Size	A	-	-	10	10	10
	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52	6.35 / 9.52	6.35 / 9.52
	Max.Length	Out-In	m	-	-	20	20
		Out-In	m	-	-	12	12
	Max.Height	Out-In	m	-	-	-	-
	Guaranteed Operating Range (Outdoor)	Cooling	°C	-	-	-10 ~ +46	-10 ~ +46
		Heating	°C	-	-	-15 ~ +24	-20 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

(6) For single use: only 19dB(A). For multi use (MXZ): 21dB(A).

MSZ-S SERIES MSZ-G SERIES



Indoor Unit

R410A



MSZ-SF25/35/42/50VE3



MSZ-GF60/71VE2

Outdoor Unit

R410A




MUZ-SF25/35/42VE(H)



MUZ-SF50VE(H)
MUZ-GF60/71VE

Remote Controller

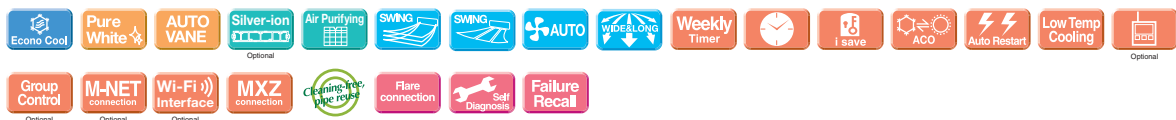

Type				Inverter Heat Pump						
Indoor Unit				MSZ-SF42VE3	MSZ-SF42VE3	MSZ-SF50VE3	MSZ-SF50VE3	MSZ-GF60VE2	MSZ-GF71VE2	
Outdoor Unit				MUZ-SF42VE	MUZ-SF42VEH	MUZ-SF50VE	MUZ-SF50VEH	MUZ-GF60VE	MUZ-GF71VE	
Refrigerant				R410A ⁽¹⁾						
Power Source				Outdoor Power supply						
Supply Outdoor (V / Phase / Hz)				230/Single/50						
Cooling	Design load		kW	4.2	4.2	5.0	5.0	6.1	7.1	
	Annual electricity consumption ⁽²⁾		kWh/a	196	196	246	246	311	364	
	SEER ⁽⁴⁾			7.5	7.5	7.2	7.2	6.8	6.8	
	Energy efficiency class			A++	A++	A++	A++	A++	A++	
	Capacity	Rated	kW	4.2	4.2	5.0	5.0	6.1	7.1	
		Min-Max	kW	0.8-4.5	0.8-4.5	1.4-5.4	1.4-5.4	1.4-7.5	2.0-8.7	
Total Input		Rated	kW	1.340	1.340	1.660	1.660	1.790	2.130	
Heating (Average Season) ⁽³⁾	Design load		kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)	4.6 (-10°C)	6.7 (-10°C)	
	Declared Capacity	at reference design temperature	kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)	4.6 (-10°C)	6.7 (-10°C)	
		at bivalent temperature	kW	3.8 (-10°C)	3.8 (-10°C)	4.2 (-10°C)	4.2 (-10°C)	4.6 (-10°C)	6.7 (-10°C)	
		at operation limit temperature	kW	3.4 (-15°C)	2.2 (-20°C)	3.4 (-15°C)	2.3 (-20°C)	3.7 (-15°C)	5.4 (-15°C)	
	Back up heating capacity		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	
	Annual electricity consumption ⁽²⁾		kWh/a	1215	1242	1351	1380	1489	2204	
	SCOP ⁽⁴⁾			4.4	4.3	4.4	4.3	4.3	4.2	
	Energy efficiency class			A+	A+	A+	A+	A+	A+	
	Capacity	Rated	kW	5.4	5.4	5.8	5.8	6.8	8.1	
		Min-Max	kW	1.3-6.0	1.3-6.0	1.4-7.3	1.4-7.3	2.0-9.3	2.2-9.9	
Total Input		Rated	kW	1.580	1.580	1.700	1.700	1.810	2.230	
Operating Current (Max)				A	9.5	12.3	12.3	14.5	16.6	
Indoor Unit	Input		Rated	kW	0.027	0.027	0.035	0.035	0.062	0.058
	Operating Current(Max)		A	0.3	0.3	0.3	0.3	0.5	0.5	
	Dimensions		H*W*D	mm	299-798-195	299-798-195	299-798-195	299-798-195	325-1100-238	325-1100-238
	Weight		kg	10	10	10	10	16	16	
	Air Volume (SL-Lo-Mid-Hi-SH ⁽³⁾ Dry/Wet)	Cooling	m ³ /min	4.7 - 5.8 - 6.7 - 7.9 - 9.1	4.7 - 5.8 - 6.7 - 7.9 - 9.1	5.1 - 6.2 - 7.0 - 8.2 - 9.9	5.1 - 6.2 - 7.0 - 8.2 - 9.9	9.8-11.3-13.4-15.6-18.3	9.7-11.5-13.3-15.4-17.8	
		Heating	m ³ /min	4.7 - 5.8 - 7.2 - 9.1 - 11.4	4.7 - 5.8 - 7.2 - 9.1 - 11.4	5.1 - 6.4 - 8.0 - 9.8 - 12.0	5.1 - 6.4 - 8.0 - 9.8 - 12.0	9.8-11.3-13.4-15.6-18.3	10.2-11.5-13.3-15.4-17.8	
	Sound Level (SPL) (SL-Lo-Mid-Hi-SH ⁽³⁾)	Cooling	dB(A)	26 ⁽⁶⁾ - 31 - 34 - 38 - 42	26 ⁽⁶⁾ - 31 - 34 - 38 - 42	28 ⁽⁷⁾ - 33 - 36 - 40 - 45	28 ⁽⁷⁾ - 33 - 36 - 40 - 45	29 - 37 - 41 - 45 - 49	30 - 37 - 41 - 45 - 49	
		Heating	dB(A)	26 ⁽⁶⁾ - 31 - 36 - 42 - 47	26 ⁽⁶⁾ - 31 - 36 - 42 - 47	28 ⁽⁷⁾ - 33 - 38 - 43 - 49	28 ⁽⁷⁾ - 33 - 38 - 43 - 49	29 - 37 - 41 - 45 - 49	30 - 37 - 41 - 45 - 49	
	Sound Level (PWL)		Cooling	dB(A)	57	57	58	58	65	65
	Dimensions		H*W*D	mm	550-800-285	550-800-285	880-840-330	880-840-330	880-840-330	880-840-330
Outdoor Unit	Weight		kg	35	35	55	55	50	53	
	Air Volume	Cooling	m ³ /min	35.2	35.2	44.6	44.6	49.2	50.1	
		Heating	m ³ /min	33.6	33.6	44.6	44.6	49.2	48.2	
	Sound Level (SPL)	Cooling	dB(A)	50	50	52	52	55	55	
		Heating	dB(A)	51	51	52	52	55	55	
	Sound Level (PWL)		Cooling	dB(A)	63	63	65	65	65	
	Operating Current (Max)		A	9.2	9.2	12	12	14	16.1	
	Breaker Size		A	10	10	16	16	20	20	
Ext. Piping	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 12.7	6.35/15.88	9.52/15.88	
	Max.Length	Out-In	m	20	20	30	30	30	30	
	Max.Height	Out-In	m	12	12	15	15	15	15	
Guaranteed Operating Range (Outdoor)		Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
		Heating	°C	-15 ~ +24	-20 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid were to be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SH: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

(6) For single use: only 26dB(A). For multi use (MXZ): 28dB(A).

(7) For single use: only 28dB(A). For multi use (MXZ): 30dB(A).

MSZ-BT SERIES

R32
Single / Multi


MSZ-BT20/25/35/50VG(K)



High Energy Efficiency for Entire Range of Series




All models in the series, from the low-capacity 20 to the high-capacity 50, have achieved the "Rank A++" for SEER and size 25 and 35 have achieved the "Rank A++" for SCOP as energy-savings rating. For home use, such as in bedrooms and living rooms, to light commercial use, such as in offices, our air conditioners are contributing to reduced energy consumption in a wide range.

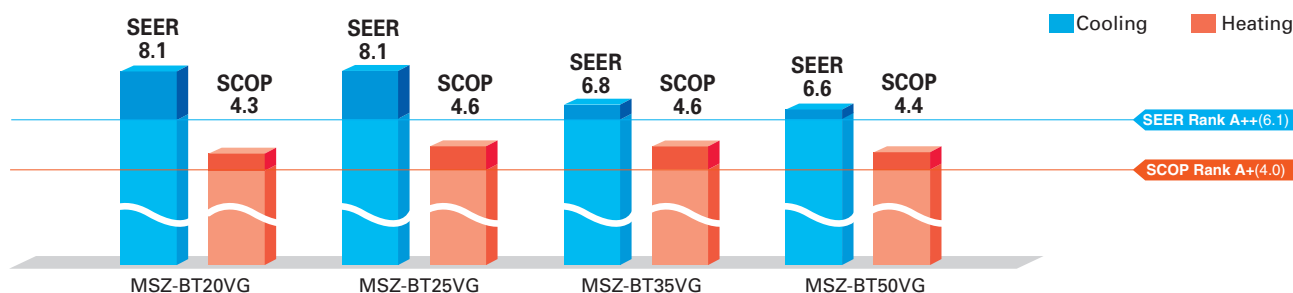

Quiet Operation

The indoor unit noise level is as low as 19dB for AP Series, offering a peaceful inside environment.

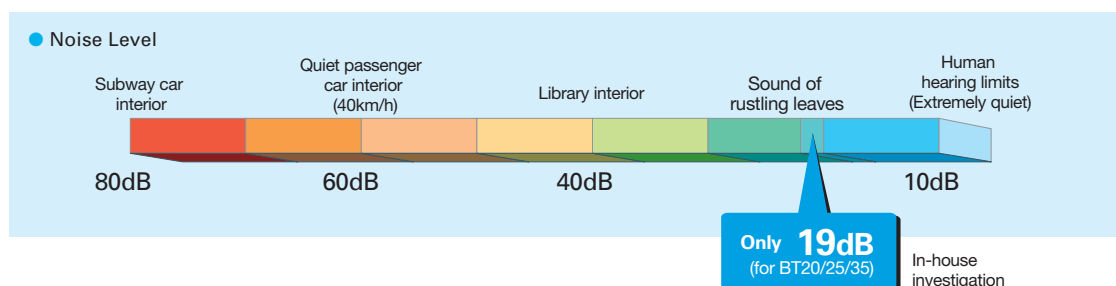

New Remote Controller

New stylish and compact remote controller features easy-read big display and simple button position with fundamental functions.



Built-in Wi-Fi Interface

(MSZ-BT20/25/35/50VGK)



The indoor unit is equipped with a Wi-Fi Interface inside an exclusive pocket in the unit.


This eliminates the need to install a Wi-Fi interface, and also contributes to the beautiful appearance since the interface is hidden.

MSZ-BT SERIES



Indoor Unit

R32

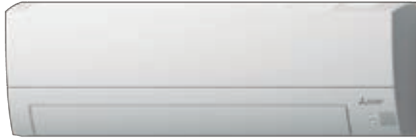

MSZ-BT20/25/35/50VG(K)


Outdoor Unit



MUZ-BT20VG




MUZ-BT25/35VG



MUZ-BT50VG

Remote Controller



Type	Inverter Heat Pump			
Indoor Unit	MSZ-BT20VG	MSZ-BT25VG	MSZ-BT35VG	MSZ-BT50VG
Outdoor Unit	MUZ-BT20VG	MUZ-BT25VG	MUZ-BT35VG	MUZ-BT50VG
Refrigerant	R32 ⁽¹⁾			
Power Supply	Outdoor Power supply 230V/Single/50Hz			
Cooling	Design load	kW	2.0	2.5
	Annual electricity consumption ⁽²⁾	kWh/a	86	108
	SEER ⁽⁴⁾		8.1	8.1
	Energy efficiency class		A++	A++
	Capacity			
Heating (Average Season) ⁽³⁾	Rated	kW	2.0	2.5
	Min-Max	kW	0.5-2.9	0.5-3.0
	Total Input	kW	0.450	0.700
	Design load	kW	1.5 (-10°C)	1.9 (-10°C)
	Declared Capacity			
Heating (Average Season) ⁽³⁾	at reference design temperature	kW	1.5 (-10°C)	1.9 (-10°C)
	at bivalent temperature	kW	1.5 (-10°C)	1.9 (-10°C)
	at operation limit temperature	kW	1.3 (-15°C)	1.7 (-15°C)
	Back up heating capacity	kW	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	487	577
Heating (Average Season) ⁽³⁾	SEER ⁽⁴⁾		4.3	4.6
	Energy efficiency class		A+	A++
	Capacity			
	Rated	kW	2.5	3.15
	Min-Max	kW	0.7-3.2	0.7-3.5
Heating (Average Season) ⁽³⁾	Total Input	kW	0.550	0.750
	Operating Current (Max)	A	5.6	7.0
	Input	kW	0.024	0.031
	Operating Current (Max)	A	0.25	0.31
	Dimensions	H*W*D	280-838-235	280-838-235
Indoor Unit	Weight	kg	9	9
	Air Volume (Lo-Mid-Hi-SH) ⁽⁵⁾ (Dry/Wet)	m³/min	4.2 - 5.2 - 6.8 - 8.7 - 10.9	4.2 - 5.2 - 6.8 - 8.7 - 10.9
	Sound Level (SPL)	dB(A)	19 - 22 - 30 - 37 - 43	19 - 22 - 30 - 37 - 43
	Sound Level (PWL)	dB(A)	20 - 23 - 30 - 37 - 43	20 - 23 - 30 - 37 - 43
	Dimensions	H*W*D	538-699-249	538-699-249
Outdoor Unit	Weight	kg	23	24
	Air Volume	m³/min	30.3	32.2
	Sound Level (SPL)	dB(A)	50	50
	Sound Level (PWL)	dB(A)	63	63
	Operating Current (Max)	A	5.3	6.7
Ext. Piping	Breaker Size	A	10	10
	Diameter	Liquid/Gas	6.35 / 9.52	6.35 / 9.52
	Max.Length	Out-In	20	20
	Max.Height	Out-In	12	12
	Guaranteed Operating Range (Outdoor)	°C	-10 ~ +46	-10 ~ +46

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHi: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MSZ-HR SERIES

Compact, high-performance indoor and outdoor units with R32 that is low global warming potential compared with the current refrigerant R410A contribute to room comfort and to prevent global warming.

R32

MSZ-HR25/35/42/50VF


MSZ-HR60/71VF



"Rank A++/A+" Energy Savings Achieved for Entire Range of Series




All models in the series, from capacity 25 to 71, have achieved the "Rank A++" for SEER and "Rank A+" for SCOP as energy-savings rating, thanks to Mitsubishi Electric's inverter technologies which are adopted to provide automatic adjustment of operation load according to need.

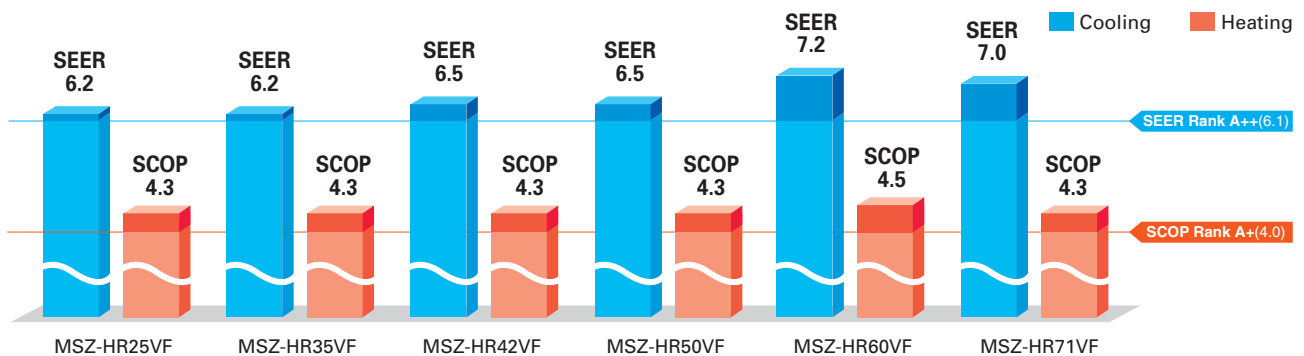

Simple and Friendly Design

The round front surface provides a simple and friendly impression. And the width of indoor unit is compact, making installation in smaller, tighter spaces possible.

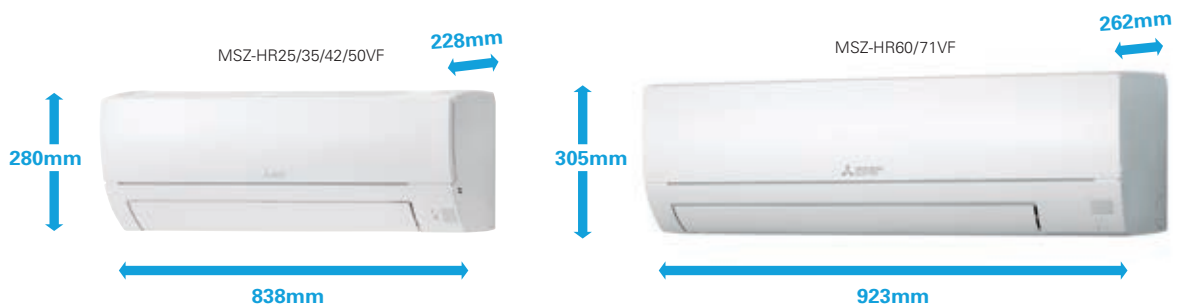

Wi-Fi and System Control


Wi-Fi Interface (Optional)

Optional interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.

System Control Interface (Optional)

- Remote on/off operation is possible by input to the connector.
- Depending on the interface used, connecting a wired remote-control such as the PAR-40MAA is possible.
- Centralised control is possible when connected to M-NET.

*Wi-Fi Interface and System Control Interface cannot be used simultaneously.

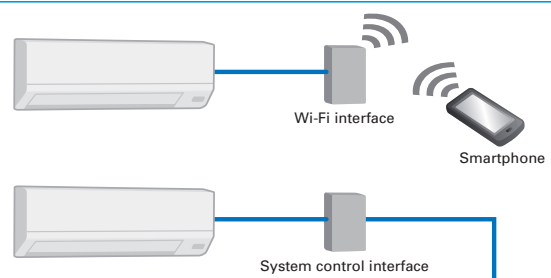

MSZ-HR SERIES



Indoor Unit

R32



MSZ-HR25/35/42/50VF



MSZ-HR60/71VF


Outdoor Unit



MUZ-HR25VF



MUZ-HR35VF




MUZ-HR42/50VF



MUZ-HR60/71VF

Remote Controller



Type		Inverter Heat Pump					
Indoor Unit		MSZ-HR25VF	MSZ-HR35VF	MSZ-HR42VF	MSZ-HR50VF	MSZ-HR60VF	MSZ-HR71VF
Outdoor Unit		MUZ-HR25VF	MUZ-HR35VF	MUZ-HR42VF	MUZ-HR50VF	MUZ-HR60VF	MUZ-HR71VF
Refrigerant		R32 ⁽¹⁾					
Power Supply	Source	Outdoor Power supply					
	Outdoor (V / Phase / Hz)	230V/Single/50Hz					
Cooling	Design load	kW	2.5	3.4	4.2	5.0	6.1
	Annual electricity consumption ⁽²⁾	kWh/a	141	191	226	269	355
	SEER ⁽⁴⁾		6.2	6.2	6.5	6.5	7.0
	Energy efficiency class		A++	A++	A++	A++	A++
	Capacity	Rated	kW	2.5	3.4	4.2	5.0
		Min-Max	kW	0.5-2.9	0.9-3.4	1.1-4.6	1.3-5.0
Heating (Average Season) ⁽⁵⁾	Total Input	Rated	kW	0.800	1.210	1.340	2.050
	Design load	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)
		at reference design temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)
	Declared Capacity	at bivalent temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)
		at operation limit temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)
	Back up heating capacity	kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	614	781	928	1224	1430
	SCOP ⁽⁴⁾		4.3	4.3	4.3	4.3	4.3
	Energy efficiency class		A+	A+	A+	A+	A+
	Capacity	Rated	kW	3.15	3.6	4.7	5.4
		Min-Max	kW	0.7-3.5	0.9-3.7	0.9-5.4	1.4-6.5
	Total Input	Rated	kW	0.850	0.975	1.300	1.550
Operating Current (Max)		A	5.0	6.7	8.5	10.0	14.1
Indoor Unit	Input	Rated	kW	0.020	0.028	0.032	0.039
	Operating Current(Max)	A	0.2	0.27	0.3	0.36	0.5
	Dimensions	H*W*D	mm	280-838-228	280-838-228	280-838-228	305-923-262
	Weight	kg	8.5	8.5	9	9	12.5
	Air Volume (Lo-Mid-Hi-SH ⁽³⁾ Dry/Wet)	Cooling	m³/min	3.6 - 5.4 - 7.2 - 9.7	3.6 - 5.6 - 7.8 - 11.7	6.0 - 8.7 - 10.8 - 13.1	6.4 - 9.2 - 11.2 - 13.1
		Heating	m³/min	3.3 - 5.4 - 7.4 - 10.1	3.3 - 5.4 - 7.4 - 10.5	5.6 - 7.9 - 10.8 - 13.4	6.1 - 8.3 - 11.2 - 14.5
	Sound Level (SPL) (Lo-Mid-Hi-SH ⁽³⁾)	Cooling	dB(A)	21 - 30 - 37 - 43	22 - 31 - 38 - 46	24 - 34 - 39 - 45	28 - 36 - 40 - 45
		Heating	dB(A)	21 - 30 - 37 - 43	21 - 30 - 37 - 44	24 - 32 - 40 - 46	27 - 34 - 41 - 47
	Sound Level (PWL)	Cooling	dB(A)	57	60	60	60
		Heating	dB(A)	57	60	60	60
Outdoor Unit	Dimensions	H*W*D	mm	538-699-249	538-699-249	550-800-285	550-800-285
	Weight	kg	23	24	34	35	40
	Air Volume	Cooling	m³/min	30.3	32.2	30.4	30.4
		Heating	m³/min	30.3	32.2	32.7	32.7
	Sound Level (SPL)	Cooling	dB(A)	50	51	50	53
		Heating	dB(A)	50	51	51	57
	Sound Level (PWL)	Cooling	dB(A)	63	64	64	65
		Heating	dB(A)	63	64	64	66
	Operating Current (Max)	A	4.8	6.4	8.2	9.6	13.6
	Breaker Size	A	10	10	10	12	16
Ext. Piping	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7
	Max.Length	Out-In	m	20	20	20	30
	Max.Height	Out-In	m	12	12	12	15
	Guaranteed Operating Range (Outdoor)	Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
		Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHi: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MSY-TP_{SERIES}


Cooling only model with high-performance provide high SHF in various environments thanks to wide operation range.

R32

MSY-TP35/50VF




High Energy-Saving Performance with High SHF

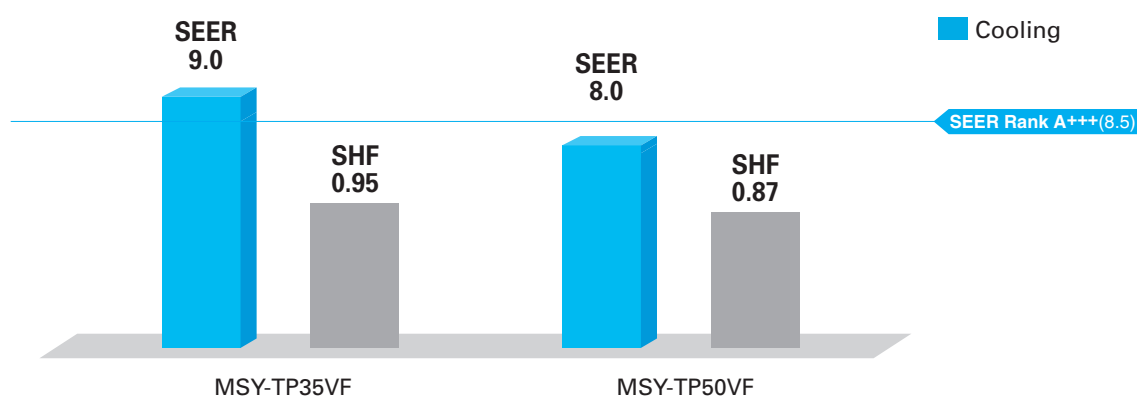

Wide Cooling Operating Range

As a result of an extended operating range in cooling, these models accommodate a wide range of usage environments and applications.

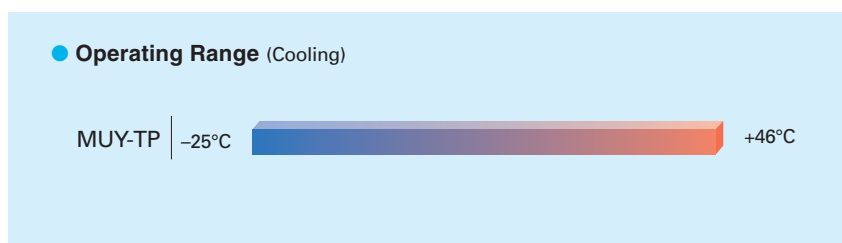

MSY-TP SERIES



Indoor Unit

R32



MSY-TP35/50VF

Outdoor Unit


R32



MUY-TP35/TP50VF

Remote Controller

- Wired remote controller can be connected to indoor unit.



Type				Inverter Heat Pump			
Indoor Unit				MSY-TP35VF		MSY-TP50VF	
Outdoor Unit				MUY-TP35VF		MUY-TP50VF	
Refrigerant				R32 ^(*)			
Power Source				Indoor Power supply			
Supply Outdoor (V / Phase / Hz)				230V / Single / 50Hz			
Cooling	Design load		kW	3.5		5.0	
	Annual electricity consumption ⁽²⁾		kWh/a	136		218	
	SEER ^(*)			9.0		8.0	
	Energy efficiency class			A+++		A++	
	Capacity	Rated	kW	3.5		5.0	
		Min-Max	kW	1.5 - 4.0		1.5 - 5.7	
Total Input		Rated	kW	0.760		1.450	
Heating (Average Season) ⁽³⁾	Design load		kW	-		-	
	Declared Capacity	at reference design temperature	kW	-		-	
		at bivalent temperature	kW	-		-	
		at operation limit temperature	kW	-		-	
	Back up heating capacity		kW	-		-	
	Annual electricity consumption ⁽²⁾		kWh/a	-		-	
	SCOP ^(*)			-		-	
	Energy efficiency class			-		-	
	Capacity	Rated	kW	-		-	
Min-Max		kW	-		-		
Total Input		Rated	kW	-		-	
Operating Current (Max)			A	9.6		9.6	
Indoor Unit	Input	Rated	kW	0.033		0.034	
	Operating Current (Max)		A	0.4		0.4	
	Dimensions		H*W*D	mm		305-923-250	
	Weight		kg	12.5		12.5	
	Air Volume (Lo-Mid-Hi-SH ^(*) /Dry/Wet)	Cooling	m³/min	10.1 - 11.6 - 13.7 - 16.4		10.1 - 11.6 - 13.7 - 16.4	
		Heating	m³/min	-		-	
	Sound Level (SPL) (Lo-Mid-Hi-SH ^(*))	Cooling	dB(A)	31 - 36 - 40 - 45		31 - 36 - 40 - 45	
		Heating	dB(A)	-		-	
	Sound Level (PWL)	Cooling	dB(A)	60		60	
Breaker Size		A	10		10		
Outdoor Unit	Dimensions		H*W*D	mm		550-800-285	
	Weight		kg	34		34	
	Air Volume	Cooling	m³/min	29.3		29.3	
		Heating	m³/min	-		-	
	Sound Level (SPL)	Cooling	dB(A)	45		47	
		Heating	dB(A)	-		-	
	Sound Level (PWL)	Cooling	dB(A)	58		61	
Operating Current (Max)		A	9.2		9.2		
Ext. Piping	Diameter	Liquid/Gas	mm	6.35/9.52		6.35/9.52	
	Max.Length	Out-In	m	20		20	
	Max.Height	Out-In	m	12		12	
Guaranteed Operating Range (Outdoor)		Cooling	°C	-25 ~ +46		-25 ~ +46	
		Heating	°C	-		-	

(*)1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*)2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*)3 SHi: Super High

(*)4 SEER and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011.

MSZ-D SERIES

Compact, high-performance indoor and outdoor units equipped with high-performance air purifying filters contribute to greater room comfort. Wi-Fi and system controller connectivity enable enhanced expandability.

R410A


MSZ-DM25/35VA



Advanced Inverter Control – Efficient Operation All the Time




Mitsubishi Electric's cutting-edge inverter technologies are adopted to provide automatic adjustment of operation load according to need. This reduces excessive consumption of electricity, and thereby realises an Energy Rank "A+".

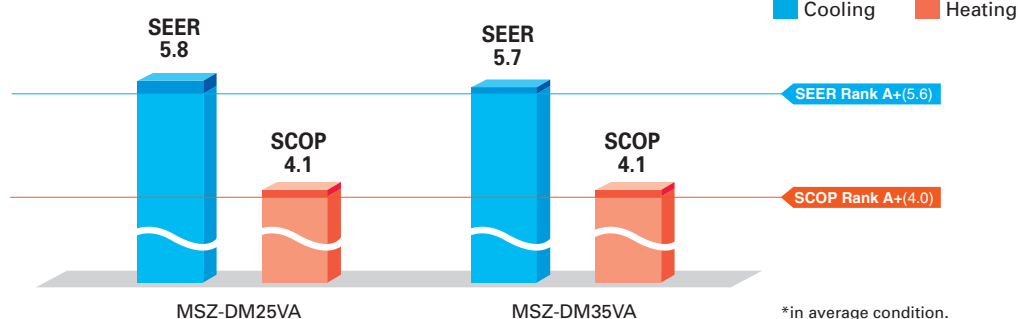

Wider Cooling Operating Range

As a result of an extended operating range in cooling, these models accommodate a wider range of usage environments and applications than previous models.

Operating Range (Cooling)



Wi-Fi and System Control


Wi-Fi Interface (Optional)

Optional interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.

System Control Interface (Optional)


- Remote on/off operation is possible by input to the connector.
- Depending on the interface used, connecting a wired remote-control such as the PAR-40MAA is possible.
- Centralised control is possible when connected to M-NET.

*Wi-Fi Interface and System Control Interface cannot be used simultaneously.

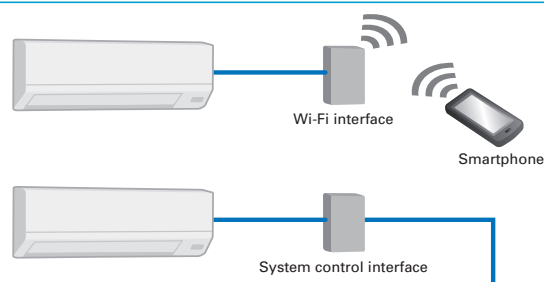

Silver-ionized Air Purifying Filter

The high performance filter is attached as standard. Captures the bacteria, pollen and other allergens in the air and neutralises them.

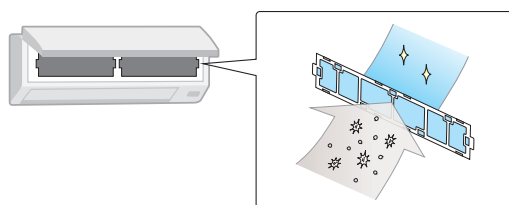

Compact Units

The width of both indoor and outdoor units are compact, making installation in smaller, tighter spaces possible.

Indoor Unit: MSZ-DM25VA



Only 799mm width

Outdoor Unit: MUZ-DM25/35VA



Only 699mm width

MSZ-D SERIES



Indoor Unit

R410A



MSZ-DM25/35VA


Outdoor Unit

R410A



MUZ-DM25/35VA

Remote Controller



Type				Inverter Heat Pump	
Indoor Unit				MSZ-DM25VA	
Outdoor Unit				MUZ-DM25VA	
Refrigerant				R410A ⁽¹⁾	
Power Supply		Source		Indoor Power supply	
		Outdoor (V / Phase / Hz)		230V/Single/50Hz	
Cooling	Design load		kW	2.5	
	Annual electricity consumption ⁽²⁾		kWh/a	149	
	SEER ⁽⁴⁾			5.8	
	Energy efficiency class			A ⁺	
	Capacity	Rated	kW	2.5	
		Min-Max	kW	1.3 - 3.0	
	Total Input	Rated	kW	0.710	
Heating (Average Season) ⁽³⁾	Design load		kW	1.9 (-10°C)	
	Declared Capacity	at reference design temperature	kW	1.9 (-10°C)	
		at bivalent temperature	kW	1.9 (-10°C)	
		at operation limit temperature	kW	1.9 (-10°C)	
	Back up heating capacity		kW	0.0 (-10°C)	
	Annual electricity consumption ⁽²⁾		kWh/a	647	
	SCOP ⁽⁴⁾			4.1	
	Energy efficiency class			A ⁺	
	Capacity	Rated	kW	3.15	
		Min-Max	kW	0.9 - 3.5	
	Total Input	Rated	kW	0.850	
Operating Current (Max)				A	
Indoor Unit	Input		Rated	kW	0.020
	Operating Current(Max)		A		0.3
	Dimensions		H*W*D	mm	290-799-232
	Weight		kg		9
	Air Volume (SLo-Lo-Mid-Hi-SH ⁽⁵⁾ Dry/Wet)	Cooling	m³/min	3.8 - 5.5 - 7.3 - 9.5	
		Heating	m³/min	3.5 - 5.5 - 7.5 - 10.0	
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SH ⁽⁵⁾)	Cooling	dB(A)	22 - 30 - 37 - 43	
		Heating	dB(A)	23 - 30 - 37 - 43	
	Sound Level (PWL)	Cooling	dB(A)	57	
Outdoor Unit	Dimensions		H*W*D	mm	538-699-249
	Weight		kg		24
	Air Volume	Cooling	m³/min	31.5	
		Heating	m³/min	31.5	
	Sound Level (SPL)	Cooling	dB(A)	50	
		Heating	dB(A)	50	
	Sound Level (PWL)	Cooling	dB(A)	63	
		Heating	dB(A)	63	
	Operating Current (Max)		A		5.5
Breaker Size		A		10	
Ext. Piping	Diameter	Liquid/Gas	mm	6.35/9.52	
	Max.Length	Out-In	m	20	
	Max.Height	Out-In	m	12	
Guaranteed Operating Range (Outdoor)	Cooling	°C	-10 ~ +46		-10 ~ +46
	Heating	°C	-10 ~ +24		-10 ~ +24

⁽¹⁾ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

⁽²⁾ Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

⁽³⁾ SHI: Super High

⁽⁴⁾ SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

⁽⁵⁾ Please see page 51-52 for heating (warmer season) specifications.

MSZ-H SERIES

Compact, high-performance indoor and outdoor units and advanced inverter technologies provide superior energy savings and comfort in all rooms.

R410A

MSZ-HJ25/35/50VA

MSZ-HJ60/71VA

Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.



Advanced Inverter Control – Efficient Operation All the Time


DC Inverter



Mitsubishi Electric's cutting-edge inverter technologies are adopted to provide automatic adjustment of operation load according to need. This reduces excessive consumption of electricity, and thereby realises an Energy Rank "A" rating for 25/35 classes and "A+" for 50/60/71 classes.

Silent Operation

Quiet, relaxing space is within reach. Operational noise is a low 22dB (25/35 classes). Operation is so silent you might even forget the air conditioner is on.

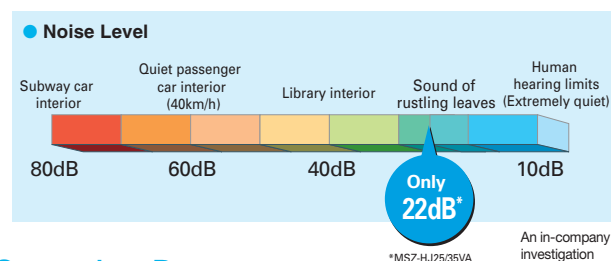


Long Piping Length

Compared to previous models, the piping length is significantly increased, further enhancing the ease and flexibility of installation.

	MSZ-HJ60/71	MSZ-HJ25/35/50	MSZ-HC
Max piping length	30m	20m	10m
Max piping height difference	15m	12m	5m

Operating Range

As a result of an extended operating range in cooling, these models accommodate a wider range of usage environments and applications than previous models.

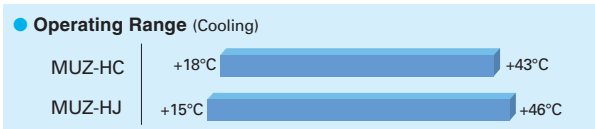

Compact Units

The widths of both indoor and outdoor units are compact, making installation in smaller, tighter spaces possible.

Indoor Unit: MSZ-HJ25/35/50VA



Only 799mm width

Outdoor Unit: MUZ-HJ25/35VA



Only 699mm width

Compared to other models, width is down by 16%.



MSZ-H SERIES



Indoor Unit

R410A



MSZ-HJ25/35/50VA



MSZ-HJ60/71VA

Outdoor Unit

R410A



MUZ-HJ25/35VA



MUZ-HJ50VA



MUZ-HJ60/71VA

Remote Controller



Type	Inverter Heat Pump				
Indoor Unit	MSZ-HJ25VA	MSZ-HJ35VA	MSZ-HJ50VA	MSZ-HJ60VA	MSZ-HJ71VA
Outdoor Unit	MUZ-HJ25VA	MUZ-HJ35VA	MUZ-HJ50VA	MUZ-HJ60VA	MUZ-HJ71VA
Refrigerant	R410A ⁽¹⁾				
Power Supply	Indoor Power supply 230V/Single/50Hz				
Cooling	Source	Outdoor (V / Phase / Hz)			
	Design load	kW	2.5	3.1	5.0
	Annual electricity consumption ⁽²⁾	kWh/a	171	212	292
	SEER ⁽⁴⁾		5.1	5.1	6.0
	Energy efficiency class		A	A	A+
	Capacity				
Heating	Rated	kW	2.5	3.15	5.0
	Min-Max	kW	1.3 - 3.0	1.4 - 3.5	1.3 - 5.0
	Total Input	Rated	kW	0.730	1.040
	Design load	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Declared Capacity	at reference design temperature	kW	1.9 (-10°C)	2.4 (-10°C)
	at bivalent temperature	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
Heating (Average Season) ⁽³⁾	at operation limit temperature	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)
	Back up heating capacity	kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)
	Annual electricity consumption ⁽²⁾	kWh/a	698	885	1267
	SCOP ⁽⁴⁾		3.8	3.8	4.2
	Energy efficiency class		A	A	A+
	Capacity				
Operating Current (Max)	Rated	kW	3.15	3.6	5.4
	Min-Max	kW	0.9 - 3.5	1.1 - 4.1	1.4 - 6.5
	Total Input	Rated	kW	0.870	0.995
	Operating Current (Max)	A	5.8	6.5	9.8
	Input	Rated	kW	0.020	0.024
	Operating Current (Max)	A	0.3	0.3	0.4
Indoor Unit	Dimensions	H*W*D	mm	290-799-232	290-799-232
	Weight	kg	9	9	9
	Air Volume (SLo-Lo-Mid-Hi-SHi ⁽⁵⁾ Dry/Wet)	Cooling	m³/min	3.8 - 5.5 - 7.3 - 9.5	3.8 - 5.7 - 7.8 - 10.9
	Heating	m³/min	3.5 - 5.5 - 7.5 - 10.0	3.5 - 5.5 - 7.5 - 10.3	6.1 - 8.3 - 11.1 - 14.3
	Sound Level (SPL)	Cooling	dB(A)	22 - 30 - 37 - 43	22 - 31 - 38 - 45
	Heating	dB(A)	23 - 30 - 37 - 43	23 - 30 - 37 - 44	27 - 34 - 41 - 47
Outdoor Unit	Sound Level (PWL)	Cooling	dB(A)	57	60
	Heating	dB(A)	57	60	60
	Dimensions	H*W*D	mm	538-699-249	538-699-249
	Weight	kg	24	25	36
	Air Volume	Cooling	m³/min	31.5	31.5
	Heating	m³/min	31.5	31.5	34.8
Ext. Piping	Sound Level (SPL)	Cooling	dB(A)	50	50
	Heating	dB(A)	50	50	51
	Sound Level (PWL)	Cooling	dB(A)	63	64
	Heating	dB(A)	63	64	65
	Operating Current (Max)	A	5.5	6.2	9.4
	Breaker Size	A	10	10	12
Guaranteed Operating Range (Outdoor)	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/12.7
	Max.Length	Out-In	m	20	20
	Max.Height	Out-In	m	12	12
	Cooling	°C	+15 ~ +46	+15 ~ +46	+15 ~ +46
	Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24
	Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHi: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 51-52 for heating (warmer season) specifications.

MFZ SERIES

High Capacity, Energy Savings and a Design in Harmony with Living Spaces
Raise the Value of Your Room to the Next Level.


MFZ-KT25/35/50/60VG

R32




Simple, Flat Design

Uneven surfaces have been smoothed to provide a simple design with linear beauty, harmonised with all types of interiors.

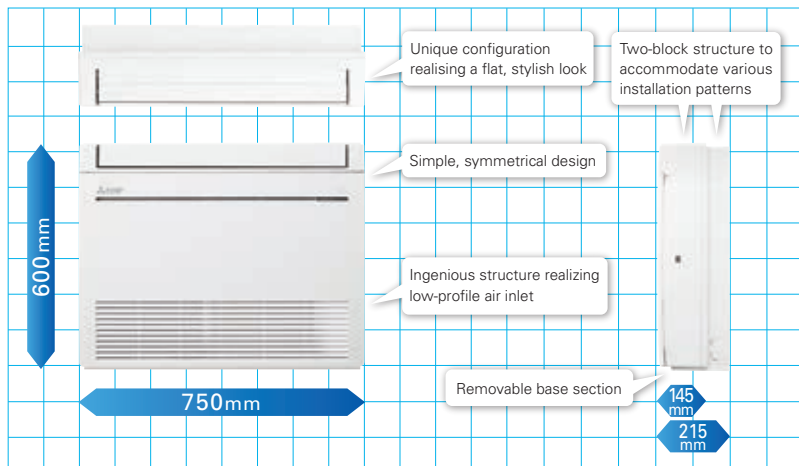

Images of installed unit

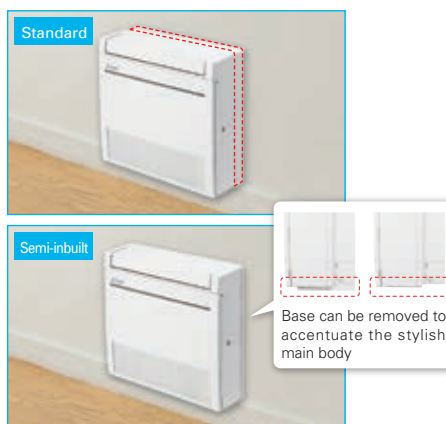


New Line-up

New models have been introduced to expand the line-up. The diverse selection enables the best solution for both customers and locations.

Capacity	2.5kW	3.5kW	5.0kW	6.0kW
MFZ-KJ	✓	✓	✓	
		↓		
MFZ-KT	✓	✓	✓	✓

Multi-flow Vane

Three uniquely shaped vanes control the airflow and allow the freedom to customize comfort according to preferences.

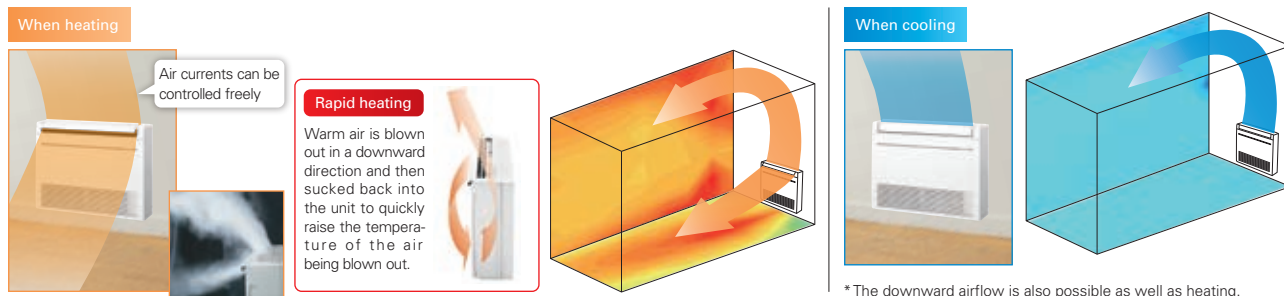


Weekly Timer (Introduced in response to market demand)

Temperature settings and On/Off control can be managed over a period of one week using the Weekly Timer. Up to eight setting patterns per calendar day are possible.

Quiet Operation

The indoor unit noise level is as low as 19dB for MFZ Series, offering a peaceful inside environment.

* Single connection only.

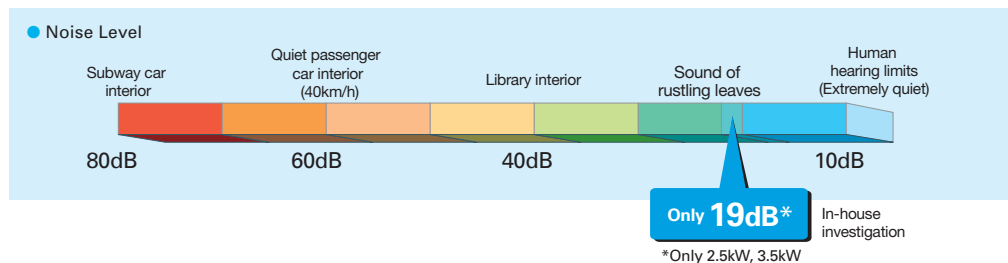

MFZ-KT SERIES



Indoor Unit

R32



MFZ-KT25/35/50/60VG

Outdoor Unit

R32



SUZ-M25/35VA



SUZ-M50VA



SUZ-M60VA

Remote Controller



Enclosed in MFZ-KT



*optional



*optional



*optional



Type			Inverter Heat Pump			
Indoor Unit			MFZ-KT25VG	MFZ-KT35VG	MFZ-KT50VG	MFZ-KT60VG
Outdoor Unit			SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA
Refrigerant			R32 ^(*)	R32 ^(*)	R32 ^(*)	R32 ^(*)
Power Supply			Outdoor power supply 230 / Single / 50			
Cooling	Design load	kW	2.5	3.5	5.0	6.1
	Annual electricity consumption ⁽²⁾	kWh/a	134	185	257	343
	SEER ⁽⁴⁾		6.5	6.6	6.8	6.2
	Capacity	Energy efficiency class		A ⁺⁺	A ⁺⁺	A ⁺⁺
		Rated	kW	2.5	3.5	6.1
Heating (Average Season)	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.5 (-10°C)
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	4.1 (-7°C)
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.5 (-10°C)
	Back up heating capacity	kW	0.2	0.3	0.8	0.5
	Annual electricity consumption ⁽²⁾	kWh/a	732	825	1423	1568
Operating Current (Max)	Input	Rated	kW	0.020 / 0.024	0.037 / 0.052	0.063 / 0.059
	Operating Current(Max)	A	0.20	0.20	0.45	0.55
	Dimensions	H*W*D	mm	600-750-215	600-750-215	600-750-215
	Weight	kg	14.5	14.5	14.5	15.0
	Air Volume (SLo-Lo-Mid-Hi-SHi ^(*))	Cooling	m ³ /min	3.9 - 4.8 - 6.5 - 7.8 - 8.9	3.9 - 4.8 - 6.5 - 7.8 - 8.9	5.6 - 6.7 - 8.6 - 10.4 - 12.3
Indoor Unit	Sound Level (SPL)	Heating	m ³ /min	3.5 - 4.0 - 5.6 - 7.3 - 9.7	3.5 - 4.0 - 5.6 - 7.3 - 9.7	6.0 - 7.7 - 9.4 - 11.6 - 14.0
		Cooling	dB(A)	19 - 24 - 31 - 37 - 41	19 - 24 - 31 - 37 - 41	28 - 32 - 37 - 42 - 48
	Sound Level (PWL)	Heating	dB(A)	19 - 23 - 30 - 37 - 44	19 - 23 - 30 - 37 - 44	29 - 35 - 40 - 44 - 49
		Cooling	dB(A)	54	54	60
	Dimensions	H*W*D	mm	550-800-285	550-800-285	714-800-285
Outdoor Unit	Weight	kg	30	35	41	54
	Air Volume	Cooling	m ³ /min	36.3	34.3	45.8
		Heating	m ³ /min	34.6	32.7	43.7
	Sound Level (SPL)	Cooling	dB(A)	45	48	48
		Heating	dB(A)	46	48	49
Ext. Piping	Sound Level (PWL)	Cooling	dB(A)	59	59	64
		Heating	dB(A)	59	59	65
	Operating Current(Max)	A	7	9	14	15
	Breaker Size	A	10	10	16	16
	Diameter	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7
Guaranteed Operating Range	Max.Length	Out-In	m	20	20	30
	Max.Height	Out-In	m	12	12	30
	Guaranteed Operating Range	Cooling	°C	-10 ~ +46	-10 ~ +46	-15 ~ +46
[Outdoor]			Heating	°C	-10 ~ +24	-10 ~ +24

(*) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHi: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No 626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

MLZ SERIES

Introducing a new type of ceiling cassette for the Multi-Split Series with streamlined interior dimensions and a sharp, sleek appearance.

R32
R410A
Multi

MLZ-KP25/35/50VF



GOOD
DESIGN




reddot award 2018
winner




Slim Design

Industry leading slim body realized a simple design with linear beauty.

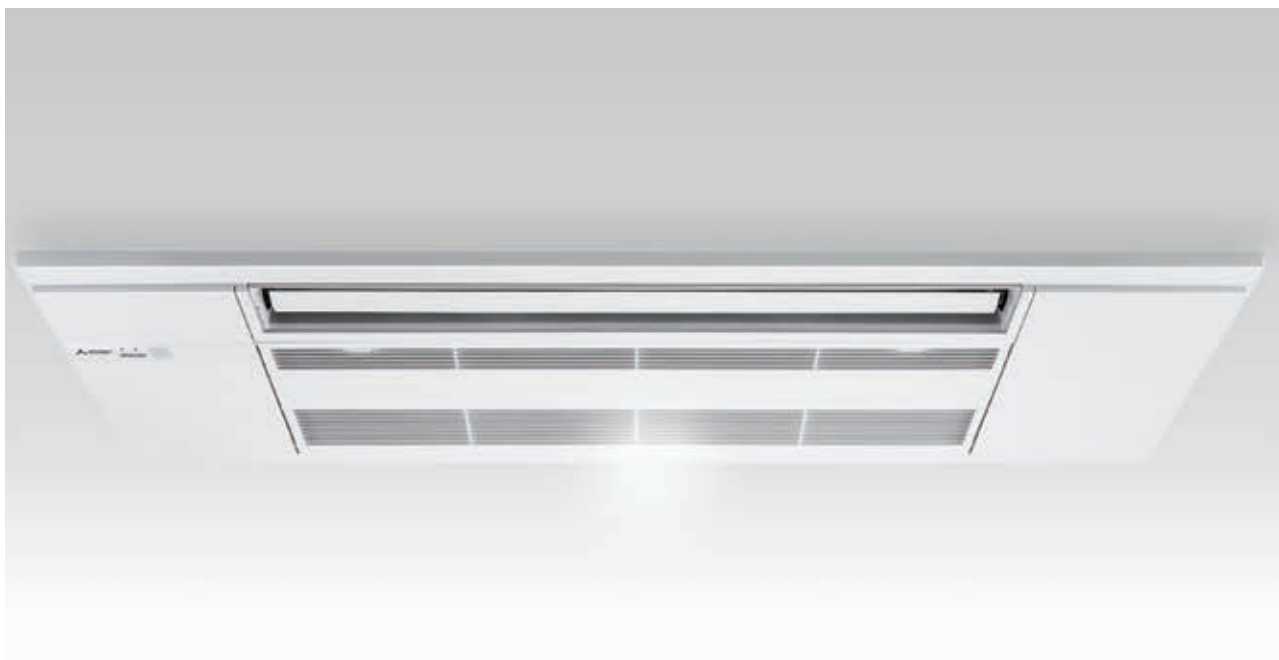

Ceiling Mounted

Installing the ceiling-mounted MLZ Series unit in a room creates a more spacious feel that enhances room comfort. This overhead format is also an excellent solution when lighting equipment is installed at the centre of the room and fixtures such as book shelves are mounted on wall surfaces.



Slim Body

The new units are designed with a slim body (only 185mm high), ensuring easy installation even when low ceiling cavities limit installation space. The need for ceiling cavity service space is also eliminated, further reducing the dimensions required for installation.




Set Airflow According to Ceiling Height

Dual-level airflow selection is engineered to accommodate specific ceiling heights. This is a key feature for adjusting airflow effectively when it is either too strong or too weak due to being mismatched with the height of the ceiling.

	25	35	50
Standard	2.4m	2.4m	2.4m
High ceiling	2.7m	2.7m	2.7m

Auto Vane Control

Outlet vanes can be moved left and right, and up and down using the remote controller. This improved airflow control feature solves the problem of drafts.

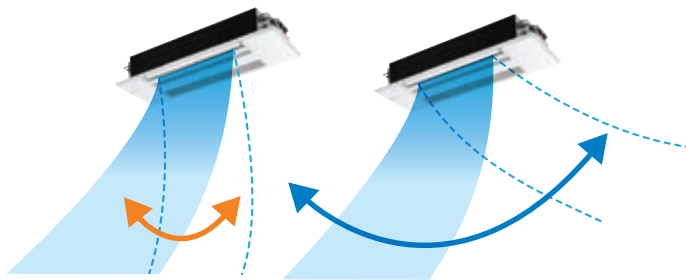

Up and Down


Left and Right

*Only available when Econo Cool is set.

Horizontal Airflow

The new airflow control completely eliminates that uncomfortable drafty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Horizontal Airflow]
Model name: MLZ-KP35VF
Ceiling height: 2.4m
Model: Cooling

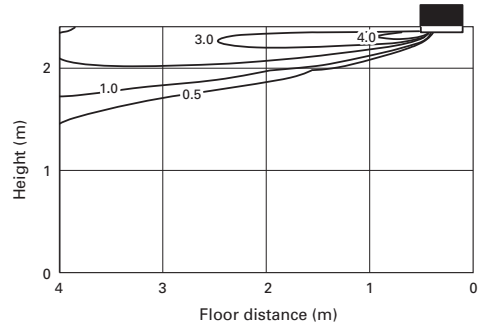

Built-in Weekly Timer Function

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
6:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
8:00	Automatically changes to high-power operation at wake-up time						
10:00	OFF	OFF	OFF	OFF	OFF	ON 18°C	ON 18°C
12:00	Automatically turned off during work hours					Midday is warmer, so the temperature is set lower	
14:00							
16:00							
18:00	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C
20:00	Automatically turns on, synchronized with arrival at home					Automatically raises temperature setting to match time when outside-air temperature is low	
22:00							
(during sleeping hours)	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 10°C	ON 10°C
	Automatically lowers temperature at bedtime for energy-saving operation at night						

Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting *The operation mode cannot be set.


Easy set-up using dedicated buttons



The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.



How to set the Weekly Timer

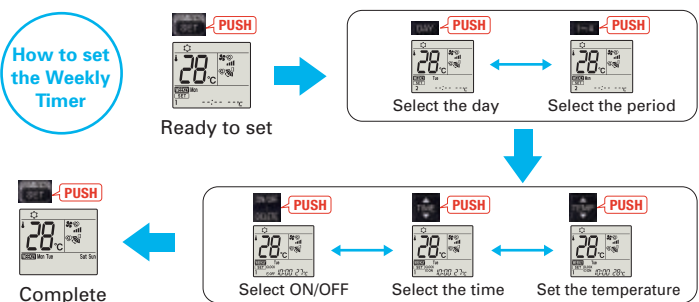


- Start by pushing the "SET" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit).
- It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

Easy Installation


Industry leading Slim Body

Innovative size which enables to fold the refrigerant piping above the unit.

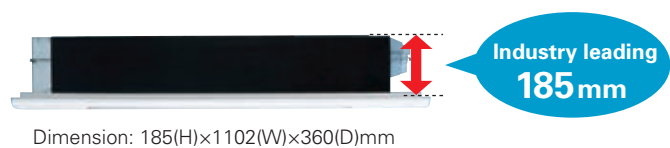


Temporary hanging hook

Work efficiency has improved during installation.

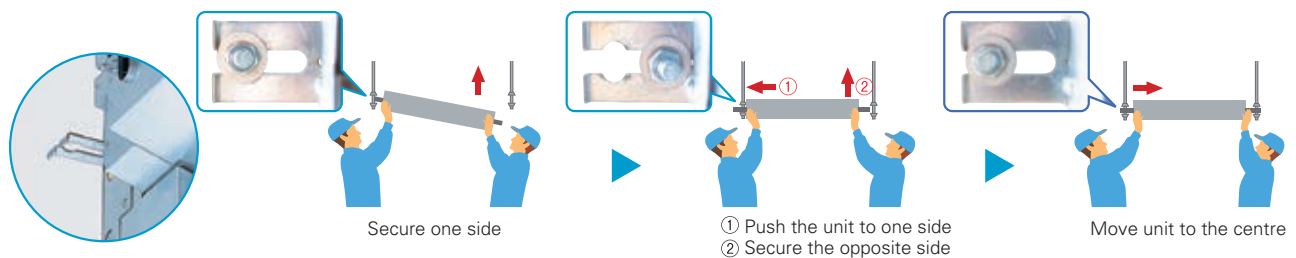


Drain Piping Supporters + Drain Cover

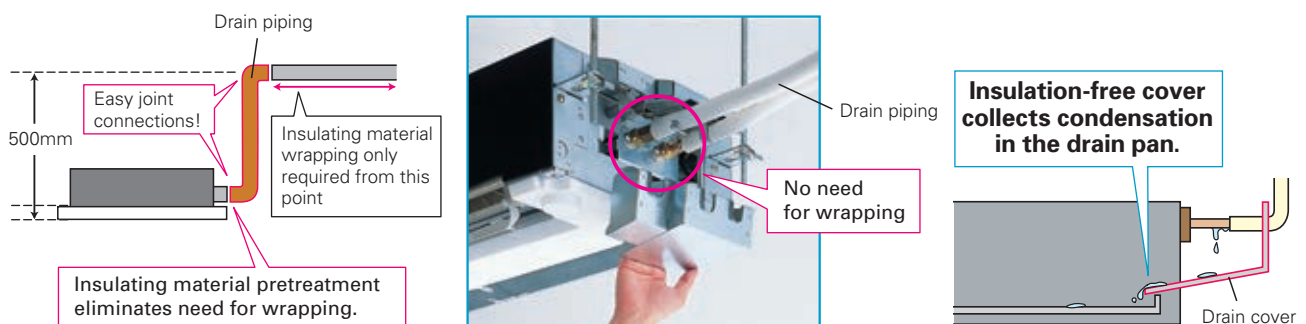

Wi-Fi Interface Installation (Optional)

The indoor unit panel is equipped with a Wi-Fi Interface pocket, contributing to the beautiful appearance, easy installation, and maintenance.

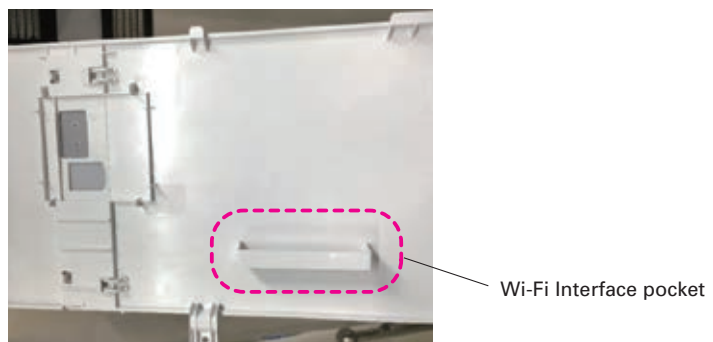

MLZ-KP SERIES



Indoor Unit



MLZ-KP25/35/50VF



Panel

MLP-444W

Outdoor Unit



SUZ-M25/35VA



SUZ-M50VA

Remote Controller



Enclosed in MLZ-KP



*optional



*optional



*optional



Type	Inverter Heat Pump			
Indoor Unit	MLZ-KP25VF		MLZ-KP35VF	MLZ-KP50VF
Outdoor Unit	SUZ-M25VA		SUZ-M35VA	SUZ-M50VA
Refrigerant	R32 ^(*)			
Power Supply	Outdoor Power supply			
	230V / Single / 50Hz			
Cooling	Design load	kW	2.5	5.0
	Annual electricity consumption ^(*)	kWh/a	141	260
	SEER ^(*)		6.2	6.7
	Energy efficiency class		A++	A++
	Capacity			
Heating	Rated	kW	2.5	5.0
	Min-Max	kW	1.4 - 3.2	1.7 - 5.6
	Total Input	kW	0.59	1.38
	Design load	kW	2.2	4.3
	Declared Capacity			
Operating Current (Max)	at reference design temperature	kW	2.0 (-10°C)	3.8 (-10°C)
	at bivalent temperature	kW	2.0 (-7°C)	3.8 (-7°C)
	at operation limit temperature	kW	2.0 (-10°C)	3.8 (-10°C)
	Back up heating capacity	kW	0.2	0.5
	Annual electricity consumption ^(*)	kWh/a	697	1397
Indoor Unit	SCOP ^(*)		4.4	4.3
	Energy efficiency class		A+	A+
	Capacity			
	Rated	kW	3.2	6.0
	Min-Max	kW	1.4 - 4.2	1.7 - 7.2
Panel	Total Input	kW	0.80	1.86
	Input	A	7.2	13.9
	Operating Current(Max)	A	0.04	0.04
	Dimensions	H*W*D	185-1102-360	185-1102-360
	Weight	kg	15.5	15.5
Outdoor Unit	Air Volume (SLo-Lo-Mid-Hi ^(*)) (Dry/Wet)	m ³ /min	6.0-7.2-8.0-8.8	6.0-8.3-9.8-11.4
	Sound Level (SPL) (SLo-Lo-Mid-Hi ^(*))	dB(A)	27-31-34-38	29-36-41-47
	Sound Level (PWL)	dB(A)	26-27-34-37	26-37-42-48
	Operating Current (Max)	A	6.8	13.5
	Breaker Size	A	10	20
Ext. Piping	Diameter	Liquid/Gas	6.35/9.52	6.35/12.7
	Max.Length	Out-In	20	30
	Max.Height	Out-In	12	30
	Guaranteed Operating Range (Outdoor)	Cooling	-10~+46	-15~+46
		Heating	-10~+24	-10~+24

(*)1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(*)2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*)3 SH: Super High

(*)4 SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

Specification on Warmer/Colder Condition

Type			Inverter Heat Pump							
Indoor Unit			MSZ-LN25VG2		MSZ-LN35VG2		MSZ-LN50VG2		MSZ-LN60VG2	
Outdoor Unit			MUZ-LN25VG2	MUZ-LN25VGHZ2	MUZ-LN35VG2	MUZ-LN35VGHZ2	MUZ-LN50VG2	MUZ-LN50VGHZ	MUZ-LN60VG	
Refrigerant			R32 ^(*)							
Cooling	Design load	kW	2.5	2.5	3.5	3.5	5	5.0	6.1	
	Annual electricity consumption ^(*)	kWh/a	83	83	129	130	205	230	285	
	SEER		10.5	10.5	9.5	9.4	8.5	7.6	7.5	
		Energy efficiency class	A+++	A+++	A+++	A+++	A+++	A++	A++	
Heating (Warmer Season)	Design load	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)	3.3 (2°C)	
	Declared Capacity	at reference design temperature	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)	
		at bivalent temperature	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)	
		at operation limit temperature	kW	2.5 (-15°C)	2.3 (-25°C)	3.2 (-15°C)	3.1 (-25°C)	4.2 (-15°C)	6.0 (-15°C)	
	Back up heating capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	
	Annual electricity consumption ^(*)	kWh/a	369	382	431	467	602	779	779	
	SCOP		6.4	6.6	6.5	6.5	5.8	5.9	5.9	
		Energy efficiency class	A+++	A+++	A+++	A+++	A+++	A+++	A+++	
Heating (Colder Season)	Design load	kW	—	4.7 (-22°C)	—	5.9 (-22°C)	—	8.8 (-22°C)	—	
	Declared Capacity	at reference design temperature	kW	—	2.6 (-22°C)	—	3.4 (-22°C)	—	5.1 (-22°C)	—
		at bivalent temperature	kW	—	3.2 (-10°C)	—	4.0 (-10°C)	—	6.0 (-10°C)	—
		at operation limit temperature	kW	—	2.3 (-25°C)	—	3.1 (-25°C)	—	4.7 (-25°C)	—
	Back up heating capacity	kW	—	2.1 (-22°C)	—	2.5 (-22°C)	—	3.7 (-22°C)	—	
	Annual electricity consumption ^(*)	kWh/a	—	2425	—	3075	—	5340	—	
	SCOP		—	4.0	—	4.0	—	3.4	—	
	Energy efficiency class	—	A+	—	A+	—	A	—		

Type			Inverter Heat Pump											
Indoor Unit			MSZ-AP20VG	MSZ-AP25VG		MSZ-AP35VG		MSZ-AP42VG		MSZ-AP50VG		MSZ-AP60VG(K)	MSZ-AP71VG(K)	
Outdoor Unit			MUZ-AP20VG	MUZ-AP25VG	MUZ-AP25VGH	MUZ-AP35VG	MUZ-AP35VGH	MUZ-AP42VG	MUZ-AP42VGH	MUZ-AP50VG	MUZ-AP50VGH	MUZ-AP60VG	MUZ-AP71VG	
Refrigerant			R32 ^(*)											
Cooling	Design load		kW	2.0	2.5	2.5	3.5	3.5	4.2	4.2	5.0	5.0	6.1	7.1
	Annual electricity consumption ^(*)		kWh/a	81	116	116	171	171	196	196	246	246	288	345
	SEER			8.6	7.6	7.6	7.2	7.2	7.5	7.5	7.2	7.2	7.4	7.2
	Energy efficiency class			A+++	A++	A++	A++	A++	A++	A++	A++	A++	A++	A++
Heating (Warmer Season)	Design load		kW	1.3 (2°C)	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)	2.5 (2°C)	3.7 (2°C)
	Declared Capacity	at reference design temperature	kW	1.3 (2°C)	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)	2.5 (2°C)	3.7 (2°C)
		at bi-variant temperature	kW	1.3 (2°C)	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)	2.5 (2°C)	3.7 (2°C)
		at operation limit temperature	kW	2.2 (-15°C)	2.0 (-15°C)	1.6 (-20°C)	2.2 (-15°C)	1.6 (-20°C)	3.4 (-15°C)	2.2 (-20°C)	3.4 (-15°C)	2.3 (-20°C)	3.7 (-15°C)	5.4 (-15°C)
	Back up heating capacity		kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ^(*)		kWh/a	350	337	337	923 / 418	417	507	507	563	563	627	891
	SCOP			5.2	5.4	5.4	5.4	5.4	5.8	5.8	5.7	5.7	5.5	5.8
	Energy efficiency class			A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++

Type			Inverter Heat Pump					
Indoor Unit			MSZ-FH25VE2		MSZ-FH35VE2		MSZ-FH50VE2	
Outdoor Unit			MUZ-FH25VE	MUZ-FH25VEHZ	MUZ-FH35VE	MUZ-FH35VEHZ	MUZ-FH50VE	MUZ-FH50VEHZ
Refrigerant			R410A ^(*)					
Cooling	Design load	kW	2.5	2.5	3.5	3.5	5.0	5.0
	Annual electricity consumption ^(*)	kWh/a	96	96	138	138	244	244
	SEER		9.1	9.1	8.9	8.9	7.2	7.2
			Energy efficiency class		A+++	A+++	A++	A++
Heating (Warmer Season)	Design load	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)	3.3 (2°C)
	Declared Capacity	at reference design temperature	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)
		at bi-variant temperature	kW	1.7 (2°C)	1.8 (2°C)	2.0 (2°C)	2.2 (2°C)	2.5 (2°C)
		at operation limit temperature	kW	2.5 (-15°C)	1.7 (-25°C)	3.2 (-15°C)	2.6 (-25°C)	5.2 (-15°C)
	Back up heating capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ^(*)	kWh/a	376	397	429	471	614	787
	SCOP		6.3	6.3	6.5	4.8 / 6.5	5.7	5.9
			Energy efficiency class		A+++	A+++	A+++	A+++

Type			Inverter Heat Pump						
Indoor Unit			MSZ-EF25VG		MSZ-EF35VG		MSZ-EF42VG	MSZ-EF50VG	
Outdoor Unit			MUZ-EF25VG	MUZ-EF25VGH	MUZ-EF35VG	MUZ-EF35VGH	MUZ-EF42VG	MUZ-EF50VG	
Refrigerant			R32 ^(*)						
Cooling	Design load		kW	2.5	2.5	3.5	3.5	4.2	5.0
	Annual electricity consumption ^(*)		kWh/a	96	96	139	139	186	233
	SEER			9.1	9.1	8.8	8.8	7.9	7.5
	Energy efficiency class			A+++	A+++	A+++	A+++	A++	A++
Heating (Warmer Season)	Design load		kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.3 (2°C)
	Declared Capacity	at reference design temperature	kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.3 (2°C)
		at bi-variant temperature	kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.3 (2°C)
		at operation limit temperature	kW	2.0 (-15°C)	2.0 (-15°C)	2.4 (-15°C)	2.4 (-15°C)	3.4 (-15°C)	3.5 (-15°C)
	Back up heating capacity		kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ^(*)		kWh/a	311	311	398	398	489	595
	SCOP			5.9	5.9	5.6	5.6	6.0	5.4
Energy efficiency class			A+++	A+++	A+++	A+++	A+++	A+++	

Type			Inverter Heat Pump								
Indoor Unit			MSZ-SF25VE3		MSZ-SF35VE3		MSZ-SF42VE3		MSZ-SF50VE3		
Outdoor Unit			MUZ-SF25VE	MUZ-SF25VEH	MUZ-SF35VE	MUZ-SF35VEH	MUZ-SF42VE	MUZ-SF42VEH	MUZ-SF50VE	MUZ-SF50VEH	
Refrigerant			R410A ⁽¹⁾								
Cooling	Design load		kW	2.5	2.5	3.5	3.5	4.2	4.2	5.0	5.0
	Annual electricity consumption ⁽²⁾		kWh/a	116	116	171	171	196	196	246	246
	SEER			7.6	7.6	7.2	7.2	7.5	7.5	7.2	7.2
	Energy efficiency class			A++	A++	A++	A++	A++	A++	A++	A++
Heating (Warmer Season)	Design load		kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)
	Declared Capacity	at reference design temperature	kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)
		at bi-variant temperature	kW	1.3 (2°C)	1.3 (2°C)	1.6 (2°C)	1.6 (2°C)	2.1 (2°C)	2.1 (2°C)	2.3 (2°C)	2.3 (2°C)
		at operation limit temperature	kW	2.0 (-15°C)	1.6 (-20°C)	2.2 (-15°C)	1.6 (-20°C)	3.4 (-15°C)	2.2 (-20°C)	3.4 (-15°C)	2.3 (-20°C)
	Back up heating capacity		kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ⁽²⁾		kWh/a	337	337	923 / 418	417	507	507	563	563
	SCOP			5.4	5.4	5.4	5.4	5.8	5.8	5.7	5.7
	Energy efficiency class			A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++

Type			Inverter Heat Pump			
Indoor Unit			MSZ-BT20VG	MSZ-BT25VG	MSZ-BT35VG	MSZ-BT50VG
Outdoor Unit			MUZ-BT20VG	MUZ-BT25VG	MUZ-BT35VG	MUZ-BT50VG
Refrigerant			R32 ^(*)			
Cooling	Design load	kW	2.0	2.5	3.5	5.0
	Annual electricity consumption ⁽²⁾	kWh/a	86	108	180	265
	SEER		8.1	8.1	6.8	6.6
			Energy efficiency class			
			A++			
Heating (Warmer Season)	Design load	kW	0.9 (2°C)	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)
	Declared Capacity	At reference design temperature	kW	0.9 (2°C)	1.1 (2°C)	1.3 (2°C)
		at bivalent temperature	kW	0.9 (2°C)	1.1 (2°C)	1.3 (2°C)
		at operation limit temperature	kW	1.3 (-15°C)	1.7 (-15°C)	2.1 (-15°C)
	Back up heating capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ⁽²⁾	kWh/a	234	268	304	543
	SCOP ^(*)		5.3	5.7	5.9	5.4
			Energy efficiency class			
			A+++			

Type			Inverter Heat Pump			
Indoor Unit			MSZ-GF60VE2	MSZ-GF71VE2	MSZ-WN25VA	MSZ-WN35VA
Outdoor Unit			MUZ-GF60VE	MUZ-GF71VE	MUZ-WN25VA	MUZ-WN35VA
Refrigerant			R410A ^(*)			
Cooling	Design load	kW	6.1	7.1	2.5	3.1
	Annual electricity consumption ⁽²⁾	kWh/a	311	364	141	173
	SEER		6.8	6.8	6.2	6.2
			Energy efficiency class			
			A++			
Heating (Warmer Season)	Design load	kW	2.5 (2°C)	3.7 (2°C)	1.1 (2°C)	1.3 (2°C)
	Declared Capacity	At reference design temperature	kW	2.5 (2°C)	3.7 (2°C)	1.1 (2°C)
		at bivalent temperature	kW	2.5 (2°C)	3.7 (2°C)	1.1 (2°C)
		at operation limit temperature	kW	3.7 (-15°C)	5.4 (-15°C)	1.6 (-15°C)
	Back up heating capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ⁽²⁾	kWh/a	664	963	304	362
	SCOP ^(*)		5.3	5.4	5.0	5.0
			Energy efficiency class			
			A+++			

Type			Inverter Heat Pump						
Indoor Unit			MSZ-HJ25VA	MSZ-HJ35VA	MSZ-HJ50VA	MSZ-HJ60VA	MSZ-HJ71VA	MSZ-DM25VA	MSZ-DM35VA
Outdoor Unit			MUZ-HJ25VA	MUZ-HJ35VA	MUZ-HJ50VA	MUZ-HJ60VA	MUZ-HJ71VA	MUZ-DM25VA	MUZ-DM35VA
Refrigerant			R410A ^(*)						
Cooling	Design load	kW	2.5	3.1	5.0	6.1	7.1	2.5	3.1
	Annual electricity consumption ⁽²⁾	kWh/a	171	212	292	354	441	149	190
	SEER		5.1	5.1	6.0	6.0	5.6	5.8	5.7
			Energy efficiency class						
			A						
Heating (Warmer Season)	Design load	kW	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)	2.5 (2°C)	2.9 (2°C)	1.1 (2°C)	1.3 (2°C)
	Declared Capacity	at reference design temperature	kW	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)	2.5 (2°C)	2.9 (2°C)	1.1 (2°C)
		at bivalent temperature	kW	1.1 (2°C)	1.3 (2°C)	2.1 (2°C)	2.5 (2°C)	2.9 (2°C)	1.1 (2°C)
		at operation limit temperature	kW	1.9 (-10°C)	2.4 (-10°C)	3.8 (-10°C)	4.6 (-10°C)	5.4 (-10°C)	2.4 (-10°C)
	Back up heating capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ⁽²⁾	kWh/a	356	426	539	674	813	325	386
	SCOP ^(*)		4.3	4.3	5.5	5.1	4.9	4.7	4.7
			Energy efficiency class						
			A+						

Type			Inverter Heat Pump					
Indoor Unit			MSZ-HR25VF	MSZ-HR35VF	MSZ-HR42VF	MSZ-HR50VF	MSZ-HR60VF	MSZ-HR71VF
Outdoor Unit			MUZ-HR25VF	MUZ-HR35VF	MUZ-HR42VF	MUZ-HR50VF	MUZ-HR60VF	MUZ-HR71VF
Refrigerant			R32 ^(*)					
Cooling	Design load	kW	2.5	3.4	4.2	5.0	6.1	7.1
	Annual electricity consumption ⁽²⁾	kWh/a	141	191	226	269	296	355
	SEER		6.2	6.2	6.5	6.5	7.2	7.0
			Energy efficiency class					
			A++					
Heating (Warmer Season)	Design load	kW	1.1 (2°C)	1.3 (2°C)	1.6 (2°C)	2.1 (2°C)	2.5 (2°C)	3.0 (2°C)
	Declared Capacity	at reference design temperature	kW	1.1 (2°C)	1.3 (2°C)	1.6 (2°C)	2.1 (2°C)	2.5 (2°C)
		at bivalent temperature	kW	1.1 (2°C)	1.3 (2°C)	1.6 (2°C)	2.1 (2°C)	2.5 (2°C)
		at operation limit temperature	kW	1.9 (-10°C)	2.4 (-10°C)	2.9 (-10°C)	3.8 (-10°C)	4.6 (-10°C)
	Back up heating capacity	kW	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)	0.0 (2°C)
	Annual electricity consumption ⁽²⁾	kWh/a	289	344	427	558	640	802
	SCOP ^(*)		5.3	5.2	5.2	5.2	5.4	5.2
			Energy efficiency class					
			A+++					

(*) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

S

SERIES



SELECTION

Series line-up consists of two types of indoor units.
Choose the model that best matches room conditions.

SELECT INDOOR UNIT

Select the optimal unit and capacity required to match room construction and air conditioning requirements.



Units without Remote Controller
SLZ-M15FA (Multi split series connection only)
SLZ-M25FA
SLZ-M35FA
SLZ-M50FA
SLZ-M60FA

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller
SLP-2FA			
SLP-2FAL	✓		
SLP-2FAE		✓	
SLP-2FALE	✓	✓	
SLP-2FALM	✓		✓
SLP-2FALME	✓	✓	✓




Units without Remote Controller
SEZ-M25DA
SEZ-M35DA
SEZ-M50DA
SEZ-M60DA
SEZ-M71DA


Units with Wireless Remote Controller
SEZ-M25DAL
SEZ-M35DAL
SEZ-M50DAL
SEZ-M60DAL
SEZ-M71DAL

SELECT OUTDOOR UNIT


There is one outdoor unit for respective indoor units.




SUZ-M25/35VA




SUZ-M50VA



SUZ-M60/71VA



SUZ-KA25/35VA6



SUZ-KA50/60/71VA6

* To confirm compatibility with the MXZ Series multi-type system, refer to the MXZ Series page.

SLZ SERIES

Compact, lightweight ceiling cassette units with 4-way air outlets provide maximum comfort by evenly distributing airflow throughout the entire room.

R32
R410A

SLZ-M15/25/35/50/60FA




New lineup

1.5kW has been introduced for multi connection. The diverse selection enables the best solution for both customer and location.

Capacity	15	25	35	50	60
SLZ-KF		✓	✓	✓	✓
SLZ-M	✓	✓	✓	✓	✓


Beautiful design

The straight-line form introduced has resulted in a beautiful square design. Its high affinity ensures the ability to blend in seamlessly with any interior. The indoor unit is an ideal match for office or store use. Of course, design matched 2x2 (600mm*600mm) ceiling construction specifications.

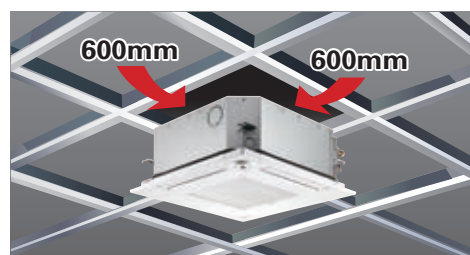

The height above ceiling of 245mm

The height above ceiling of 245mm enables fitting into narrow ceiling space. Installation is simple, even when the ceiling spaces are narrow to make the ceilings higher. Of course, in addition to our products, replacing competitors' product is simplified too.

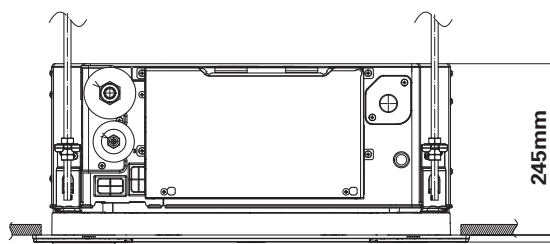


Energy-saving Performance*


The energy-saving performance achieved A⁺⁺ in SEER and A⁺ in SCOP.

*In case of connecting with SUZ-KA-VA6

[SEER]

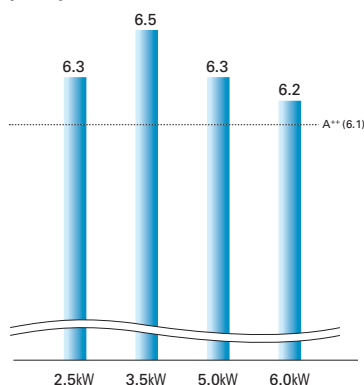

[SCOP]

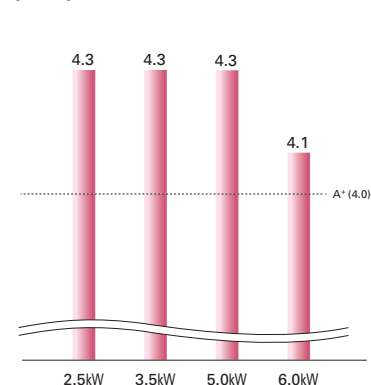

Quietness


Low sound level has been realized by introduction of 3D turbo fan. New SLZ can give users quieter and more comfortable room condition.



Horizontal Airflow

The new airflow control completely eliminates that uncomfortable drafty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Airflow distribution]*
SLZ-M60FA
Flow angle, cooling at 20°C (ceiling height 2.7m)

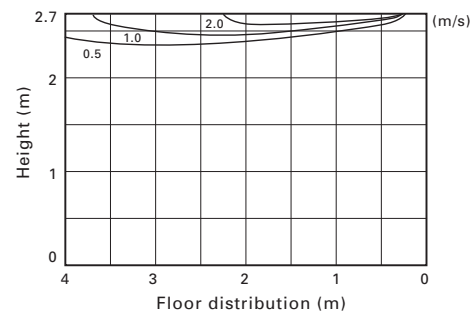

*Vane angle: Horizontal

Easy installation

Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during temporary panel installation.



No need to remove screws

Installation is possible without removing the screws for control box simply loosen them. This eliminates the risk of losing screws.

■ Corner panel




■ Control box cover



Drain lift

As the result of using a larger drain pan, the maximum drain lifting height has been up to 850mm, greatly enhancing construction flexibility compared to the existing model.

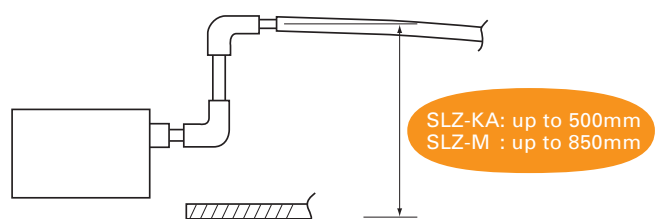

Detects number of people

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.


No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

* When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

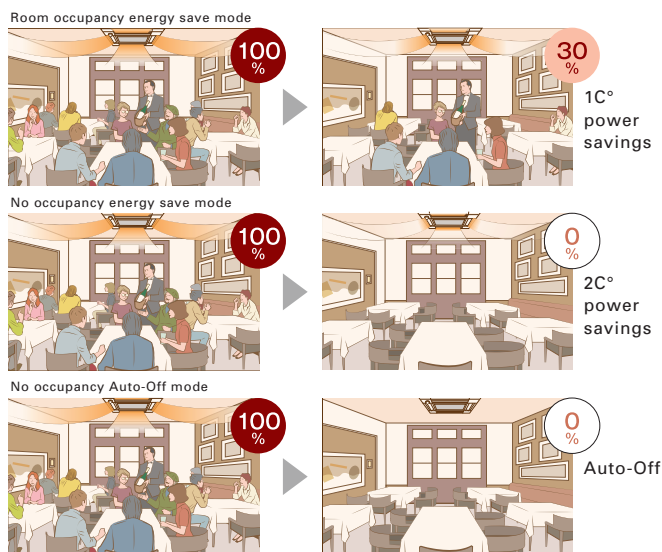


*PAR-40MAA is required for each setting

Detects people's position

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.

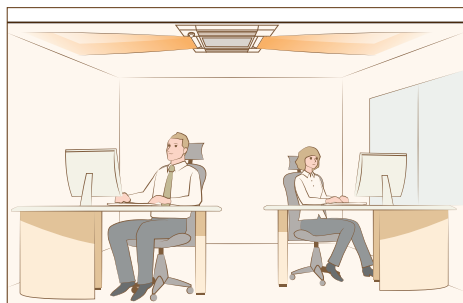

*PAR-40MAA or PAR-SL100A-E is required for each setting.


Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

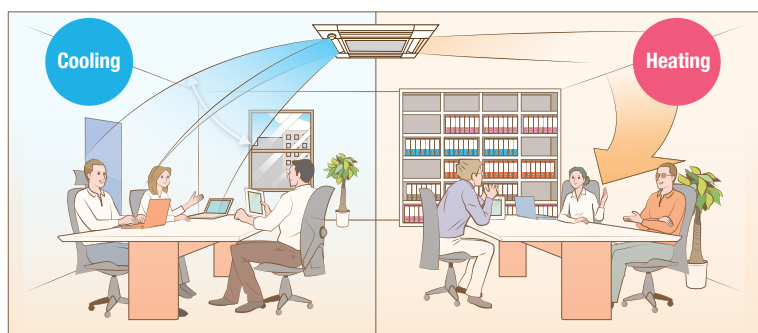

*PAR-40MAA is required for each setting.

Simultaneous Multi-system*

Multiple indoor units can be installed to match the room layout, ensuring comfort and coverage of the entire room. Connection of multiple cassettes to P Series power inverter outdoor units shown below is possible.

* Only for RA410A connection

Power Inverter Combination		SLZ-M35FA	SLZ-M50FA	SLZ-M60FA
PUZ-ZM71VHA PUHZ-ZRP71VHA2	Distribution pipe	Twin	—	—
		MSDD-50TR2-E MSDD-50TR-E		
PUZ-ZM100V(Y)KA PUHZ-ZRP100V(Y)KA3	Distribution pipe	Triple	Twin	—
		MSDT-111R3-E MSDT-111R-E	MSDD-50TR2-E MSDD-50TR-E	
PUZ-ZM125V(Y)KA PUHZ-ZRP125V(Y)KA3	Distribution pipe	Quadruple	Triple	Twin
		MSDF-111R2-E MSDF-111R-E	MSDT-111R3-E MSDT-111R-E	MSDD-50TR2-E2 MSDD-50TR-E
PUZ-ZM140V(Y)KA PUHZ-ZRP140V(Y)KA3	Distribution pipe	Quadruple	Triple	—
		MSDF-111R2-E MSDF-111R-E	MSDT-111R3-E MSDT-111R-E	—

SLZ-M SERIES



Indoor Unit



SLZ-M15/25/35/50/60FA

Outdoor Unit



SUZ-M25/35VA

SUZ-M50VA

SUZ-M60VA

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller
SLP-2FA			
SLP-2FAL	✓		
SLP-2FAE		✓	
SLP-2FALE	✓	✓	
SLP-2FALM	✓		✓
SLP-2FALME	✓	✓	✓

Remote Controller



Enclosed in SLP-2FALM/SLP-2FALME



Type				Inverter Heat Pump					
Indoor Unit				SLZ-M15FA	SLZ-M25FA	SLZ-M35FA	SLZ-M50FA	SLZ-M60FA	
Outdoor Unit				for Multi connection	SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	
Refrigerant				R32*1					
Power Supply	Source	Outdoor power supply							
	Outdoor (V/Phase/Hz)	230 / Single / 50							
Cooling	Capacity	Rated	kW	—	2.5	3.5	4.6	5.7	
		Min - Max	kW	—	1.4 - 3.2	0.7 - 3.9	1.0 - 5.2	1.5 - 6.3	
	Total Input	Rated	kW	—	0.65	1.09	1.35	1.67	
	Design Load		kW	—	2.5	3.5	4.6	5.7	
	Annual Electricity Consumption*2		kWh/a	—	139	183	253	321	
	SEER			—	6.3	6.7	6.3	6.2	
		Energy Efficiency Class		—	A++	A++	A++	A++	
Heating (Average Season)	Capacity	Rated	kW	—	3.2	4.0	5.0	6.4	
		Min - Max	kW	—	1.3 - 4.2	1.0 - 5.0	1.3 - 5.5	1.6 - 7.3	
	Total Input	Rated	kW	—	0.88	1.07	1.56	2.13	
	Design Load		kW	—	2.2	2.6	3.6	4.6	
	Declared Capacity	at reference design temperature	kW	—	2.0 (−10°C)	2.3 (−10°C)	3.2 (−10°C)	4.1 (−10°C)	
		at bivalent temperature	kW	—	2.0 (−7°C)	2.3 (−7°C)	3.2 (−7°C)	4.1 (−7°C)	
		at operation limit temperature	kW	—	2.0 (−10°C)	2.3 (−10°C)	3.2 (−10°C)	4.1 (−10°C)	
	Back Up Heating Capacity		kW	—	0.2	0.3	0.4	0.5	
	Annual Electricity Consumption*2		kWh/a	—	716	843	1191	1559	
	SCOP			—	4.3	4.3	4.2	4.1	
	Energy Efficiency Class		—	A+	A+	A+	A+		
Operating Current (max)			A	—	7.0	8.7	13.7	15.1	
Indoor Unit	Input	Rated	kW	0.02	0.02	0.02	0.03	0.04	
	Operating Current (max)		A	0.17	0.20	0.24	0.32	0.43	
	Dimensions <Panel>	H × W × D	mm	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	
	Weight <Panel>		kg	15 <3>	15 <3>	15 <3>	15 <3>	15 <3>	
	Air Volume [Lo-Mid-Hi]		m³/min	6.0 - 6.5 - 7.0	6.5 - 7.5 - 8.5	6.5 - 8.0 - 9.5	7.0 - 9.0 - 11.5	7.5 - 11.5 - 13.0	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	24 - 26 - 28	25 - 28 - 31	25 - 30 - 34	27 - 34 - 39	32 - 40 - 43	
	Sound Level (PWL)		dB(A)	45	48	51	56	60	
Outdoor Unit	Dimensions	H × W × D	mm	—	550 - 800 - 285	550 - 800 - 285	714 - 800 - 285	880 - 840 - 330	
	Weight		kg	—	30	35	41	54	
	Air Volume	Cooling	m³/min	—	36.3	34.3	45.8	50.1	
		Heating	m³/min	—	34.6	32.7	43.7	50.1	
	Sound Level (SPL)	Cooling	dB(A)	—	45	48	48	49	
		Heating	dB(A)	—	46	48	49	51	
	Sound Level (PWL)	Cooling	dB(A)	—	59	59	64	65	
	Operating Current (max)		A	—	6.8	8.5	13.5	14.8	
	Breaker Size		A	—	10	10	20	20	
	Ext. Piping	Diameter	Liquid / Gas	mm	—	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88
Max. Length		Out-In	m	—	20	20	30	30	
Max. Height		Out-In	m	—	12	12	30	30	
Guaranteed Operating Range [Outdoor]			Cooling	°C	—	−10~+46	−10~+46	−15~+46	−15~+46
			Heating	°C	—	−10~+24	−10~+24	−10~+24	−10~+24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

SLZ-M SERIES




Indoor Unit



SLZ-M15/25/35/50/60FA

Outdoor Unit

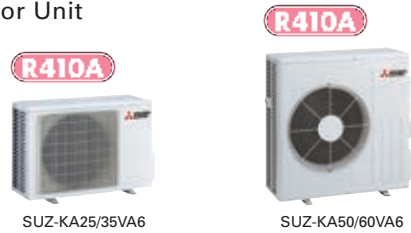

SUZ-KA25/35VA6

SUZ-KA50/60VA6

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller
SLP-2FA			
SLP-2FAL	✓		
SLP-2FAE		✓	
SLP-2FALE	✓	✓	
SLP-2FALM	✓		✓
SLP-2FALME	✓	✓	✓

Remote Controller



Type				Inverter Heat Pump				
Indoor Unit				SLZ-M15FA	SLZ-M25FA	SLZ-M35FA	SLZ-M50FA	SLZ-M60FA
Outdoor Unit				for Multi connection	SUZ-KA25VA6	SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6
Refrigerant				R410A*1				
Power Supply	Source				Outdoor power supply			
	Outdoor (V/Phase/Hz)				230 / Single / 50			
Cooling	Capacity	Rated	kW	—	2.6	3.5	4.6	5.6
		Min - Max	kW	—	1.5 - 3.2	1.4 - 3.9	2.3 - 5.2	2.3 - 6.5
	Total Input	Rated	kW	—	0.684	0.972	1.394	1.767
	Design Load		kW	—	2.6	3.5	4.6	5.6
	Annual Electricity Consumption*2		kWh/a	—	144	188	256	316
	SEER			—	6.3	6.5	6.3	6.2
		Energy Efficiency Class		—	A++	A++	A++	A++
Heating (Average Season)	Capacity	Rated	kW	—	3.2	4.0	5.0	6.4
		Min - Max	kW	—	1.3 - 4.2	1.7 - 5.0	1.7 - 6.0	2.5 - 7.4
	Total Input	Rated	kW	—	0.886	1.108	1.558	2.278
	Design Load		kW	—	2.2	2.6	3.6	4.6
	Declared Capacity	at reference design temperature	kW	—	2.0 (−10°C)	2.3 (−10°C)	3.2 (−10°C)	4.0 (−10°C)
		at bivalent temperature	kW	—	2.0 (−7°C)	2.3 (−7°C)	3.2 (−7°C)	4.0 (−7°C)
		at operation limit temperature	kW	—	2.0 (−10°C)	2.3 (−10°C)	3.2 (−10°C)	4.0 (−10°C)
	Back Up Heating Capacity		kW	—	0.2	0.3	0.4	0.4
	Annual Electricity Consumption*2		kWh/a	—	716	845	1172	1572
SCOP			—	4.3	4.3	4.3	4.1	
	Energy Efficiency Class		—	A+	A+	A+	A+	
Operating Current (max)			A	—	7.2	8.4	12.3	14.4
Indoor Unit	Input	Rated	kW	0.02	0.02	0.02	0.03	0.04
	Operating Current (max)		A	0.17	0.20	0.24	0.32	0.43
	Dimensions <Panel>	H × W × D	mm	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>	245-570-570 <10-625-625>
	Weight <Panel>		kg	15 <3>	15 <3>	15 <3>	15 <3>	15 <3>
	Air Volume [Lo-Mid-Hi]		m³/min	6.0 - 6.5 - 7.0	6.5 - 7.5 - 8.5	6.5 - 8.0 - 9.5	7.0 - 9.0 - 11.5	7.5 - 11.5 - 13.0
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	24 - 26 - 28	25 - 28 - 31	25 - 30 - 34	27 - 34 - 39	32 - 40 - 43
	Sound Level (PWL)		dB(A)	45	48	51	56	60
Outdoor Unit	Dimensions	H × W × D	mm	—	550 - 800 - 285	550 - 800 - 285	880 - 840 - 330	880 - 840 - 330
	Weight		kg	—	30	35	54	50
	Air Volume	Cooling	m³/min	—	32.6	36.3	44.6	40.9
		Heating	m³/min	—	34.7	34.8	44.6	49.2
	Sound Level (SPL)	Cooling	dB(A)	—	47	49	52	55
		Heating	dB(A)	—	48	50	52	55
	Sound Level (PWL)	Cooling	dB(A)	—	58	62	65	65
	Operating Current (max)		A	—	7.0	8.2	12.0	14.0
	Breaker Size		A	—	10	10	20	20
Ext. Piping	Diameter	Liquid / Gas	mm	—	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88
	Max. Length	Out-In	m	—	20	20	30	30
	Max. Height	Out-In	m	—	12	12	30	30
Guaranteed Operating Range [Outdoor]		Cooling	°C	—	−10 ~ +46	−10 ~ +46	−15 ~ +46	−15 ~ +46
		Heating	°C	—	−10 ~ +24	−10 ~ +24	−10 ~ +24	−10 ~ +24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

SEZ SERIES

R32
R410A


SEZ-M25-71DA(L)



This concealed ceiling-mounted indoor unit series is compact, and fits easily into rooms with lowered ceilings. Highly reliable energy-saving performance makes it a best match choice for concealed unit installations.

Compact Ceiling-concealed Units

Only the intake-air grille and outlet vents are visible when using this ceiling-concealed indoor unit. The rest of the unit is conveniently hidden in the ceiling cavity, essentially leaving the ceiling and walls free of bulky looking devices and maintaining a high-class interior décor. The compact units require minimal space and can be installed in buildings with lowered ceilings, where exposed units were the rule in the past.

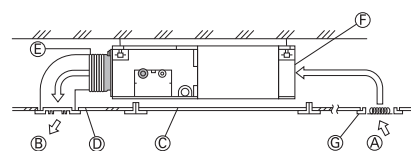

- Ⓐ Air inlet
- Ⓑ Air outlet
- Ⓒ Access door
- Ⓓ Ceiling surface
- Ⓔ Canvas duct
- Ⓕ Air filter
- Ⓖ Inlet grille

Selection of Fan Speeds and Static Pressure Levels

DC fan motor settings have been increased to accommodate more application needs. Three fan speed settings (Low, Medium and High) and four static pressure levels (5, 15, 35 and 50Pa) are now available.

SEZ-M25-71DA(L)

5/15/35/50 Pa

Four Levels Available for All Models

We've lowered the minimum static pressure level, resulting in less room noise when the optimum static pressure is selected.

.....

SPL (Low Fan Mode)	
SEZ-M	
External Static Pressure	15 Pa
35	23dB
50	30dB
60	30dB
71	30dB

Drain Pump (Optional)


The PAC-KE07DM-E drain pump is now available as an option.

With the pump, a drain hose length of up to 550mm can be used, adding to increased installation possibilities.

SEZ-M SERIES



Indoor Unit



SEZ-M25/35/50/60/71DA (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL (Wireless Remote Controller is enclosed)

Outdoor Unit



SUZ-M25/35VA



SUZ-M50VA



SUZ-M60/71VA

Remote Controller



Enclosed in
SEZ-M DAL



*optional
(for SEZ-M DA)



*optional
(for SEZ-M DA)



*optional
(for SEZ-M DA)



Type				Inverter Heat Pump					
Indoor Unit				SEZ-M25DA	SEZ-M35DA	SEZ-M50DA	SEZ-M60DA	SEZ-M71DA	
Outdoor Unit				SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	
Refrigerant				R32*1					
Power Supply	Source	Outdoor power supply							
	Outdoor (V/Phase/Hz)	230 / Single / 50							
Cooling	Capacity	Rated	kW	2.5	3.5	5.0	6.1	7.1	
		Min - Max	kW	1.4 - 3.2	0.7 - 3.9	1.1 - 5.6	1.6 - 6.3	2.2 - 8.1	
	Total Input	Rated	kW	0.71	1.00	1.54	1.84	2.15	
	Design Load		kW	2.5	3.5	5.0	6.1	7.1	
	Annual Electricity Consumption*2		kWh/a	165	207	290	386	452	
	SEER *3			5.3	5.9	6.0	5.5	5.5	
	Energy Efficiency Class			A	A+	A+	A	A	
Heating (Average Season)	Capacity	Rated	kW	2.9	4.2	6.0	7.4	8.0	
		Min - Max	kW	1.3 - 4.2	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	
	Total Input	Rated	kW	0.80	1.07	1.61	2.04	2.28	
	Design Load		kW	2.2	2.6	4.3	4.6	5.8	
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	
		at bivalent temperature	kW	2.0 (-7°C)	2.3 (-7°C)	3.8 (-7°C)	4.1 (-7°C)	5.2 (-7°C)	
		at operation limit temperature	kW	2.0 (-10°C)	2.3 (-10°C)	3.8 (-10°C)	4.1 (-10°C)	5.2 (-10°C)	
	Back Up Heating Capacity		kW	0.2	0.3	0.5	0.5	0.6	
	Annual Electricity Consumption*2		kWh/a	807	884	1499	1525	2072	
	SCOP*3			3.8	4.1	4.0	4.2	3.9	
Energy Efficiency Class			A	A+	A+	A+	A		
Operating Current (max)			A	7.2	9.0	14.2	15.5	15.7	
Indoor Unit	Input	Rated	kW	0.04	0.05	0.07	0.07	0.10	
	Operating Current (max)		A	0.40	0.50	0.70	0.70	0.90	
	Dimensions <Panel>	H x W x D	mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700	
	Weight <Panel>		kg	18	21	23	27	27	
	Air Volume [Lo-Mid-Hi]		m³/min	6 - 7 - 9	7 - 9 - 11	10 - 13 - 15	12 - 15 - 18	12 - 16 - 20	
	External Static Pressure		Pa	5 / 15 / 35 / 50	5 / 15 / 35 / 50	5 / 15 / 35 / 50	5 / 15 / 35 / 50	5 / 15 / 35 / 50	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	22 - 25 - 29	23 - 28 - 33	29 - 33 - 36	29 - 33 - 37	29 - 34 - 39	
	Sound Level (PWL)		dB(A)	50	53	57	58	60	
Outdoor Unit	Dimensions		H x W x D	mm	550 - 800 - 285	550 - 800 - 285	714 - 800 - 285	880 - 840 - 330	880 - 840 - 330
	Weight		kg	30	35	41	54	55	
	Air Volume	Cooling	m³/min	36.3	34.3	45.8	50.1	50.1	
		Heating	m³/min	34.6	32.7	43.7	50.1	50.1	
	Sound Level (SPL)	Cooling	dB(A)	45	48	48	49	49	
		Heating	dB(A)	46	48	49	51	51	
	Sound Level (PWL)		dB(A)	59	59	64	65	66	
	Operating Current (max)		A	6.8	8.5	13.5	14.8	14.8	
Breaker Size		A	10	10	20	20	20		
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	20	20	30	30	30	
	Max. Height	Out-In	m	12	12	30	30	30	
Guaranteed Operating Range [Outdoor]			Cooling	°C	-10 ~ +46	-10 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.


*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 SEER/SCOP are measured at ESP 35Pa.

SEZ-M SERIES



Indoor Unit



SEZ-M25/35/50/60/71DA (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL (Wireless Remote Controller is enclosed)

Outdoor Unit



SUZ-KA25/35VA6



SUZ-KA50/60/71VA6

Remote Controller



Enclosed in SEZ-M DAL



*optional
(for SEZ-M DA)



*optional
(for SEZ-M DA)



*optional
(for SEZ-M DA)



Type			Inverter Heat Pump				
Indoor Unit			SEZ-M25DA(L)	SEZ-M35DA(L)	SEZ-M50DA(L)	SEZ-M60DA(L)	SEZ-M71DA(L)
Outdoor Unit			SUZ-KA25VA6	SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6
Refrigerant			R410A* ¹				
Power Supply	Source		Outdoor power supply				
	Outdoor (V/Phase/Hz)		230 / Single / 50				
Cooling	Capacity	Rated	kW	2.5	3.5	5.1	7.1
		Min - Max	kW	1.5 - 3.2	1.4 - 3.9	2.3 - 5.6	2.8 - 8.3
	Total Input	Rated	kW	0.730	1.010	1.580	2.210
	Design Load		kW	2.5	3.5	5.1	7.1
	Annual Electricity Consumption* ²		kWh/a	162	210	300	458
	SEER* ³			5.3	5.7	5.8	5.3
	Energy Efficiency Class			A	A+	A+	A
Heating (Average Season)	Capacity	Rated	kW	2.9	4.2	6.4	8.1
		Min - Max	kW	1.3 - 4.5	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0
	Total Input	Rated	kW	0.803	1.130	1.800	2.268
	Design Load		kW	2.2	2.8	4.6	6.0
	Declared Capacity	at reference design temperature	kW	1.9 (-10°C)	2.5 (-10°C)	4.1 (-10°C)	4.5 (-10°C)
		at bivalent temperature	kW	1.9 (-7°C)	2.5 (-7°C)	4.1 (-7°C)	4.8 (-7°C)
		at operation limit temperature	kW	1.9 (-10°C)	2.5 (-10°C)	4.1 (-10°C)	4.5 (-10°C)
Back Up Heating Capacity			kW	0.3	0.3	0.5	1.0
	Annual Electricity Consumption* ²		kWh/a	808	979	1653	1878
	SCOP* ³			3.8	4.0	3.9	4.1
	Energy Efficiency Class			A	A+	A	A+
Operating Current (max)			A	7.4	8.7	12.7	14.7
Indoor Unit	Input	Rated	kW	0.040	0.050	0.070	0.100
	Operating Current (max)		A	0.4	0.5	0.7	0.9
	Dimensions <Panel>	H x W x D	mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700
	Weight <Panel>		kg	18	21	23	27
	Air Volume [Lo-Mid-Hi]		m ³ /min	6 - 7 - 9	7 - 9 - 11	10 - 13 - 15	12 - 15 - 18
	External Static Pressure		Pa	5 / 15 / 35 / 50	5 / 15 / 35 / 50	5 / 15 / 35 / 50	5 / 15 / 35 / 50
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	22 - 25 - 29	23 - 28 - 33	29 - 33 - 36	29 - 33 - 37
Outdoor Unit	Sound Level (PWL)		dB(A)	50	53	57	58
	Dimensions	H x W x D	mm	550 - 800 - 285	550 - 800 - 285	880 - 840 - 330	880 - 840 - 330
	Weight		kg	30	35	54	53
	Air Volume	Cooling	m ³ /min	32.6	36.3	44.6	50.1
		Heating	m ³ /min	34.7	34.8	44.6	48.2
	Sound Level (SPL)	Cooling	dB(A)	47	49	52	55
		Heating	dB(A)	48	50	52	55
Sound Level (PWL)		Cooling	dB(A)	58	62	65	69
	Operating Current (max)		A	7.0	8.0	12.0	14.0
	Breaker Size		A	10	10	20	20
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88
	Max. Length	Out-In	m	20	20	30	30
	Max. Height	Out-In	m	12	12	30	30
Guaranteed Operating Range [Outdoor]	Cooling		°C	-10 ~ +46	-10 ~ +46	-15 ~ +46	-15 ~ +46
	Heating		°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24

*¹ Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*² Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*³ SEER/SCOP are measured at ESP 35Pa.













P

SERIES














SELECTION

Line-up includes a selection of eight indoor units and four series of outdoor units.
Easily construct a system that best matches room air conditioning needs.

R32 INDOOR UNIT		R32 OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA		Power Inverter  PUZ-ZM35/50  PUZ-ZM60/71  PUZ-ZM100/125/140/ 200/250	Standard Inverter  SUZ-M35  SUZ-M50  SUZ-M60/71  PUZ-M100/125/140  PUZ-M200/250

* Some indoor units cannot be used with this unit.





R410A INDOOR UNIT		R410A OUTDOOR UNIT	
 4-way ceiling-cassette PLA-ZM EA PLA-M EA  Ceiling-concealed PEAD-M  Ceiling-suspended PCA-M  Professional Kitchen PCA-M HA		Power Inverter  PUHZ-ZRP35/50  PUHZ-ZRP60/71  PUHZ-ZRP100/125/140/ 200/250	Standard Inverter  SUZ-KA35  SUZ-KA50/60/71  PUHZ-P100/125/140  PUHZ-P200/250

To confirm compatibility with the MXZ Series, refer to the MXZ Series page.

* Some indoor units cannot be used with this unit.

SELECT COMBINATION

Choose the installation pattern for the indoor units. (In the case of a multi-system, distribution piping is necessary, so please select the necessary piping as well.)

Single System 	Simultaneous Multi-System Twin Allows simultaneous operation of two indoor units on one floor. 	Quadruple Realises the optimum temperature distribution even in a large space. 
	Triple Can cover a large-scale space or dispersed installation on the same floor. 	

Connectable Combinations for Inverter Units

Outdoor Unit Capacity	Indoor Unit Capacity		
	Twin 50 : 50	Triple 33 : 33 : 33	Quadruple 25 : 25 : 25 : 25
71	35 × 2	—	—
100	50 × 2	—	—
125	60 × 2	—	—
140	71 × 2	50 × 3	—
200	100 × 2	60 × 3	50 × 4
250	125 × 2	71 × 3	60 × 4
Distribution Pipe	MSDD-50TR-E MSDD-50WR-E MSDD-50TR2-E2 MSDD-50WR2-E	MSDT-111R-E MSDT-111R3-E	MSDF-1111R-E MSDF-1111R2-E

Notes: 1) Indoor unit combinations with floor-standing (PS) units and other types are impossible.
2) The distribution pipe listed is required for simultaneous multi-systems.

Power Inverter SERIES

Our Eco-conscious Power Inverter Series is designed to achieve industry-leading seasonal energy-efficiency through use of New R32 refrigerant and advanced technologies.



R32



PUZ-ZM35/50VKA

R32



PUZ-ZM60/71VHA


R32




PUZ-ZM100/125/140V(Y)KA
PUZ-ZM200/250YKA

Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.

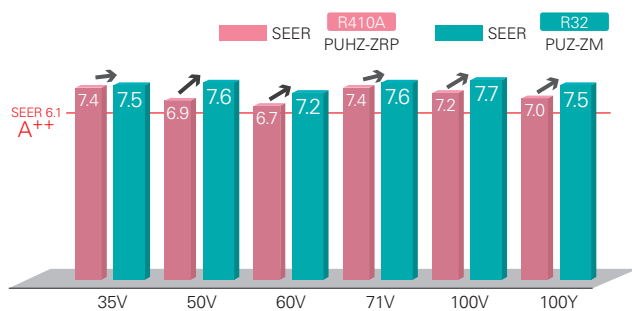

Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

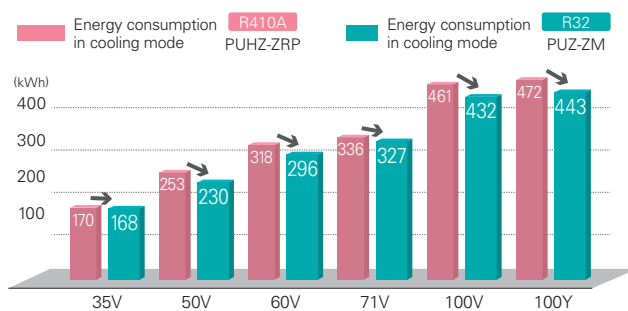


*Specifications reported are figures when PLA-ZM**EA is connected.

Longer piping (60/71/100/125/140/200/250)


Longer piping length realised for 60, 71, 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Piping Length	
	R410A PUHZ-ZRP	R32 PUZ-ZM
35/50	50m	50m
60/71	50m	55m
100/125/140	75m	100m
200/250	100m	100m

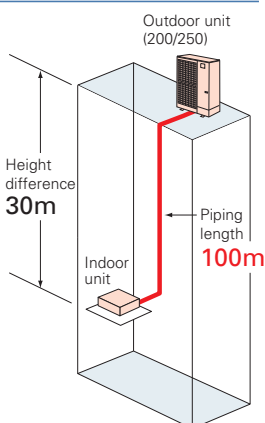

Rated heating capacity maintained down to -3°C*

Rated heating capacity maintained even when the outside temperature is down to -3°C. Stay warm even at times of cold weather.

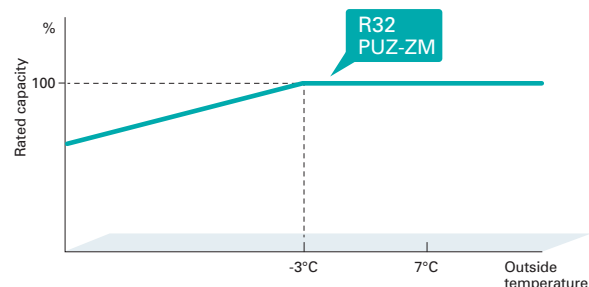



*PUZ-ZM35/50/60/71/100/125/140 only.

30Pa external static pressure

*Option (requires PAC-SJ71FM-E)

An external static pressure of 30Pa enables the outdoor unit to be installed on balconies in high-rise building or spaces near louvers.

30Pa external static pressure fan motor (option)
(PAC-SJ71FM-E)

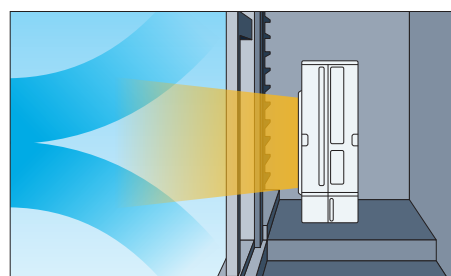

*Rated noise level will be higher when equipped with this option.


Standard Inverter SERIES

Our Standard Series become light and compact with greater energy-saving performance.



Improved energy efficiency


Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 6.6 achieved for all capacity range.

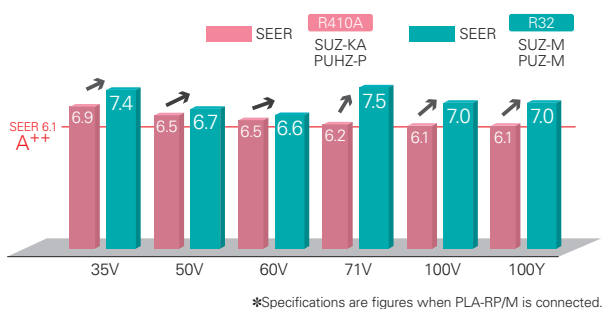

Longer piping (100/125/140/200/250)

Longer piping length realised for 100, 125, 140, 200 and 250 classes, widely increasing installation flexibility.

	Max. Piping Length	
	R410A SUZ-KA PUHZ-P	R32 SUZ-M PUZ-M
25/35	20m	20m
50/60/71	30m	30m
100	50m	55m
125/140	50m	65m
200/250	70m	70m




Light weight and compact size

Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation.


	SUZ-KA50VA6 Height 880mm Weight 54kg	➔		SUZ-M50VA Height 714mm Weight 41kg	18% reduction 24% reduction
	PUHZ-P140YHA2 Height 1,350mm Weight 101kg	➔		PUZ-M140YKA Height 981mm Weight 85kg	27% reduction 15% reduction

Unobstructive, compact, and easy to hide from view

Conventional outdoor units may spoil the view. Due to its compact size, the new model can be installed in locations that previous model is not suitable.

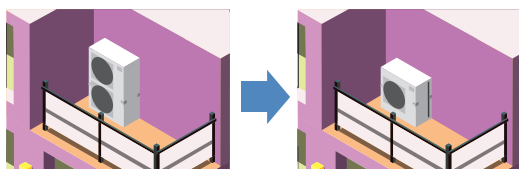

Easy transportation and installation

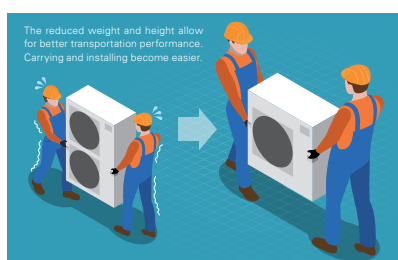

Transport efficiency improves thanks to its low height. The unit can even be transported by minivan.

PLA SERIES

PLA-ZM35/50/60/71/100/125/140EA

PLA-M35/50/60/71/100/125/140EA


A complete line-up including deluxe units that offer added energy savings. The incorporation of wide air-outlet and the "3D i-see Sensor" enhances airflow distribution control, achieving an enhanced level of comfort throughout the room. The synergy of higher energy efficiency and more comfortable room environment results in the utmost user satisfaction.



Deluxe 4-way Cassette Line-up


For users seeking even further energy savings, Mitsubishi Electric now offers deluxe units (PLA-ZM) to complete the line-up of models in this series, from 35-140. Compared to the standard models (PLA-RP), deluxe models provide additional energy savings, contributing to a significant reduction in electricity costs.

Indoor/Outdoor Unit Combinations

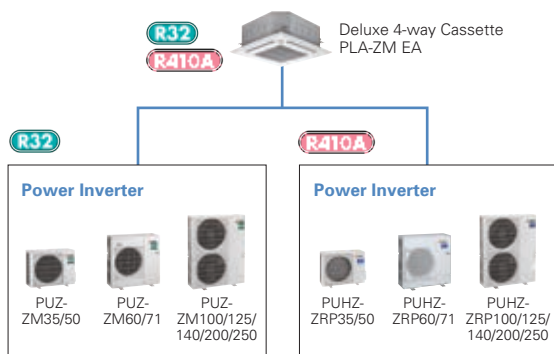


Line-up

Series	Model	35	50	60	71	100	125	140
R32 R410A	Deluxe 4-way Cassette (PLA-ZM)	●	●	●	●	●	●	●
R32 R410A	Standard 4-way Cassette (PLA-M)	●	●	●	●	●	●	●

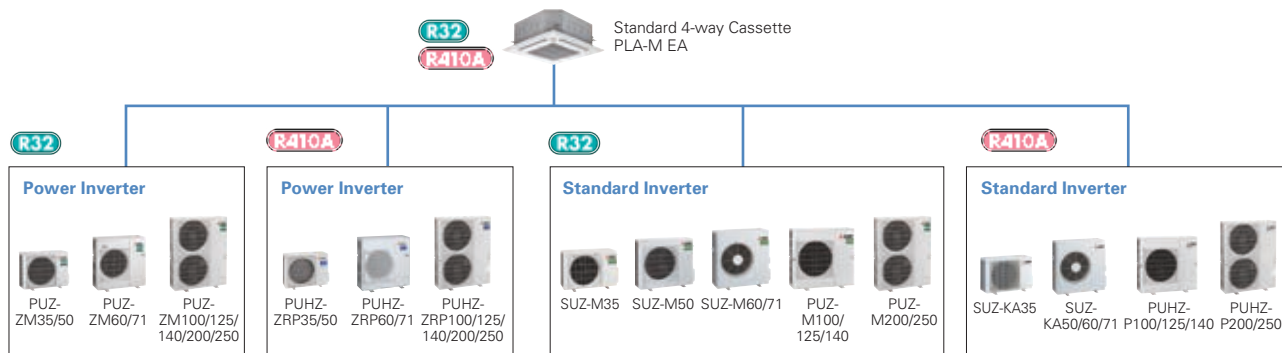


Industry-leading energy efficiency

Introduction of new R32 refrigerant realises improved cooling efficiency. Rating of more than 7.0 achieved for all capacity range.

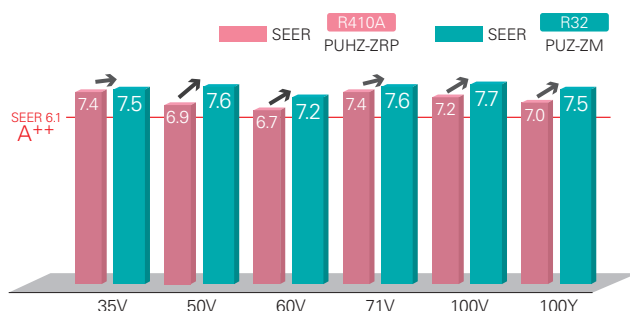

Introduction of new R32 refrigerant reduces energy consumption and realises energy savings.

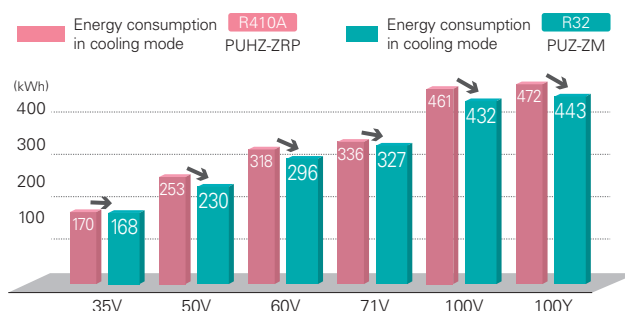


*Specifications reported are figures when PLA-ZM**EA is connected.

Horizontal Airflow

The new airflow control removes that uncomfortable drafty feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

[Horizontal airflow]

Model name: PLA-ZM140EA
Ceiling height: 3.2m
Mode: Cooling

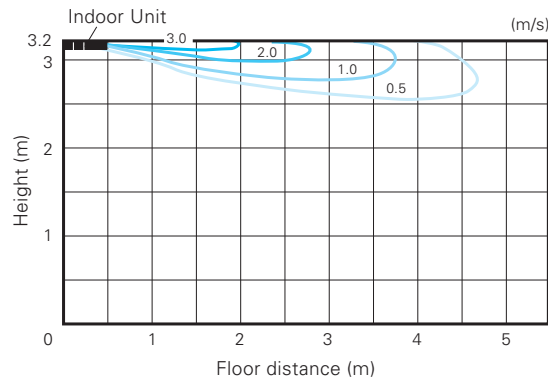

Automatic Grille Lowering Function (PLP-6EAJ)

An automatic grille lowering function is available for easy filter maintenance.

Special wired and wireless remote controllers can be used to lower the intake grille for maintenance.




Grille Elevation Remote Controller
(comes with the automatic elevation panel)



Wired Remote Controller



Wireless Remote Controller

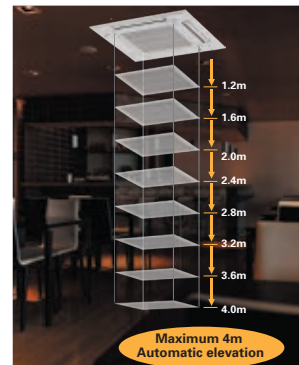

Easy Installation

Electrical box wiring

After reviewing the power supply terminal position in the electrical box, the structure was redesigned to improve connectivity. This has made previously complex wiring work easier.

■ Previous model (B Series)




■ New model (E Series)



Increased space for plumbing work

The top and bottom positions of the liquid and gas pipes have been reversed to allow the gas pipe work, which requires more effort, to be completed first. Further, through structural innovations related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving liquid pipe work and enabling it to be completed smoothly.

■ Previous model (B Series)



■ New model (E Series)



Temporary hanging hook

The structure of the panel has been revised and is now equipped with a temporary hanging hook. This has improved work efficiency during panel installation.



No need to remove screws

Installation is possible without removing the screws for the corner panel and the control box, simply loosen them. This lowers the risk of losing screws.

■ Corner panel



■ Control box cover



Lightweight decorative panel

After reviewing the structure and materials, weight has been reduced approximately 20% compared to the previous model, reducing the burden of installation.






Detects number of people

3D i-see Sensor detects the number of people in the room and sets the air-conditioning power accordingly. This makes automatic power-saving operation possible in places where the number of people entering and exiting is large. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it will save additional capacity or stop operation altogether.

Detects people's position

Once the position of a person is detected, the duct angle of the vane is automatically adjusted in that direction. Each vane can be independently set to "block wind" or "not block wind" according to taste.

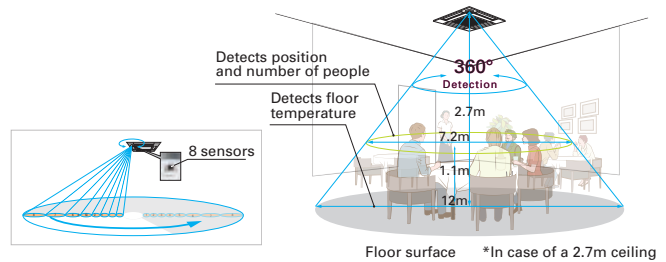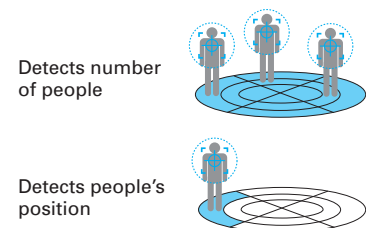

Detects number of people

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.


No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

* When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

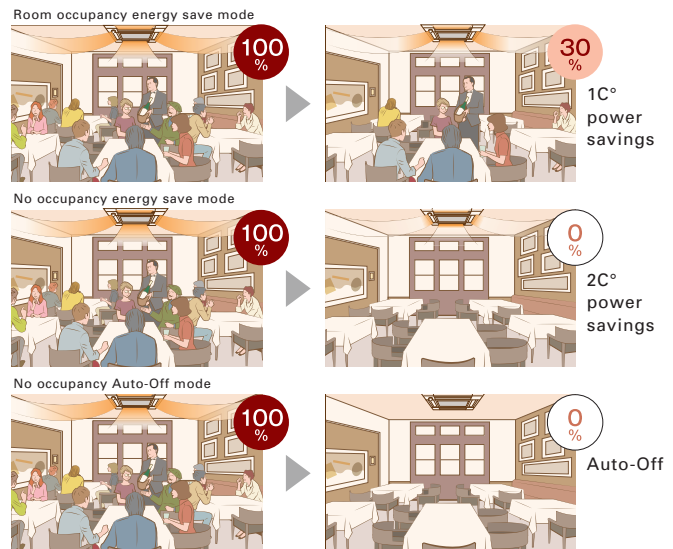


*PAR-40MAA is required for each setting

Detects people's position

Direct/Indirect settings*

Some people do not like the feel of wind, some want to be warm from head to toe. People's likes and dislikes vary. With the 3D i-see Sensor, it is possible to choose to block or not block to the wind for each vane.

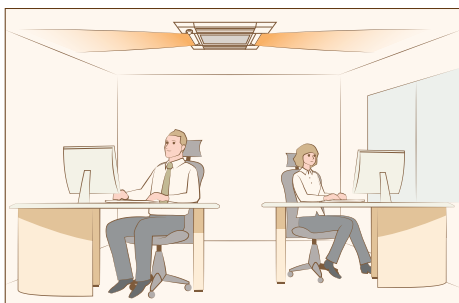

*PAR-40MAA or PAR-SL100A-E is required for each setting.


Seasonal airflow*

<When cooling>

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

<When heating>

The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

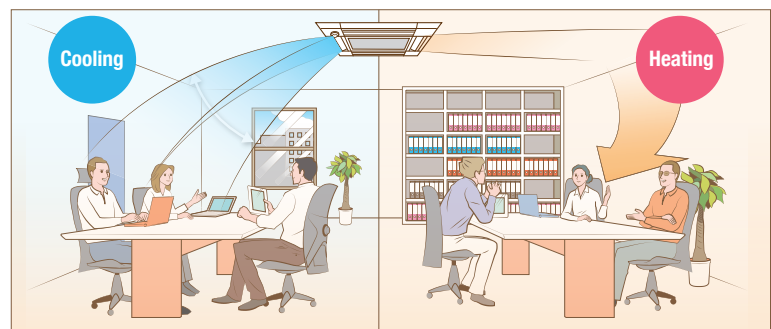

*PAR-40MAA is required for each setting.

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A



Panel PLA-ZM35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



*

* Enclosed in PLP-6EALM/PLP-6EALME

PLA-ZM EA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single								For Twin						For Triple			For Quadruple		
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe		—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E		

SERIES SELECTION

Standard Inverter Series

Indoor Unit

R32
R410A



Panel PLA-M35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

Outdoor Unit

R32

For Single



SUZ-M35



SUZ-M50



SUZ-M60/71



PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional



Optional



Optional



*

* Enclosed in PLP-6EALM/PLP-6EALME

PLA-M EA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single								For Twin						For Triple			For Quadruple		
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (SUZ & PUHZ-P)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-F		MSDT-111R3-E			MSDF-1111R2-F	

PLA-ZM SERIES

POWER INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PLA-ZM35EA	PLA-ZM50EA	PLA-ZM60EA	PLA-ZM71EA	PLA-ZM100EA		PLA-ZM125EA		PLA-ZM140EA		
Outdoor Unit			PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VHA	PUZ-ZM71VHA	PUZ-ZM100VKA	PUZ-ZM100YKA	PUZ-ZM125VKA	PUZ-ZM125YKA	PUZ-ZM140VKA	PUZ-ZM140YKA	
Refrigerant			R32*1										
Power Supply			Outdoor power supply VKA・VHA:230 / Single / 50, YKA:400 / Three / 50										
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min - Max	kW	1.6 ~ 4.5	2.3 ~ 5.6	2.7 ~ 6.5	3.3 ~ 8.1	4.9 ~ 11.4	4.9 ~ 11.4	5.5 ~ 14.0	5.5 ~ 14.0	6.2 ~ 15.0	6.2 ~ 15.0
	Total Input	Rated	kW	0.705	1.106	1.452	1.651	2.065	2.065	3.378	3.378	3.722	3.722
	EER			5.10	4.52	4.20	4.30	4.60	4.60	3.70	3.70	3.60	3.60
	EEL Rank			—	—	—	—	—	—	—	—	—	—
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
	Annual Electricity Consumption*2		kWh/a	168	230	296	327	432	443	—	—	—	—
	SEER			7.5	7.6	7.2	7.6	7.7	7.5	—	—	—	—
	Energy Efficiency Class			A++	A++	A++	A++	A++	A++	—	—	—	—
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
Heating (Average Season)		Min - Max	kW	1.6 ~ 5.2	2.5 ~ 7.3	2.8 ~ 8.2	3.5 ~ 10.2	4.5 ~ 14.0	4.5 ~ 14.0	5.0 ~ 16.0	5.0 ~ 16.0	5.7 ~ 18.0	5.7 ~ 18.0
	Total Input	Rated	kW	0.820	1.363	1.707	1.818	2.604	2.604	3.674	3.674	4.312	4.312
	COP			5.00	4.40	4.10	4.40	4.30	4.30	3.81	3.81	3.71	3.71
	EEL Rank			—	—	—	—	—	—	—	—	—	—
	Design Load		kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.5 (−10°C)	3.8 (−10°C)	4.4 (−10°C)	4.7 (−10°C)	7.8 (−10°C)	7.8 (−10°C)	—	—	—	—
		at bivalent temperature	kW	2.5 (−10°C)	3.8 (−10°C)	4.4 (−10°C)	4.7 (−10°C)	7.8 (−10°C)	7.8 (−10°C)	—	—	—	—
		at operation limit temperature	kW	2.1 (−11°C)	3.7 (−11°C)	2.8 (−20°C)	3.5 (−20°C)	5.8 (−20°C)	5.8 (−20°C)	—	—	—	—
	Back Up Heating Capacity		kW	0	0	0	0	0	0	—	—	—	—
	Annual Electricity Consumption*2		kWh/a	745	1083	1339	1370	2277	2277	—	—	—	—
SCOP			4.7	4.9	4.6	4.8	4.8	4.8	—	—	—	—	
Energy Efficiency Class			A++	A++	A++	A++	A++	A++	—	—	—	—	
Operating Current (max)			A	13.2	13.2	19.2	19.3	27.0	8.5	27.0	10.0	28.7	13.7
Indoor Unit	Input	Rated	kW	0.03	0.03	0.03	0.05	0.07	0.07	0.08	0.08	0.10	0.10
	Operating Current (max)		A	0.21	0.22	0.22	0.34	0.47	0.47	0.52	0.52	0.66	0.66
	Dimensions <Panel>	H x W x D	mm	258-840-840 <40-950-950>			24 <5>		26 <5>		298-840-840 <40-950-950>		26 <5>
	Weight <Panel>		kg	21 <5>			24 <5>		26 <5>		26 <5>		26 <5>
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	11-13-15-16	12-14-16-18	12-14-16-18	17-19-21-23	19-22-25-28	19-22-25-28	21-24-26-29	21-24-26-29	24-26-29-32	24-26-29-32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-33-36	31-34-37-40	31-34-37-40	33-36-39-41	33-36-39-41	36-39-42-44	36-39-42-44
	Sound Level (PWL)		dB(A)	51	54	54	57	61	61	62	62	65	65
	Dimensions	H x W x D	mm	630-809-300			943-950-330 (+25)		1,338-1,050-330 (+40)				
	Weight		kg	46	46	70	70	116	123	116	125	118	131
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120
Outdoor Unit		Heating	m³/min	45	45	55	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50
		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16
	Ext. Piping	Liquid / Gas	mm	6.35 / 12.7			9.52 / 15.88		9.52 / 15.88		9.52 / 15.88		9.52 / 15.88
	Max. Length	Out-In	m	50	50	55	55	100	100	100	100	100	100
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
	Guaranteed Operating Range [Outdoor]	Cooling*3	°C	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46
	Heating	°C	−11 ~ +21	−11 ~ +21	−20 ~ +21	−20 ~ +21	−20 ~ +21	−20 ~ +21	−20 ~ +21	−20 ~ +21	−20 ~ +21	−20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.



PLA-M SERIES

STANDARD INVERTER

Type			Inverter Heat Pump											
Indoor Unit			PLA-M35EA	PLA-M50EA	PLA-M60EA	PLA-M71EA	PLA-M100EA		PLA-M125EA		PLA-M140EA			
Outdoor Unit			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA	PUZ-M100YKA	PUZ-M125VKA	PUZ-M125YKA	PUZ-M140VKA	PUZ-M140YKA		
Refrigerant			R32 ^{*1}											
Power Supply			Outdoor power supply VA・VKA:230 / Single / 50, YKA:400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	5.5	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4	
		Min - Max	kW	0.8 - 3.9	1.2 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	5.8 - 13.0	5.8 - 13.0	5.8 - 14.1	5.8 - 14.1	
	Total Input	Rated	kW	0.90	1.61	1.84	1.91	2.71	2.71	4.01	4.01	4.96	4.96	
		EER		4.00	3.40	3.30	3.70	3.50	3.50	3.01	3.01	2.70	2.70	
	Design Load		kW	3.6	5.5	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4	
		Annual Electricity Consumption ^{*2}	kWh/a	170	285	320	331	474	474	—	—	—	—	
	SEER			7.4	6.7	6.6	7.5	7.0	7.0	—	—	—	—	
		Energy Efficiency Class		A++	A++	A++	A++	A++	A++	—	—	—	—	
	Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
			Min - Max	kW	1.0 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
Total Input		Rated	kW	0.97	1.73	1.84	2.21	3.01	3.01	3.63	3.63	4.39	4.39	
		COP		4.20	3.46	3.80	3.61	3.71	3.71	3.71	3.71	3.41	3.41	
Design Load			kW	2.6	4.3	4.6	5.8	8.0	8.0	8.5	8.5	9.4	9.4	
		Declared Capacity	at reference design temperature	kW	2.3 (−10°C)	3.8 (−10°C)	4.1 (−10°C)	5.2 (−10°C)	6.0 (−10°C)	6.0 (−10°C)	8.5 (−10°C)	8.5 (−10°C)	9.4 (−10°C)	9.4 (−10°C)
at bivalent temperature			kW	2.3 (−7°C)	3.8 (−7°C)	4.1 (−7°C)	5.2 (−7°C)	7.0 (−7°C)	7.0 (−7°C)	8.5 (−7°C)	8.5 (−7°C)	9.4 (−7°C)	9.4 (−10°C)	
at operation limit temperature			kW	2.3 (−10°C)	3.8 (−10°C)	4.1 (−10°C)	5.2 (−10°C)	4.5 (−15°C)	4.5 (−15°C)	6.0 (−15°C)	6.0 (−15°C)	7.0 (−15°C)	7.0 (−15°C)	
Back Up Heating Capacity			kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—	
		Annual Electricity Consumption ^{*2}	kWh/a	774	1456	1458	1796	2428	2428	—	—	—	—	
SCOP			4.7	4.1	4.4	4.5	4.6	4.6	—	—	—	—		
	Energy Efficiency Class		A++	A+	A+	A+	A++	A++	—	—	—	—		
Operating Current (max)			A	8.7	13.7	15.0	15.1	20.5	12.0	27.2	12.2	30.7	12.2	
Indoor Unit	Input	Rated	kW	0.03	0.03	0.03	0.04	0.07	0.07	0.10	0.10	0.10	0.10	
		Operating Current (max)	A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66	
	Dimensions <Panel>	H x W x D	mm	258 - 840 - 840			<40 - 950 - 950>		24 <5>		298 - 840 - 840		<40 - 950 - 950>	
	Weight <Panel>		kg	19 <5>			21 <5>		24 <5>		26 <5>		26 <5>	
	Air Volume	[Lo-Mi2-Mi1-Hi]	m³/min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32	
	Sound Level (SPL)	[Lo-Mi2-Mi1-Hi]	dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44	
	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65	
	Dimensions	H x W x D	mm	550-800-285			714-800-285		880-840-330		981-1050-330 (+40)			
	Weight		kg	35	41	54	55	76	78	84	85	84	85	
	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79.0	79.0	86.0	86.0	86.0	86.0	
Heating		m³/min	32.7	43.7	50.1	50.1	79.0	79.0	92.0	92.0	92.0	92.0		
Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55		
	Heating	dB(A)	48	49	51	51	54	54	56	56	57	57		
Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73		
	Heating	dB(A)	59	64	65	66	70	70	72	72	73	73		
Operating Current (max)		A	8.5	13.5	14.8	14.8	20.0	11.5	26.5	11.5	30.0	11.5		
	Breaker Size	A	10	20	20	20	32	16	32	16	40	16		
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	20	30	30	30	55	55	65	65	65	65	
	Max. Height	Out-In	m	12	30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]			Cooling ^{*3}	°C	−10 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	−15 ~ +46	
			Heating	°C	−10 ~ +24	−10 ~ +24	−10 ~ +24	−15 ~ +21	−15 ~ +21	−15 ~ +21	−15 ~ +21	−15 ~ +21	−15 ~ +21	

PLA-M SERIES

POWER INVERTER



Type			Inverter Heat Pump											
Indoor Unit			PLA-M35EA	PLA-M50EA	PLA-M60EA	PLA-M71EA	PLA-M100EA		PLA-M125EA		PLA-M140EA			
Outdoor Unit			PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VHA	PUZ-ZM71VHA	PUZ-ZM100VKA	PUZ-ZM100YKA	PUZ-ZM125VKA	PUZ-ZM125YKA	PUZ-ZM140VKA	PUZ-ZM140YKA		
Refrigerant			R32*1											
Power Supply			Outdoor power supply											
			VKA・VHA:230 / Single / 50, YKA:400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0	
	Total Input	Rated	kW	0.751	1.175	1.523	1.716	2.084	2.084	3.399	3.399	3.746	3.746	
	EER			4.79	4.25	4.00	4.14	4.56	4.56	3.68	3.68	3.58	3.58	
	EEL Rank			-	-	-	-	-	-	-	-	-	-	
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	-	-	-	-	
	Annual Electricity Consumption*2	kWh/a	172	234	299	332	435	435	-	-	-	-	-	
	SEER			7.3	7.4	7.1	7.4	7.6	7.4	-	-	-	-	
	Energy Efficiency Class			A++	A++	A++	A++	A++	A++	-	-	-	-	
	Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
Min - Max			kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0	
Total Input		Rated	kW	0.890	1.581	1.863	2.014	2.685	2.685	3.773	3.773	4.365	4.365	
COP				4.61	3.79	3.76	3.97	4.17	4.17	3.71	3.71	3.67	3.67	
EEL Rank			-	-	-	-	-	-	-	-	-	-		
Design Load			kW	2.5	3.8	4.4	4.7	7.8	7.8	-	-	-	-	
Declared Capacity		at reference design temperature	kW	2.5 (-10℃)	3.8 (-10℃)	4.4 (-10℃)	4.7 (-10℃)	7.8 (-10℃)	7.8 (-10℃)	-	-	-	-	
		at bivalent temperature	kW	2.5 (-10℃)	3.8 (-10℃)	4.4 (-10℃)	4.7 (-10℃)	7.8 (-10℃)	7.8 (-10℃)	-	-	-	-	
		at operation limit temperature	kW	2.1 (-11℃)	3.7 (-11℃)	2.8 (-20℃)	3.5 (-20℃)	5.8 (-20℃)	5.8 (-20℃)	-	-	-	-	
Back Up Heating Capacity			kW	0	0	0	0	0	0	-	-	-	-	
Annual Electricity Consumption*2	kWh/a	797	1184	1420	1432	2521	2521	-	-	-	-	-		
SCOP			4.3	4.4	4.3	4.6	4.3	4.3	-	-	-	-		
Energy Efficiency Class			A+	A+	A+	A++	A+	A+	-	-	-	-		
Operating Current (max)			A	13.2	13.2	19.2	19.3	27.0	8.5	27.2	10.2	28.7	13.7	
Indoor Unit	Input	Rated	kW	0.03	0.03	0.03	0.04	0.07	0.07	0.10	0.10	0.10	0.10	
			A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66	
	Operating Current (max)													
	Dimensions <Panel>	H x W x D	mm	258 - 840 - 840 <40 - 950 - 950>			21 <5>		24 <5>		26 <5>		26 <5>	
	Weight <Panel>		kg	19 <5>			21 <5>		24 <5>		26 <5>		26 <5>	
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44	
	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65	
	Dimensions	H x W x D	mm	630 - 809 - 300			943 - 950 - 330 (+25)		1,338 - 1,050 - 330 (+40)		118		131	
	Weight		kg	46			70		123		116		120	
Outdoor Unit	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120	
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120	
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50	
		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52	
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70	
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0	
		Breaker Size		A	16	16	25	25	32	16	32	16	40	16
	Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 12.7			9.52 / 15.88		9.52 / 15.88		9.52 / 15.88		9.52 / 15.88
		Max. Length	Out-In	m	50			55		100		100		100
		Max. Height	Out-In	m	30			30		30		30		30
Guaranteed Operating Range [Outdoor]			Cooling*3	℃	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	℃	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



Panel PLA-ZM35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EAL	✓	✓		
PLP-6EAL	✓			✓
PLP-6EAL	✓	✓		✓
PLP-6EAL	✓		✓	
PLP-6EAL	✓	✓	✓	

Outdoor Unit

R410A

For Single



R410A

For Multi
(Twin/Triple/Quadruple)



Remote Controller



Optional



Optional



Optional



*

* Enclosed in PLP-6EALM/PLP-6EALME

Standard Inverter Series



Indoor Unit

R410A



Panel PLA-M35/50/60/71/100/125/140EA

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EAL	✓	✓		
PLP-6EAL	✓			✓
PLP-6EAL	✓	✓		✓
PLP-6EAL	✓		✓	
PLP-6EAL	✓	✓	✓	

Outdoor Unit


R410A

For Single



R410A

For Multi
(Twin/Triple/Quadruple)

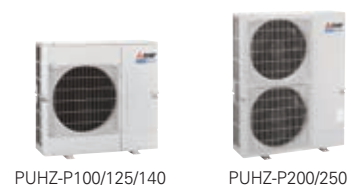

Remote Controller



Optional



Optional



Optional



*

* Enclosed in PLP-6EALM/PLP-6EALME

PLA-ZM/RP EA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR-E			MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E		
Standard Inverter (SUZ & PUHZ-P)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	–	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR-E			MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E		

PLA-ZM SERIES

POWER INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PLA-ZM35EA	PLA-ZM50EA	PLA-ZM60EA	PLA-ZM71EA	PLA-ZM100EA		PLA-ZM125EA		PLA-ZM140EA		
Outdoor Unit			PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP125YKA3	PUHZ-ZRP140VKA3	PUHZ-ZRP140YKA3	
Refrigerant			R410A* ^{†1}										
Power Supply			Outdoor power supply VKA・VHA:230 / Single / 50, YKA:400 / Three / 50										
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated	kW	0.78	1.33	1.66	1.79	2.20	2.20	3.84	3.84	4.36	4.36
	EER			—	—	—	—	—	—	3.25	3.25	3.07	3.07
	EEL Rank			—	—	—	—	—	—	—	—	—	—
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
	Annual Electricity Consumption* ^{‡2}		kWh/a	170	253	318	336	461	472	—	—	—	—
	SEER			7.4	6.9	6.7	7.4	7.2	7.0	—	—	—	—
	Energy Efficiency Class			A++	A++	A++	A++	A++	A++	—	—	—	—
	Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0
		Min - Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
Total Input		Rated	kW	0.85	1.55	1.89	1.90	2.60	2.60	3.67	3.67	4.84	4.84
COP				—	—	—	—	—	—	3.81	3.81	3.30	3.30
EEL Rank			—	—	—	—	—	—	—	—	—	—	
Design Load			kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—
Declared Capacity		at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—
Back Up Heating Capacity			kW	0	0	0	0	0	0	—	—	—	—
Operating Current (max)	Annual Electricity Consumption* ^{‡2}		kWh/a	714	1109	1337	1342	2229	2229	—	—	—	—
	SCOP			4.9	4.8	4.6	4.9	4.9	4.9	—	—	—	—
	Energy Efficiency Class			A++	A++	A++	A++	A++	A++	—	—	—	—
	Operating Current (max)	Rated	A	13.2	13.2	19.2	19.3	27.0	8.5	27.0	10.0	28.7	13.7
	Input		kW	0.03	0.03	0.03	0.05	0.07	0.07	0.08	0.08	0.10	0.10
	Operating Current (max)		A	0.21	0.22	0.22	0.34	0.47	0.47	0.52	0.52	0.66	0.66
	Dimensions <Panel>	H × W × D	mm	258 - 840 - 840	<40 - 950 - 950>					298 - 840 - 840	<40 - 950 - 950>		
	Weight <Panel>		kg	21 <5>						26 <5>			
	Air Volume [Lo-Mi2-Mi1-Hi]		m ³ /min	11-13-15-16	12-14-16-18	12-14-16-18	17-19-21-23	19-22-25-28	19-22-25-28	21-24-26-29	21-24-26-29	24-26-29-32	24-26-29-32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-33-36	31-34-37-40	31-34-37-40	33-36-39-41	33-36-39-41	36-39-42-44	36-39-42-44
Outdoor Unit	Sound Level (PWL)		dB(A)	51	54	54	57	61	61	62	62	65	65
	Dimensions	H × W × D	mm	630 - 809 - 300		943 - 950 - 330	(+30)			1338 - 1050 - 330	(+40)		
	Weight		kg	43	46	70	70	116	123	116	125	118	131
	Air Volume	Cooling	m ³ /min	45	45	55	55	110	110	120	120	120	120
		Heating	m ³ /min	45	45	55	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50
		Heating	dB(A)	46	46	48	48	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	50	50	50	50	75	75	75	75	75	75
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range [Outdoor]			Cooling* ^{‡3}	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*^{†1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*^{‡2} Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*^{‡3} Optional air protection guide is required where ambient temperature is lower than -5°C.

PLA-M SERIES

STANDARD INVERTER



Type			Inverter Heat Pump											
Indoor Unit			PLA-M35EA	PLA-M50EA	PLA-M60EA	PLA-M71EA	PLA-M100EA		PLA-M125EA		PLA-M140EA			
Outdoor Unit			SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	PUHZ-P100VKA	PUHZ-P100YKA	PUHZ-P125VKA	PUHZ-P125YKA	PUHZ-P140VKA	PUHZ-P140YKA		
Refrigerant			R410A* ^{†1}											
Power Supply			Outdoor power supply VA・VKA:230 / Single / 50, YKA:400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	5.5	5.7	7.1	9.4	9.4	12.1	12.1	13.6	13.6	
		Min - Max	kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 14.1	5.8 - 14.1	
	Total Input	Rated	kW	1.02	1.61	1.76	2.10	3.18	3.18	4.10	4.10	5.41	5.41	
	EER			—	—	—	—	2.95	2.95	2.95	2.95	2.51	2.51	
	EEL Rank			—	—	—	—	—	—	—	—	—	—	
	Design Load		kW	3.6	5.5	5.7	7.1	9.4	9.4	—	—	—	—	
	Annual Electricity Consumption* ^{‡2}		kWh/a	181	295	307	400	538	538	—	—	—	—	
	SEER			6.9	6.5	6.5	6.2	6.1	6.1	—	—	—	—	
	Energy Efficiency Class			A++	A++	A++	A++	A++	A++	—	—	—	—	
	Capacity	Rated	kW	4.1	5.8	6.9	8.0	11.2	11.2	13.5	13.5	15.0	15.0	
Heating (Average Season)		Min - Max	kW	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8	
	Total Input	Rated	kW	1.00	1.69	1.97	2.24	3.26	3.26	3.84	3.84	4.67	4.67	
	COP			—	—	—	—	3.43	3.43	3.51	3.51	3.21	3.21	
	EEL Rank			—	—	—	—	—	—	—	—	—	—	
	Design Load		kW	2.6	4.3	4.6	5.8	8.0	8.0	—	—	—	—	
	Declared Capacity	at reference design temperature	kW	2.3 (-10℃)	3.8 (-10℃)	4.0 (-10℃)	4.7 (-10℃)	6.0 (-10℃)	6.0 (-10℃)	—	—	—	—	
		at bivalent temperature	kW	2.3 (-7℃)	3.8 (-7℃)	4.1 (-7℃)	5.1 (-7℃)	7.0 (-7℃)	7.0 (-7℃)	—	—	—	—	
		at operation limit temperature	kW	2.3 (-10℃)	3.8 (-10℃)	4.0 (-10℃)	4.7 (-10℃)	4.5 (-15℃)	4.5 (-15℃)	—	—	—	—	
	Back Up Heating Capacity		kW	0.3	0.5	0.6	1.1	2.0	2.0	—	—	—	—	
	Annual Electricity Consumption* ^{‡2}		kWh/a	826	1505	1498	1888	2432	2432	—	—	—	—	
Operating Current (max)		Rated	A	8.4	12.2	14.2	16.4	20.5	12.0	27.2	12.2	30.7	12.2	
	Input		kW	0.03	0.03	0.03	0.04	0.07	0.07	0.10	0.10	0.10	0.10	
	Operating Current (max)		A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66	0.66	
	Dimensions <Panel>	H × W × D	mm	258 - 840 - 840			<40 - 950 - 950>			298 - 840 - 840			<40 - 950 - 950>	
	Weight <Panel>		kg	19 <6>			21 <6>			24 <6>			26 <6>	
	Air Volume [Lo-Mi2-Mi1-Hi]		m ³ /min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44	
	Sound Level (PWL)		dB(A)	51	54	54	56	61	61	65	65	65	65	
	Dimensions	H × W × D	mm	550 - 800 - 285			880 - 840 - 330			981 - 1050 - 330				
	Weight		kg	35	54	50	53	76	78	84	85	84	85	
Outdoor Unit	Air Volume	Cooling	m ³ /min	36.3	44.6	40.9	50.1	79	79	86	86	85	85	
		Heating	m ³ /min	34.8	44.6	49.2	48.2	79	79	92	92	92	92	
	Sound Level (SPL)	Cooling	dB(A)	49	52	55	55	51	51	54	54	56	56	
		Heating	dB(A)	50	52	55	55	54	54	56	56	57	57	
	Sound Level (PWL)	Cooling	dB(A)	62	65	65	69	70	70	72	72	75	75	
	Operating Current (max)		A	8.2	12.0	14.0	16.1	20	11.5	26.5	11.5	30.0	11.5	
	Breaker Size		A	10	20	20	20	32	16	32	16	40	16	
	Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
		Max. Length	Out-In	m	20	30	30	30	50	50	50	50	50	
		Max. Height	Out-In	m	12	30	30	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]		Cooling* ^{‡3}	℃	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
		Heating	℃	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	

PLA-M SERIES

POWER INVERTER



Type			Inverter Heat Pump									
Indoor Unit			PLA-M35EA	PLA-M50EA	PLA-M60EA	PLA-M71EA	PLA-M100EA		PLA-M125EA		PLA-M140EA	
Outdoor Unit			PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP125YKA3	PUHZ-ZRP140VKA3	PUHZ-ZRP140YKA3
Refrigerant			R410A*1									
Power Supply			Outdoor power supply									
Cooling			VKA · VHA-230 / Single / 50, YKA-400 / Three / 50									
Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
	Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.5	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	kW	0.83	1.42	1.75	1.87	2.23	2.23	3.87	3.87	4.39	4.39
	EER		—	—	—	—	—	—	3.23	3.23	3.05	3.05
	EEL Rank		—	—	—	—	—	—	—	—	—	—
	Design Load	kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—
	Annual Electricity Consumption*2	kWh/a	174	258	321	341	465	476	—	—	—	—
	SEER		7.2	6.7	6.6	7.2	7.1	6.9	—	—	—	—
	Energy Efficiency Class		A++	A++	A++	A++	A++	A++	—	—	—	—
	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
Heating (Average Season)	Min - Max	kW	1.6 - 5.8	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	kW	0.92	1.81	2.07	2.11	2.69	2.69	3.77	3.77	4.90	4.90
	COP		—	—	—	—	—	—	3.71	3.71	3.26	3.26
	EEL Rank		—	—	—	—	—	—	—	—	—	—
	Design Load	kW	2.5	3.8	4.4	4.7	7.8	7.8	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—
		at bivalent temperature	kW	2.5 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—
		at operation limit temperature	kW	2.1 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—
	Back Up Heating Capacity	kW	0	0	0	0	0	0	—	—	—	—
	Annual Electricity Consumption*2	kWh/a	764	1212	1418	1402	2468	2468	—	—	—	—
SCOP	Rated	kW	4.5	4.3	4.3	4.6	4.4	4.4	—	—	—	—
	Energy Efficiency Class		A+	A+	A+	A++	A+	A+	—	—	—	—
Operating Current (max)			A	13.2	13.2	19.2	19.3	27.0	8.5	27.2	10.2	28.7
Indoor Unit	Input	Rated	kW	0.03	0.03	0.03	0.04	0.07	0.07	0.10	0.10	0.10
	Operating Current (max)		A	0.20	0.22	0.24	0.27	0.46	0.46	0.66	0.66	0.66
	Dimensions <Panel>	H × W × D	mm	258 - 840 - 840	<40 - 950 - 950>	—	—	—	298 - 840 - 840	<40 - 950 - 950>	—	—
	Weight <Panel>	kg	19 <5>	19 <5>	21 <5>	21 <5>	24 <5>	24 <5>	26 <5>	26 <5>	26 <5>	26 <5>
	Air Volume [Lo-Mi2-Mi1-Hi]	m³/min	11-13-15-16	12-14-16-18	12-14-16-18	14-17-19-21	19-23-26-29	19-23-26-29	21-25-28-31	21-25-28-31	24-26-29-32	24-26-29-32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]	dB(A)	26-28-29-31	27-29-31-32	27-29-31-32	28-30-32-34	31-34-37-40	31-34-37-40	33-37-41-44	33-37-41-44	36-39-42-44	36-39-42-44
	Sound Level (PWL)	dB(A)	51	54	54	56	61	61	65	65	65	65
	Dimensions	H × W × D	mm	630 - 809 - 300	943 - 950 - 330 (+30)	—	—	—	1338 - 1050 - 330 (+40)	—	—	—
	Weight	kg	43	46	70	70	116	123	116	125	118	131
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120
Outdoor Unit		Heating	m³/min	45	45	55	55	110	110	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50
		Heating	dB(A)	46	46	48	48	51	51	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70
		Heating	dB(A)	65	65	67	67	69	69	70	70	70
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0
	Breaker Size		A	16	16	25	25	32	16	32	16	40
	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	50	50	50	50	75	75	75	75	75
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30
Ext. Piping	Max. Operating Range	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
	[Outdoor]	Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PEAD SERIES

R32
R410A


PEAD-M35/50/60/71/100/125/140JA(L)

The thin, ceiling-concealed indoor units of this series are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.



Compact Indoor Units

The height of the models from 35–140 has been unified to 250mm, which makes installation in low ceilings with minimal clearance space possible.

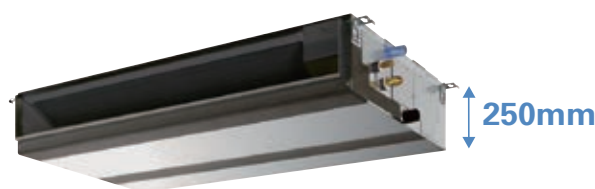


PEAD-M JA(L)

External Static Pressure

External static pressure conversion can be set up to five stages. Capable of being set to a maximum of 150Pa, units are applicable to a wide range of building types.

ErP Lot 10-compliant, Achieving High Energy Efficiency of SEER/SCOP Rank A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of the newly designed Power Inverter Series (PUHZ-ZRP) and resulting in compliance of the full-capacity models with ErP Lot 10 and energy rankings of A+/A++ for cooling and A/A+ for heating. This contributes to an impressive reduction in the cost of annual electricity.

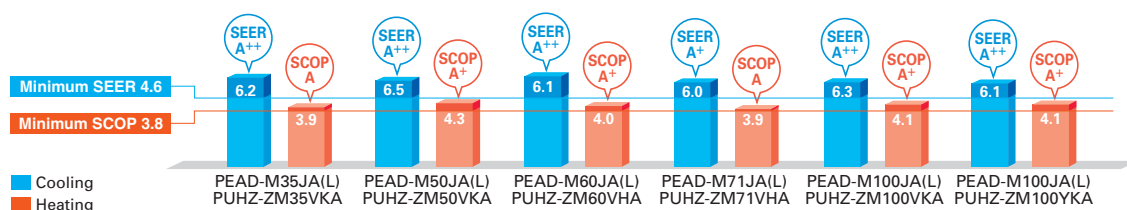

Drain Pump Option Available with All Models

The line-up consists of two types, models with or without a built-in drain pump.



PEAD-M JA → Drain pump built-in



PEAD-M JAL → No drain pump

* Units with an "L" included at the end of the model name are not equipped with a drain pump.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140

Outdoor Unit

R32

For Single



PUZ-ZM35/50

PUZ-ZM60/71

PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71

PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional

PEAD-M JA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E				MSDD-50WR2-E		MSDT-111R3-E			MSDF-111B2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140

Outdoor Unit

R32

For Single



SUZ-M35

SUZ-M50

SUZ-M60/71

PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140

PUZ-M200/250

Remote Controller



Optional



Optional



Optional




Optional

PEAD-M JA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-F		MSDT-111R3-E			MSDF-111R2-F	

PEAD-M SERIES

POWER INVERTER



Type			Inverter Heat Pump									
Indoor Unit			PEAD-M35JA(L)	PEAD-M50JA(L)	PEAD-M60JA(L)	PEAD-M71JA(L)	PEAD-M100JA(L)		PEAD-M125JA(L)		PEAD-M140JA(L)	
Outdoor Unit			PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VHA	PUZ-ZM71VHA	PUZ-ZM100VKA	PUZ-ZM100YKA	PUZ-ZM125VKA	PUZ-ZM125YKA	PUZ-ZM140VKA	PUZ-ZM140YKA
Refrigerant			R32*									
Power Supply			Outdoor power supply									
Cooling			VKA • VHA: 230 / Single / 50, YKA: 400 / Three / 50									
Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
	Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.3	6.2 - 15.3
	Total Input	Rated	kW	0.837(0.820)	1.201(1.187)	1.509(1.495)	1.858(1.844)	2.272(2.256)	2.272(2.256)	3.333(3.315)	3.333(3.315)	3.631(3.611)
	EER ^{*4}		4.30(4.39)	4.16(4.21)	4.04(4.08)	3.82(3.85)	4.18(4.21)	4.18(4.21)	3.75(3.77)	3.75(3.77)	3.69(3.71)	3.69(3.71)
	Design Load	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
	Annual Electricity Consumption ^{*2}	kWh/a	217(201)	282(268)	350(337)	428(414)	534(521)	543(532)	—	—	—	—
	SEER ^{*4}		5.8(6.2)	6.2(6.5)	6.1(6.3)	5.8(6.0)	6.1(6.2)	6.1(6.2)	—	—	—	—
	Energy Efficiency Class		A++(A++)	A++(A++)	A++(A++)	A+(A+)	A++(A++)	A++(A++)	—	—	—	—
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	14.0	14.0	16.0	16.0
	Min - Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
Heating (Average Season)	Total Input	Rated	kW	0.917	1.312	1.616	1.932	2.598	3.349	3.349	3.970	3.970
	COP ^{*3}		4.47	4.57	4.33	4.14	4.31	4.31	4.18	4.18	4.03	4.03
	Design Load	kW	2.4	3.8	4.4	4.9	7.8	7.8	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.4(-10°C)	3.8(-10°C)	4.4(-10°C)	4.9(-10°C)	7.8(-10°C)	7.8(-10°C)	—	—	—
		at bivalent temperature	kW	2.4(-10°C)	3.8(-10°C)	4.4(-10°C)	4.9(-10°C)	7.8(-10°C)	7.8(-10°C)	—	—	—
		at operation limit temperature	kW	2.2(-11°C)	3.7(-11°C)	2.8(-20°C)	3.7(-20°C)	5.8(-20°C)	5.8(-20°C)	—	—	—
	Back Up Heating Capacity	kW	0	0	0	0	0	0	—	—	—	—
	Annual Electricity Consumption ^{*2}	kWh/a	858	1237	1540	1751	2666	2666	—	—	—	—
	SCOP ^{*4}		3.9	4.3	4.0	3.9	4.1	4.1	—	—	—	—
	Energy Efficiency Class		A	A+	A+	A	A+	A+	—	—	—	—
Operating Current (max)			A	14.1	14.4	20.6	21.0	29.2	10.7	29.3	12.3	30.8
Indoor Unit	Input (Cooling / Heating)	Rated	kW	0.09/0.07	0.11/0.09	0.12/0.10	0.17/0.15	0.25/0.23	0.25/0.23	0.36/0.34	0.36/0.34	0.39/0.37
	Operating Current (max)		A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78
	Dimensions <Panel>	H × W × D	mm	250-900-732	27(26)	30(29)	30(29)	39(38)	39(38)	40(39)	40(39)	44(43)
	Weight <Panel>	kg	26(25)	27(26)	30(29)	30(29)	39(38)	39(38)	40(39)	40(39)	44(43)	44(43)
	Air Volume (Lo-Mid-Hi)	m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	17.5-21.0-25.0	24.0-29.0-34.0	24.0-29.0-34.0	29.5-35.5-42.0	29.5-35.5-42.0	32.0-39.0-46.0	32.0-39.0-46.0
	External Static Pressure	Pa	35 / 50 / 70	100 / 150	150 / 200	200 / 250	250 / 300	300 / 350	350 / 400	400 / 450	450 / 500	500 / 550
	Sound Level (SPL) (Lo-Mid-Hi)	dB(A)	23 - 27 - 30	26 - 31 - 35	25 - 29 - 33	26 - 30 - 34	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40	33 - 36 - 40	34 - 38 - 43	34 - 38 - 43
	Sound Level (PWL)	dB(A)	54	59	55	58	62	62	66	66	67	67
	Dimensions	H × W × D	mm	630 - 809 - 300	943 - 950 - 330(+25)	—	—	1338 - 1050 - 330(+40)	—	—	—	—
	Weight	kg	46	46	70	70	116	123	116	125	118	131
Outdoor Unit	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50
		Heating	dB(A)	46	46	49	49	51	50	50	50	50
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70
		Heating	dB(A)	65	65	67	67	69	69	70	70	70
	Operating Current (max)	A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0
	Breaker Size	A	16	16	25	25	32	16	32	16	40	16
	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	50	50	55	55	100	100	100	100	100
Ext. Piping	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30
	Guaranteed Operating Range	Cooling ^{*3}	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21
		Outdoor	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21


*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP. If leaked to the atmosphere, this appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

PEAD-M SERIES

STANDARD INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PEAD-M35JA(L)	PEAD-M50JA(L)	PEAD-M60JA(L)	PEAD-M71JA(L)	PEAD-M100JA(L)		PEAD-M125JA(L)		PEAD-M140JA(L)		
Outdoor Unit			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA	PUZ-M100YKA	PUZ-M125VKA	PUZ-M125YKA	PUZ-M140VKA	PUZ-M140YKA	
Refrigerant			R32*1										
Power Source			Outdoor power supply										
Cooling			VA・VKA: 230 / Single / 50, YKA: 400 / Three / 50										
	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
		Min - Max	kW	0.8 - 3.9	1.7 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	6.0 - 13.0	6.0 - 13.0	6.1 - 14.1	6.1 - 14.1
	Total Input	Rated	kW	0.92(0.90)	1.35(1.33)	1.69(1.67)	2.02(2.00)	2.87(2.85)	2.87(2.85)	4.01(3.99)	4.01(3.99)	4.76	4.76
	EER*4			3.90(4.00)	3.70(3.75)	3.60(3.65)	3.50(3.55)	3.30(3.33)	3.30(3.33)	3.01(3.03)	3.01(3.03)	2.81	2.81
	EEL Rank			—	—	—	—	—	—	—	—	—	—
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
	Annual Electricity Consumption*2		kWh/a	217(199)	287(271)	353(335)	428(411)	613(598)	613(598)	—	—	—	—
	SEER*4			5.8(6.3)	6.1(6.4)	6.0(6.3)	5.8(6.0)	5.4(5.5)	5.4(5.5)	—	—	—	—
	Energy Efficiency Class			A+(A++)	A+(A++)	A+(A++)	A+(A+)	A(A)	A(A)	—	—	—	—
	Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0
Min - Max			kW	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
Total Input		Rated	kW	1.02	1.46	1.84	2.15	2.94	2.94	3.73	3.73	4.15	4.15
COP*4				4.00	4.10	3.80	3.71	3.80	3.80	3.61	3.61	3.61	3.61
EEL Rank			—	—	—	—	—	—	—	—	—	—	
Design Load			kW	2.6	4.3	4.6	5.8	8.0	8.0	8.5	8.5	9.4	9.4
Declared Capacity		at reference design temperature	kW	2.3(-10℃)	3.8(-10℃)	4.1(-10℃)	5.2(-10℃)	6.0(-10℃)	6.0(-10℃)	8.5(-10℃)	8.5(-10℃)	9.4(-10℃)	9.4(-10℃)
		at bivalent temperature	kW	2.3(-7℃)	3.8(-7℃)	4.1(-7℃)	5.2(-7℃)	7.0(-7℃)	7.0(-7℃)	8.5(-10℃)	8.5(-10℃)	9.4(-10℃)	9.4(-10℃)
		at operation limit temperature	kW	2.3(-10℃)	3.8(-10℃)	4.1(-10℃)	5.2(-10℃)	4.5(-15℃)	4.5(-15℃)	6.0(-15℃)	6.0(-15℃)	7.0(-15℃)	7.0(-15℃)
Back Up Heating Capacity			kW	0.5	0.5	0.5	0.6	2.0	2.0	—	—	—	—
Annual Electricity Consumption*2		kWh/a	931	1430	1594	2080	2795	2795	—	—	—	—	
SCOP*4			3.9	4.2	4.0	3.9	4.0	4.0	—	—	—	—	
Energy Efficiency Class			A	A+	A+	A	A+	A+	—	—	—	—	
Operating Current (max)			A	9.6	14.9	16.4	16.8	22.7	14.2	29.3	14.3	32.8	14.3
Indoor Unit	Input [Cooling / Heating] Rated	kW	0.09(0.07)/0.07	0.11(0.09)/0.09	0.12(0.10)/0.10	0.17(0.15)/0.15	0.25(0.23)/0.23	0.25(0.23)/0.23	0.36(0.34)/0.34	0.36(0.34)/0.34	0.39(0.37)/0.37	0.39(0.37)/0.37	
	Operating Current (max)	A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	2.78	
	Dimensions <Panel>	H x W x D	mm	250-900-732		250-1100-732		250-1400-732		250-1600-732			
	Weight <Panel>	kg	26(25)		27(26)		30(29)		39(38)		44(43)		
	Air Volume [Lo-Mid-Hi]	m³/min	10.0-12.0-14.0		12.0-14.5-17.0		14.5-18.0-21.0		17.5-21.0-25.0		24.0-29.0-34.0		
	External Static Pressure	Pa	35 / 50 / 70		100 / 150		150 / 200		200 / 250		250 / 300		
	Sound Level (SPL) [Lo-Mid-Hi]	dB(A)	23 - 27 - 30		26 - 31 - 35		25 - 29 - 33		26 - 30 - 34		29 - 34 - 38		
	Sound Level (PWL)	dB(A)	54		59		55		58		62		
	Dimensions	H x W x D	mm	550 - 800 - 285		714 - 800 - 285		880 - 840 - 330		981 - 1050 - 330		981 - 1050 - 330	
Outdoor Unit	Weight	kg	35		41		54		55		76		
	Air Volume	Cooling	m³/min	34.3		45.8		50.1		50.1		79.0	
		Heating	m³/min	32.7		43.7		50.1		50.1		79.0	
	Sound Level (SPL)	Cooling	dB(A)	48		48		49		49		54	
		Heating	dB(A)	48		49		51		51		54	
	Sound Level (PWL)	Cooling	dB(A)	59		64		65		66		70	
		Heating	dB(A)	59		64		65		66		70	
	Operating Current (max)	A	8.5		13.5		14.8		14.8		20.0		
	Breaker Size	A	16		20		20		20		32		
	Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52		6.35 / 12.7		6.35 / 15.88		9.52 / 15.88		9.52 / 15.88
Max. Length		Out-In	m	20		30		30		55		55	
Max. Height		Out-In	m	12		30		30		30		30	
Guaranteed Operating Range [Outdoor]		Cooling*3	℃	-10 ~ +46		-15 ~ +46		-15 ~ +46		-15 ~ +46		-15 ~ +46	
	Heating	℃	-10 ~ +24		-10 ~ +24		-10 ~ +24		-15 ~ +21		-15 ~ +21		

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32

R410A



PEAD-M35/50/60/71/100/125/140

Outdoor Unit

R410A

For Single



PUHZ-ZRP35/50



PUHZ-ZRP60/71



PUHZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP71



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional

Standard Inverter Series



Indoor Unit

R32

R410A



PEAD-M35/50/60/71/100/125/140

Outdoor Unit

R410A

For Single



SUZ-KA35



SUZ-KA50/60/71



PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-P100/125/140



PUHZ-P200/250

Remote Controller



Optional



Optional



Optional



Optional


PEAD-M JA(L) Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E	
Standard Inverter (PUHZ-P & SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E		MSDT-111R-E			MSDF-1111R-E	

PEAD-M SERIES

POWER INVERTER



Type			Inverter Heat Pump										
Indoor Unit			PEAD-M35JA(L)	PEAD-M50JA(L)	PEAD-M60JA(L)	PEAD-M71JA(L)	PEAD-M100JA(L)		PEAD-M125JA(L)		PEAD-M140JA(L)		
Outdoor Unit			PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP125YKA3	PUHZ-ZRP140VKA3	PUHZ-ZRP140YKA3	
Refrigerant			R410A*1										
Power Supply			Outdoor power supply										
			VKA - VHA-230 / Single / 50, YKA-400 / Three / 50										
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.3	6.2 - 15.3
	Total Input	Rated	kW	0.89(0.87)	1.44(1.42)	1.65(1.63)	2.01(1.99)	2.43(2.41)	2.43(2.41)	3.86(3.83)	3.86(3.83)	4.32(4.29)	4.32(4.29)
	EER*4			—	—	—	—	—	—	3.24(3.26)	3.24(3.26)	3.10(3.12)	3.10(3.12)
	EEL Rank			—	—	—	—	—	—	—	—	—	—
	Design Load	kW	3.6	5.0	6.1	7.1	9.5	9.5	—	—	—	—	—
	Annual Electricity Consumption*2	kWh/a	221(205)	304(288)	355(340)	428(411)	554(543)	565(554)	—	—	—	—	—
	SEER*4		5.7(6.1)	5.7(6.0)	6.0(6.1)	5.8(6.0)	6.0(6.1)	5.8(6.0)	—	—	—	—	—
	Energy Efficiency Class			A+ (A++)	A+ (A++)	A+ (A++)	A+ (A++)	A+ (A++)	A+ (A++)	—	—	—	—
	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
Heating (Average Season)		Min - Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated	kW	0.95	1.50	1.79	2.03	2.60	2.60	3.51	3.51	4.07	4.07
	COP*4			—	—	—	—	—	—	3.99	3.99	3.93	3.93
	EEL Rank			—	—	—	—	—	—	—	—	—	—
	Design Load	kW	2.4	3.8	4.4	4.9	7.8	7.8	—	—	—	—	—
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.9 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	—	—	—	—
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.7 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	—	—	—	—
	Back Up Heating Capacity	kW	0	0	0	0	0	0	—	—	—	—	—
	Annual Electricity Consumption*2	kWh/a	839	1231	1513	1762	2627	2627	—	—	—	—	—
SCOP*4		4.0	4.3	4.1	3.9	4.2	4.2	—	—	—	—	—	
Energy Efficiency Class			A+	A+	A+	A	A+	A+	—	—	—	—	
Operating Current (max)			A	14.1	14.4	20.6	21.0	29.2	10.7	29.3	12.3	30.8	15.8
Indoor Unit	Input (Cooling / Heating) Rated		kW	0.09(0.07)/0.07	0.11(0.09)/0.09	0.12(0.10)/0.10	0.17(0.15)/0.15	0.25(0.23)/0.23	0.25(0.23)/0.23	0.36(0.34)/0.34	0.36(0.34)/0.34	0.39(0.37)/0.37	0.39(0.37)/0.37
	Operating Current (max)		A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	2.78
	Dimensions <Panel>		H x W x D	mm	250-900-732	250-900-732	250-1100-732	250-1100-732	250-1400-732	250-1400-732	250-1600-732	250-1600-732	
	Weight <Panel>		kg	26(25)	27(26)	30(29)	30(29)	39(38)	39(38)	40(39)	40(39)	44(43)	44(43)
	Air Volume (Lo-Mid-Hi)		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	17.5-21.0-25.0	24.0-29.0-34.0	24.0-29.0-34.0	29.5-35.5-42.0	29.5-35.5-42.0	32.0-39.0-46.0	32.0-39.0-46.0
	External Static Pressure		Pa	35 / 50 / 70 / 100 / 150									
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	23 - 27 - 30	26 - 31 - 35	25 - 29 - 33	26 - 30 - 34	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40	33 - 36 - 40	34 - 38 - 43	34 - 38 - 43
	Sound Level (PWL)		dB(A)	54	59	55	58	62	62	66	66	67	67
	Outdoor Unit	Dimensions		H x W x D	mm	630 - 809 - 300	630 - 809 - 300	943 - 950 - 330 (+30)	943 - 950 - 330 (+30)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)
		Weight		kg	43	46	70	70	116	123	116	125	118
Air Volume		Cooling	m³/min	45	45	55	55	110	110	120	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120
Sound Level (SPL)		Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50
		Heating	dB(A)	46	46	48	48	51	51	52	52	52	52
Sound Level (PWL)		Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70
		Heating	dB(A)	65	65	67	67	69	69	70	70	70	70
Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0	
Breaker Size		A	16	16	25	25	32	16	32	16	40	16	
Ext. Piping	Diameter		Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length		Out-In	m	50	50	50	50	75	75	75	75	75
	Max. Height		Out-In	m	30	30	30	30	30	30	30	30	30
	Guaranteed Operating Range [Outdoor]		Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21


*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

PEAD-M SERIES

STANDARD INVERTER




Type			Inverter Heat Pump											
Indoor Unit			PEAD-M35JA(L)	PEAD-M50JA(L)	PEAD-M60JA(L)	PEAD-M71JA(L)	PEAD-M100JA(L)		PEAD-M125JA(L)		PEAD-M140JA(L)			
Outdoor Unit			SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	PUHZ-P100VKA	PUHZ-P100YKA	PUHZ-P125VKA	PUHZ-P125YKA	PUHZ-P140VKA	PUHZ-P140YKA		
Refrigerant			R410A*1											
Power Supply	Source Outdoor (V/Phase/Hz)		Outdoor power supply VA・VKA-230 / Single / 50, YKA-400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	4.9	5.7	7.1	9.4	9.4	12.1	12.1	13.6	13.6	
		Min - Max	kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 14.1	5.8 - 14.1	
	Total Input	Rated	kW	1.050 (1.030)	1.480 (1.460)	1.670 (1.650)	2.080 (2.060)	2.98 (2.96)	2.98 (2.96)	4.15 (4.14)	4.15 (4.14)	5.21 (5.19)	5.21 (5.19)	
	EER*4			—	—	—	—	3.17	3.17	2.91 (2.92)	2.91 (2.92)	2.61 (2.62)	2.61 (2.62)	
		EEL Rank		—	—	—	—	—	—	—	—	—	—	
	Design Load		kW	3.6	4.9	5.7	7.1	9.4	9.4	—	—	—	—	
	Annual Electricity Consumption*2		kWh/a	222 (210)	302 (290)	337 (325)	408 (396)	644 (627)	644 (627)	—	—	—	—	
	SEER*4			5.6 (6.0)	5.6 (5.9)	5.9 (6.1)	6.1 (6.2)	5.1 (5.2)	5.1 (5.2)	—	—	—	—	
		Energy Efficiency Class		A+ (A+)	A+ (A+)	A+ (A+)	A+ (A+)	A (A)	A (A)	—	—	—	—	
Heating (Average Season)	Capacity	Rated	kW	4.1	5.9	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0	
		Min - Max	kW	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8	
	Total Input	Rated	kW	1.110	1.620	1.930	2.040	2.94	2.94	3.73	3.73	4.27	4.27	
	COP*4			—	—	—	—	3.80	3.80	3.61	3.61	3.51	3.51	
		EEL Rank		—	—	—	—	—	—	—	—	—	—	
	Design Load		kW	2.8	4.4	4.5	6.0	8.0	8.0	—	—	—	—	
	Declared Capacity	at reference design temperature	kW	2.5 (-10℃)	3.9 (-10℃)	4.1 (-10℃)	5.3 (-10℃)	6.0 (-10℃)	6.0 (-10℃)	—	—	—	—	
		at bivalent temperature	kW	2.5 (-7℃)	3.9 (-7℃)	4.1 (-7℃)	5.3 (-7℃)	7.0 (-7℃)	7.0 (-7℃)	—	—	—	—	
		at operation limit temperature	kW	2.5 (-10℃)	3.9 (-10℃)	4.1 (-10℃)	5.3 (-10℃)	4.5 (-15℃)	4.5 (-15℃)	—	—	—	—	
	Back Up Heating Capacity		kW	0.3	0.5	0.5	0.7	2.0	2.0	—	—	—	—	
Operating Current (max)	Annual Electricity Consumption*2	kWh/a	980	1466	1569	2153	2793	2793	—	—	—	—		
	SCOP*4		4.0	4.2	4.0	3.9	4.0	4.0	—	—	—	—		
		Energy Efficiency Class		A+	A+	A+	A	A+	A+	—	—	—		
	Input (Cooling / Heating) Rated	kW	0.09(0.07) / 0.07	0.11(0.09) / 0.09	0.12(0.10) / 0.10	0.17(0.15) / 0.15	0.25(0.23) / 0.23	0.25(0.23) / 0.23	0.36(0.34) / 0.34	0.36(0.34) / 0.34	0.39(0.37) / 0.37	0.39(0.37) / 0.37		
	Operating Current (max)	A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	2.78		
Indoor Unit	Dimensions <Panel>	H × W × D	mm	250-900-732			250-1100-732		250-1400-732			250-1600-732		
	Weight <Panel>		kg	27 (26)			30 (29)		39 (38)			44 (43)		
	Air Volume [Lo-Mid-Hi]		m³/min	100 (120-140)			12.0 (14.5-17.0)		14.5-18.0-21.0			17.5-21.0-25.0		
	External Static Pressure		Pa	35 / 50 / 70 / 100 / 150										
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	23 - 27 - 30			26 - 31 - 35		25 - 29 - 33		26 - 30 - 34		29 - 34 - 38	
	Sound Level (PWL)		dB(A)	54			59		55		58		62	
				54			59		55		58		62	
				54			59		55		58		62	
				54			59		55		58		62	
Outdoor Unit	Dimensions	H × W × D	mm	550-800-285			880-840-330			981-1050-330				
	Weight		kg	35			54		50		53			
	Air Volume	Cooling	m³/min	36.3			44.6		40.9		50.1			
		Heating	m³/min	34.8			44.6		49.2		48.2			
	Sound Level (SPL)	Cooling	dB(A)	49			52		55		55			
		Heating	dB(A)	50			52		55		56			
	Sound Level (PWL)	Cooling	dB(A)	62			65		65		69			
		Heating	dB(A)	62			65		65		69			
	Operating Current (max)		A	8.2			12.0		14.0		16.1			
	Breaker Size		A	10			20		20		32			
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52			6.35 / 12.7		6.35 / 15.88		9.52 / 15.88			
	Max. Length	Out-In	m	20			30		30		50			
	Max. Height	Out-In	m	12			30		30		50			
	Max. Height	Out-In	m	12			30		30		50			
Guaranteed Operating Range [Outdoor]			Cooling*3	℃	-10 ~ +46			-15 ~ +46		-15 ~ +46				
			Heating	℃	-10 ~ +24			-10 ~ +24		-15 ~ +21				

PEA SERIES

For elegance and style, the PEA Series compliments the room environment with an aesthetically pleasing ceiling installation and a vast line-up of performance functions. Long pipe work installation is supported, increasing freedom in the placement of indoor units.

R410A




PEA-RP200/250WKA



Flexible Duct Design Enables Use of High-pressure Static Fan

A flexible duct design and 150Pa external static high-pressure are incorporated. The increased variation in airflow options ensures operation that best matches virtually all room layouts.

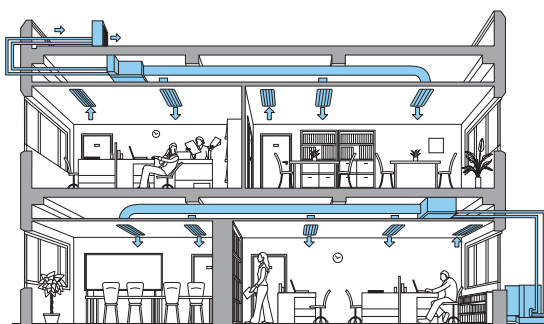

Long Refrigerant Piping Length


With the addition of more refrigerant, the maximum length for refrigerant piping has been increased to 100 metres. As a result, it is much easier to create the optimum layout for unit installation.

		Power Inverter Connection		Standard Inverter Connection	
		Max. Length	Max. Height	Max. Length	Max. Height
PEA-RP	200	100m	30m	70m	30m
	250	100m	30m	70m	30m


Wide-ranging Line-up from 20–25kW – Extensive Array of Choices to Match Building Size

[System Image]

PEA-RP200/250WKA

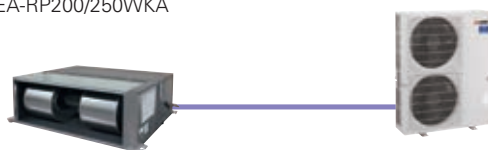


- For PEA-200, 250

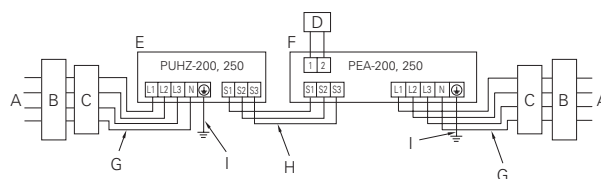

PAR-40MAA Group Control

The PAR-40MAA remote controller can control up to 16 systems* as a group, and is ideal for supporting the integrated management of building air conditioners.

- For PEA-200, 250

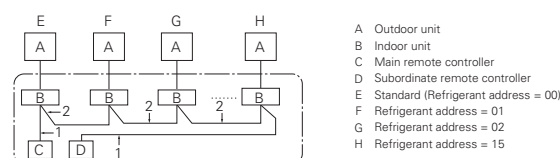


- A Outdoor unit
- B Indoor unit
- C Main remote controller
- D Subordinate remote controller
- E Standard (Refrigerant address = 00)
- F Refrigerant address = 01
- G Refrigerant address = 02
- H Refrigerant address = 15

LINE-UP

Indoor Unit

R410A



PEA-RP200/250WKA

Outdoor Unit

Power Inverter Series

R410A

PUHZ-ZRP200/250



Standard Inverter Series

R410A

PUHZ-P200/250



Remote Controller



Optional



Optional



Optional

PEA-RP SERIES

POWER INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PEA-RP200WKA	PEA-RP250WKA
Outdoor Unit				PUHZ-ZRP200YKA3	PUHZ-ZRP250YKA3
Refrigerant				R410A*1	
Power Supply Source				Outdoor power supply	
Outdoor (V/Phase/Hz)				400 / Three / 50	
Cooling	Capacity	Rated	kW	19.0	22.0
		Min - Max	kW	9.0 - 22.4	11.2 - 27.0
	Total Input	Rated	kW	6.03	8.05
	EER			3.15	2.73
	EEL Rank			-	-
Heating (Average Season)	Capacity	Rated	kW	22.4	27.0
		Min - Max	kW	9.5 - 25.0	12.5 - 31.0
	Total Input	Rated	kW	6.58	8.43
	COP			3.40	3.20
	EEL Rank			-	-
Operating Current (max)				23.3	26.5
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.66	0.80
		Operating Current (max)	A	4.3	5.5
	Dimensions	H x W x D	mm	470 - 1370 - 1120	
	Weight		kg	108	
	Air Volume [Lo-Hi]		m³/min	50 - 61 - 72	58 - 71 - 84
	External Static Pressure		Pa	(60) / (75) / (100) / 150	
	Sound Level (SPL) [Lo-Hi]		dB(A)	38 - 41 - 44	40 - 43 - 46
	Sound Level (PWL)		dB(A)	65 - 66 - 67	70 - 71 - 72
	Dimensions	H x W x D	mm	1338 - 1050 - 330 (+40)	
	Weight		kg	135	135
Outdoor Unit	Air Volume	Cooling	m³/min	140	140
		Heating	m³/min	140	140
	Sound Level (SPL)	Cooling	dB(A)	59	59
		Heating	dB(A)	62	62
	Sound Level (PWL)	Cooling	dB(A)	77	77
		Heating	dB(A)	77	77
	Operating Current (max)		A	19.0	21.0
	Breaker Size		A	32	32
	Diameter	Liquid / Gas	mm	9.52 / 25.4	12.7 / 25.4
	Max. Length	Out-In	m	100	100
Ext. Piping	Max. Height	Out-In	m	30	30
	Guaranteed Operating Range	Cooling*2	°C	-15 ~ +46	-15 ~ +46
[Outdoor Heating]				°C	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Optional air protection guide is required where ambient temperature is lower than -5°C.

PEA-RP SERIES

STANDARD INVERTER



Type				Inverter Heat Pump	
Indoor Unit				PEA-RP200WKA	PEA-RP250WKA
Outdoor Unit				PUHZ-P200YKA3	PUHZ-P250YKA3
Refrigerant				R410A*1	
Power Supply Source				Outdoor power supply	
Outdoor (V/Phase/Hz)				400 / Three / 50	
Cooling	Capacity	Rated	kW	19.0	22.0
		Min - Max	kW	9.0 - 22.4	11.2 - 27.0
	Total Input	Rated	kW	6.29	8.14
	EER			3.02	2.70
	EEL Rank			-	-
Heating (Average Season)	Capacity	Rated	kW	22.4	27.0
		Min - Max	kW	9.5 - 25.0	12.5 - 31.0
	Total Input	Rated	kW	6.78	8.70
	COP			3.30	3.10
	EEL Rank			-	-
Operating Current (max)				23.3	26.5
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.66	0.80
		Operating Current (max)	A	4.3	5.5
	Dimensions	H x W x D	mm	470 - 1370 - 1120	
	Weight		kg	108	
	Air Volume [Lo-Hi]		m³/min	50 - 61 - 72	58 - 71 - 84
	External Static Pressure		Pa	(60) / (75) / (100) / 150	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	38 - 41 - 44	40 - 43 - 46
	Sound Level (PWL)		dB(A)	65 - 66 - 67	70 - 71 - 72
	Dimensions	H x W x D	mm	1338 - 1050 - 330 (+40)	
	Weight		kg	127	135
Outdoor Unit	Air Volume	Cooling	m³/min	140	140
		Heating	m³/min	140	140
	Sound Level (SPL)	Cooling	dB(A)	58	59
		Heating	dB(A)	60	62
	Sound Level (PWL)	Cooling	dB(A)	78	77
		Heating	dB(A)	78	77
	Operating Current (max)		A	19.0	21.0
	Breaker Size		A	32	32
	Diameter	Liquid / Gas	mm	9.52 / 25.4	12.7/25.4
	Max. Length	Out-In	m	70	70
Ext. Piping	Max. Height	Out-In	m	30	30
	Guaranteed Operating Range	Cooling*2	°C	-15 ~ +46	-15 ~ +46
[Outdoor Heating]				°C	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Optional air protection guide is required where ambient temperature is lower than -5°C.

PKA SERIES

The compact, wall-mounted indoor units offer the convenience of simple installation, and a large product line-up (M35-M100 models) ensures a best-match solution. Designed for highly efficient energy savings, the PKA Series is the answer to your air conditioning needs.

PKA-M35/50HA(L)

R32
R410A



PKA-M60/71/100KA(L)

R32
R410A



Wired & Wireless Model

Wired models are newly added in P Series line-up. The diverse selection enables the base solution for both customer and location.



PKA-M HA



PKA-M KAL

Flat Panel & Pure White Finish

A flat panel layout has been adopted for all models. Pursuing a design that harmonizes with virtually any interior, the unit colour has been changed from white to pure white.



PKA-M HA(L)




PKA-M KA(L)




ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

Highly efficient indoor unit heat exchangers and newly designed power inverters (PUHZ-ZM) contribute to an amazing reduction in electricity consumption throughout a year, and have resulted in models in the full-capacity range attaining the rank A, A+ and A++ energy savings rating.

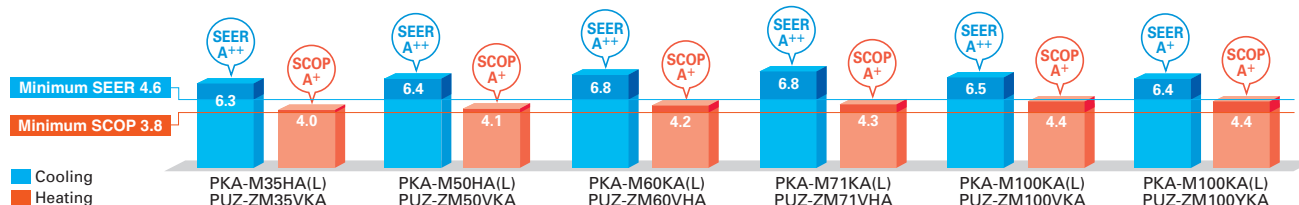

Drain Pump Option Available with All Models

Installation of the drain pump enables a drain outlet as high as 800mm above the base of the indoor unit. Drain water can be discharged easily even if the surface where the wall-mounted unit does not have direct access outside, increasing the degree of freedom for installation.

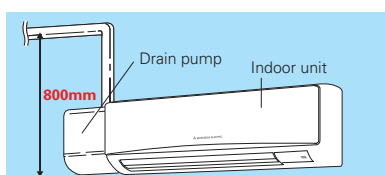

Multi-function Wired Remote Controller

In addition to using the wireless remote controller that comes as standard equipment, PAR-40MAA and PAC-YT52CRA wired remote controllers can be used as well.

* Connection to PAR-40MAA/PAC-YT52CRA requires PAC-SH29TC-E (optional).

Main Functions

- Night Setback
- Energy-saving Mode
- Multi Language
- Weekly Timer
- Refrigerant Leak Check

* For details, please refer to page 183.



SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50HA(L)

R32
R410A



PKA-M60/71/100KA(L)

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional (*)



Optional



Optional (*)



(*) PAC-SH29TC-E is required (optional)

PKA-M HA(L)/KA(L) Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	—	—	—	—	35x2	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E				MSDD-50WR2-E	—	MSDT-111R3-E			MSDF-1111R2-E	

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PKA-M35/50HA(L)



PKA-M60/71/100KA(L)

Outdoor Unit

R32

For Single



PUZ-M100

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional (*)



Optional



Optional (*)



(*) PAC-SH29TC-E is required (optional)

PKA-M HA/KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P)		—	—	—	—	100x1	—	—	—	—	—	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-F	—	MSDT-111R3-E			MSDF-1111B2-E	

PKA-M SERIES

POWER INVERTER



Type			Inverter Heat Pump					
Indoor Unit			PKA-M35HA(L)	PKA-M50HA(L)	PKA-M60KA(L)	PKA-M71KA(L)	PKA-M100KA(L)	
Outdoor Unit			PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VKA	PUZ-ZM71VKA	PUZ-ZM100VKA	PUZ-ZM100YKA
Refrigerant			R32*1					
Power Supply			Outdoor power supply					
Source			VKA • VHA:230 / Single / 50, YKA:400 / Three / 50					
Cooling	Capacity	Rated	kW	3.6	4.6	6.1	7.1	9.5
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4
	Total Input	Rated	kW	0.869	1.239	1.560	1.863	2.405
	EER			4.14	3.71	3.91	3.81	3.95
	EEL Rank			—	—	—	—	—
	Design Load		kW	3.6	4.6	6.1	7.1	9.5
	Annual Electricity Consumption*2		kWh/a	200	251	313	364	508
	SEER			6.3	6.4	6.8	6.8	6.5
	Energy Efficiency Class			A++	A++	A++	A++	A++
	Capacity	Rated	kW	4.1	5.0	7.0	8.0	11.2
Heating (Average Season)	Total Input	Rated	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0
		Rated	kW	1.040	1.347	1.732	2.116	3.102
	COP			3.94	3.71	4.04	3.78	3.61
	EEL Rank			—	—	—	—	—
	Design Load		kW	2.4	3.3	4.4	4.7	7.8
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)	3.2 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)
	Back Up Heating Capacity		kW	0	0	0	0	0
	Annual Electricity Consumption*2		kWh/a	839	1115	1460	1523	2472
	SCOP			4.0	4.1	4.2	4.3	4.4
Energy Efficiency Class				A+	A+	A+	A+	A+
Operating Current (max)			A	13.4	13.4	19.4	19.4	27.1
Indoor Unit	Input	Rated	kW	0.04 / 0.03	0.04 / 0.03	0.06 / 0.05	0.06 / 0.05	0.08 / 0.07
		Rated	A	0.40	0.40	0.43	0.43	0.57
	Operating Current (max)		A	0.40	0.40	0.43	0.43	0.57
	Dimensions <Panel>		H × W × D	mm	295 - 898 - 249	365 - 1170 - 295	365 - 1170 - 295	365 - 1170 - 295
	Weight <Panel>		kg	13	13	21	21	21
	Air Volume <Lo-Mid-Hi>		m³/min	9 - 10.5 - 12	9 - 10.5 - 12	18 - 20 - 22	18 - 20 - 22	20 - 23 - 26
	Sound Level (SPL) <Lo-Mid-Hi>		dB(A)	36 - 40 - 43	36 - 40 - 43	39 - 42 - 45	39 - 42 - 45	41 - 45 - 49
	Sound Level (PWL)		dB(A)	60	60	64	64	65
	Dimensions		H × W × D	mm	630 - 809 - 300	943 - 950 - 330 (+25)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)
	Weight		kg	46	46	70	70	123
Outdoor Unit	Air Volume	Cooling	m³/min	45	45	55	55	110
		Heating	m³/min	45	45	55	55	110
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49
		Heating	dB(A)	46	46	49	49	51
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69
		Heating	dB(A)	65	65	67	67	69
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5
	Breaker Size		A	16	16	25	25	32
	Diameter		mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length		m	50	50	55	55	100
Ext. Piping	Max. Height	Out-In	m	30	30	30	30	30
		Out-In	m	30	30	30	30	30
	Guaranteed Operating Range	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PKA-M SERIES

STANDARD INVERTER



Type				Inverter Heat Pump			
Indoor Unit				PKA-M100KA(L)			
Outdoor Unit				PUZ-M100VKA		PUZ-M100YKA	
Refrigerant				R32*1			
Power Supply				Outdoor power supply			
Source Outdoor (V/Phase/Hz)				230 / Single / 50		400 / Three /50	
Cooling	Capacity	Rated	kW	9.5		9.5	
		Min - Max	kW	4.0 - 10.6		4.0 - 10.6	
	Total Input	Rated	kW	2.94		2.94	
	EER			3.23		3.23	
	EEL Rank			-		-	
	Design Load		kW	9.5		9.5	
	Annual Electricity Consumption*2		kWh/a	572		572	
	SEER			5.8		5.8	
	Energy Efficiency Class			A+		A+	
	Heating (Average Season)	Capacity	Rated	kW	11.2		11.2
Min - Max			kW	2.8 - 12.5		2.8 - 12.5	
Total Input		Rated	kW	3.28		3.28	
COP				3.41		3.41	
EEL Rank			-		-		
Design Load			kW	8.0		8.0	
Declared Capacity		at reference design temperature	kW	6.0 (-10°C)		6.0 (-10°C)	
		at bivalent temperature	kW	7.0 (-7°C)		7.0 (-7°C)	
		at operation limit temperature	kW	4.5 (-15°C)		4.5 (-15°C)	
Back Up Heating Capacity			kW	2.0		2.0	
Annual Electricity Consumption*2			kWh/a	2797		2797	
SCOP				4.0		4.0	
Energy Efficiency Class			A+		A+		
Operating Current (max)				A		20.6	
Indoor Unit	Input	Rated	kW	0.08		12.1	
			A	0.08		0.08	
	Operating Current (max)		A	0.57		0.57	
	Dimensions <Panel>		H × W × D	mm		365 - 1170 - 295	
	Weight <Panel>		kg	21		21	
	Air Volume [Lo-Mid-Hi]		m³/min	20 - 23 - 26		20 - 23 - 26	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	41 - 45 - 49		41 - 45 - 49	
	Sound Level (PWL)		dB(A)	65		65	
	Dimensions		H × W × D	mm		981 - 1050 - 330 (+40)	
	Outdoor Unit	Weight		kg	76		78
Air Volume			Cooling	m³/min	79.0		79.0
		Heating	m³/min	79.0		79.0	
Sound Level (SPL)		Cooling	dB(A)	51		51	
		Heating	dB(A)	54		54	
Sound Level (PWL)		Cooling	dB(A)	70		70	
		Heating	dB(A)	70		70	
Operating Current (max)		A	20.0		11.5		
Breaker Size		A	32		16		
Ext. Piping		Diameter		Liquid / Gas	mm		9.52 / 15.88
	Max. Length	Out-In	m	55		55	
		Out-In	m	30		30	
	Max. Height						
Guaranteed Operating Range [Outdoor]				Cooling*3	°C	-15 ~ +46	
				Heating	°C	-15 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32

R410A



PKA-M35/50HA(L)



PKA-M60/71/100KA(L)

Outdoor Unit

R410A

For Single



PUAZ-ZRP35/50



PUAZ-ZRP60/71



PUAZ-ZRP100

R410A

For Multi
(Twin/Triple/Quadruple)



PUAZ-ZRP71



PUAZ-ZRP100/125/140/200/250

Remote Controller



Optional (*)



Optional



Optional (*)



Standard Inverter Series



Indoor Unit

R32

R410A



PKA-M35/50HA(L)



PKA-M60/71/100KA(L)

Outdoor Unit

R410A

For Single



PUAZ-P100

R410A

For Multi
(Twin/Triple/Quadruple)



PUAZ-P100/125/140



PUAZ-P200/250

Remote Controller



Optional (*)



Optional



Optional (*)



(*) PAC-SH29TC-E is required (optional)

PKA-M HA/KA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																				
		For Single									For Twin						For Triple			For Quadruple		
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250	
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	—	—	—	—	35x2	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4	
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E	—	MSDT-111R-E			MSDF-1111R-E		
Standard Inverter (PUHZ-P)		—	—	—	—	100x1	—	—	—	—	—	50x2	60x2	71x2	100x2	—	50x3	60x3	71x3	50x4	60x4	
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E				MSDD-50WR-E	—	MSDT-111R-E			MSDF-1111R-E	

PKA-M SERIES

POWER INVERTER



Type			Inverter Heat Pump					
Indoor Unit			PKA-M35HA(L)	PKA-M50HA(L)	PKA-M60KA(L)	PKA-M71KA(L)	PKA-M100KA(L)	
Outdoor Unit			PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3
Refrigerant			R410A*1					
Power Supply			Outdoor power supply					
Source			VKA • VHA:230 / Single / 50, YKA:400 / Three / 50					
Outdoor (V/Phase/Hz)								
Cooling	Capacity	Rated	kW	3.6	4.6	6.1	7.1	9.5
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4
	Total Input	Rated	kW	0.94	1.41	1.60	1.80	2.40
	EER			3.83	3.26	3.81	3.94	3.96
	EEL Rank			-	-	-	-	-
	Design Load		kW	3.6	4.6	6.1	7.1	9.5
	Annual Electricity Consumption*2		kWh/a	214	296	324	368	533
	SEER			5.9	5.4	6.5	6.7	6.2
	Energy Efficiency Class			A+	A	A++	A++	A++
	Capacity	Rated	kW	4.1	5.0	7.0	8.0	11.2
Heating (Average Season)		Min - Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0
	Total Input	Rated	kW	1.07	1.50	1.96	2.19	3.04
	COP			3.83	3.33	3.57	3.65	3.68
	EEL Rank			-	-	-	-	-
	Design Load		kW	2.4	3.3	4.4	4.7	7.8
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)	3.3 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)	3.2 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)
	Back Up Heating Capacity		kW	0	0	0	0	0
	Annual Electricity Consumption*2		kWh/a	847	1160	1473	1532	2608
Operating Current (max)	SCOP			3.9	4.0	4.2	4.3	4.1
	Energy Efficiency Class			A	A+	A+	A+	A+
	Input	Rated	kW	13.4	13.4	19.4	19.4	27.1
	Operating Current (max)		A	0.04	0.04	0.06	0.06	0.08
	Dimensions <Panel>	H x W x D	mm	295 - 898 - 249	13	21	365 - 1170 - 295	21
	Weight <Panel>		kg	13	13	21	21	21
	Air Volume [Lo-Mid-Hi]		m³/min	9 - 10.5 - 12	9 - 10.5 - 12	18 - 20 - 22	18 - 20 - 22	20 - 23 - 26
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	36 - 40 - 43	36 - 40 - 43	39 - 42 - 45	39 - 42 - 45	41 - 45 - 49
	Sound Level (PWL)		dB(A)	60	60	64	64	65
	Dimensions	H x W x D	mm	630 - 809 - 300	46	70	943 - 950 - 330 (+30)	70
Outdoor Unit	Weight		kg	43	46	70	70	116
	Air Volume	Cooling	m³/min	45	45	55	55	110
		Heating	m³/min	45	45	55	55	110
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49
		Heating	dB(A)	46	46	48	48	51
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5
	Breaker Size		A	16	16	25	25	32
	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	50	50	50	50	75
Ext. Piping	Max. Height	Out-In	m	30	30	30	30	30
	Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21


*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PKA-M SERIES

STANDARD INVERTER



Type			Inverter Heat Pump						
Indoor Unit			PKA-M100KA(L)						
Outdoor Unit			PUHZ-P100VKA			PUHZ-P100YKA			
Refrigerant			R410A*1						
Power Supply			Outdoor (V/Phase/Hz)			Outdoor power supply			
Cooling	Capacity		Rated	kW		230 / Single / 50		400 / Three / 50	
			Min - Max	kW		9.4		9.4	
	Total Input		Rated	kW		3.7 - 10.6		3.7 - 10.6	
						3.12		3.12	
	EER					3.01		3.01	
	EEL Rank					-		-	
	Design Load			kW		9.4		9.4	
	Annual Electricity Consumption*2		kWh/a			586		586	
	SEER					5.6		5.6	
	Energy Efficiency Class					A+		A+	
Heating (Average Season)	Capacity		Rated	kW		11.2		11.2	
			Min - Max	kW		2.8 - 12.5		2.8 - 12.5	
	Total Input		Rated	kW		3.48		3.48	
						3.21		3.21	
	COP					-		-	
	EEL Rank					8.0		8.0	
	Design Load			kW		6.0 (-10°C)		6.0 (-10°C)	
	Declared Capacity		at reference design temperature	kW		7.0 (-7°C)		7.0 (-7°C)	
			at bivalent temperature	kW		4.5 (-15°C)		4.5 (-15°C)	
			at operation limit temperature	kW		2.0		2.0	
	Back Up Heating Capacity			kW		2.0		2.0	
	Annual Electricity Consumption*2		kWh/a			2795		2795	
	SCOP					4.0		4.0	
	Energy Efficiency Class					A+		A+	
Operating Current (max)				A		20.6		12.1	
Indoor Unit	Input		Rated	kW		0.08		0.08	
	Operating Current (max)			A		0.57		0.57	
	Dimensions <Panel>		H x W x D	mm		365 - 1170 - 295			
	Weight <Panel>			kg		21		21	
	Air Volume [Lo-Mid-Hi]			m³/min		20 - 23 - 26		20 - 23 - 26	
	Sound Level (SPL) [Lo-Mid-Hi]			dB(A)		41 - 45 - 49		41 - 45 - 49	
	Sound Level (PWL)			dB(A)		65		65	
	Dimensions		H x W x D	mm		981 - 1050 - 330			
	Weight			kg		76		78	
Outdoor Unit	Air Volume		Cooling	m³/min		79		79	
			Heating	m³/min		79		79	
	Sound Level (SPL)		Cooling	dB(A)		51		51	
			Heating	dB(A)		54		54	
	Sound Level (PWL)		Cooling	dB(A)		70		70	
	Operating Current (max)			A		20.0		11.5	
	Breaker Size			A		32		16	
	Diameter		Liquid / Gas	mm		9.52 / 15.88		9.52 / 15.88	
	Max. Length		Out-In	m		50		50	
Ext. Piping	Max. Height		Out-In	m		30		30	
	Guaranteed Operating Range [Outdoor]		Cooling*3	°C		-15 ~ +46		-15 ~ +46	
			Heating	°C		-15 ~ +21		-15 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PCA-KA SERIES

R32
R410A

PCA-M35/50/60/71/100/125/140KA

A stylish new indoor unit design and airflow settings for both high- and low-ceiling interiors expand installation possibilities. Together with exceptional energy-saving performance, these units are the solution to diversified air conditioning needs.



Stylish Indoor Unit Design


A stylish square-like design is adopted for the indoor units of all models. As a result, the units blend in better with the ceiling.



PCA-KA


ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A, A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of newly designed Power Inverter series (PUHZ-ZM) and resulting in the full capacity models comply ErP Lot 10 with energy ranking A+/A++ for cooling and A/A+ for heating. This contribute to an impressive reduction in the cost of annual electricity.

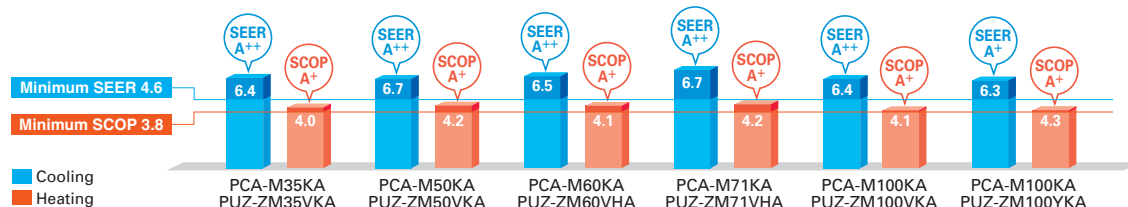


Optional Drain Pump for Full-capacity Models

The pumping height of the optional drain pump has been increased from 400mm to 600mm, expanding flexibility in choosing unit location during installation work.




Outside-air Intake

Units are equipped with a knock-out hole that enables the induction of fresh outside-air.

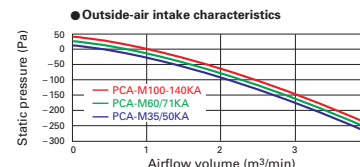

Equipped with Automatic Air-speed Adjustment

In addition to the conventional 4-speed setting, units are now equipped with an automatic air-speed adjustment mode. This setting automatically adjusts the air-speed to conditions that match the room environment. At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for stable comfortable heating/cooling operation.

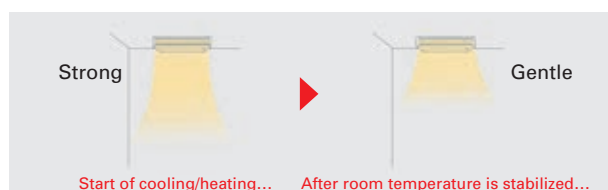

Equipped with High- /Low-ceiling Modes

Units are equipped with high- and low-ceiling operation modes that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimize the breezy sensation felt throughout the room.

Capacity	High ceiling	Standard ceiling	Low ceiling
35	3.5m	2.7m	2.5m
50	3.5m	2.7m	2.5m
60	3.5m	2.7m	2.5m
71	3.5m	2.7m	2.5m
100	4.2m	3.0m	2.6m
125	4.2m	3.0m	2.6m
140	4.2m	3.0m	2.6m

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional

PCZ-M KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-111R2-E		

SERIES SELECTION

Standard Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA

Outdoor Unit

R32

For Single



SUZ-M35



SUZ-M50



SUZ-M60/71



PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional



Optional



Optional



Optional

PCZ-M KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P&SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-111R2-E	

PCA-M KA SERIES

POWER INVERTER



Type			Inverter Heat Pump											
Indoor Unit			PCA-M35KA	PCA-M50KA	PCA-M60KA	PCA-M71KA	PCA-M100KA		PCA-M125KA		PCA-M140KA			
Outdoor Unit			PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VHA	PUZ-ZM71VHA	PUZ-ZM100VKA	PUZ-ZM100YKA	PUZ-ZM125VKA	PUZ-ZM125YKA	PUZ-ZM140VKA	PUZ-ZM140YKA		
Refrigerant			R32*1											
Power Supply			Outdoor power supply VKA - VHA:230 / Single / 50, YKA:400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	13.4	13.4		
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0	
	Total Input		Rated	kW	0.829	1.250	1.521	1.829	2.317	2.317	3.846	3.941	3.941	
	EER			4.34	4.00	4.01	3.88	4.10	4.10	3.25	3.25	3.40	3.40	
	EEL Rank			-	-	-	-	-	-	-	-	-	-	
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	-	-	-	-	
	Annual Electricity Consumption*2		kWh/a	197	260	328	371	513	513	-	-	-	-	
	SEER			6.4	6.7	6.5	6.7	6.4	6.3	-	-	-	-	
	Energy Efficiency Class			A++	A++	A++	A++	A++	A++	-	-	-	-	
	Heating (Average Season)	Capacity	Rated	kW	4.1	5.5	7.0	8.0	11.2	11.2	14.0	16.0	16.0	
Min - Max			kW	1.6-5.2	2.5 - 6.6	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0	
Total Input		Rated	kW	1.019	1.361	1.745	2.156	3.018	3.018	3.954	3.954	4.432	4.432	
COP			4.02	4.04	4.01	3.71	3.71	3.71	3.54	3.54	3.61	3.61		
EEL Rank			-	-	-	-	-	-	-	-	-	-		
Design Load		kW	2.4	3.8	4.4	4.7	7.8	7.8	-	-	-	-		
Declared Capacity		at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	-	-	-	
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	-	-	-	
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	2.8 (-20°C)	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	-	-	-	-	
Back Up Heating Capacity		kW	0	0	0	0	0	0	-	-	-	-		
Annual Electricity Consumption*2		kWh/a	839	1265	1499	1563	2539	2539	-	-	-	-		
SCOP			4.0	4.2	4.1	4.2	4.3	4.3	-	-	-	-		
Energy Efficiency Class			A+	A+	A+	A+	A+	A+	-	-	-	-		
Operating Current (max)			A	13.3	13.4	19.4	19.4	27.2	27.2	27.3	10.3	28.9	13.9	
Indoor Unit	Input	Rated	kW	0.04	0.05	0.06	0.06	0.09	0.09	0.11	0.11	0.14	0.14	
		Operating Current (max)	A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90	
	Dimensions <Panel>		H x W x D	mm	230 - 960 - 680	230 - 1280 - 680	32	37	37	230 - 1600 - 680	38	40	40	
	Weight <Panel>		kg	25	26	32	32	37	37	38	38	40	40	
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32	24-26-29-32	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48	41-43-45-48	
	Sound Level (PWL)		dB(A)	60	60	62	62	63	63	65	65	68	68	
	Dimensions		H x W x D	mm	630 - 809 - 300	943 - 950 - 330 (+25)	116	123	116	1338 - 1050 - 330 (+40)	116	118	131	
	Weight	Cooling	kg	46	46	70	70	116	123	116	123	118	131	
		Heating	kg	45	45	55	55	110	110	120	120	120	120	
Outdoor Unit	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120	
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120	
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50	
		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52	
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70	
		Heating	dB(A)	65	65	67	67	69	69	70	70	70	70	
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	26.5	26.5	9.5	28.0	13.0	
	Breaker Size		A	16	16	25	25	32	32	32	16	40	16	
	Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
			Max. Length	m	50	50	55	55	100	100	100	100	100	100
Max. Height		Out-In	m	30	30	30	30	30	30	30	30	30	30	
		Out-In	m	30	30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]			Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
			Heating	°C	-11 ~ +21	-11 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.



Type			Inverter Heat Pump											
Indoor Unit			PCA-M35KA	PCA-M50KA	PCA-M60KA	PCA-M71KA	PCA-M100KA		PCA-M125KA		PCA-M140KA			
Outdoor Unit			SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA	PUZ-M100YKA	PUZ-M125VKA	PUZ-M125YKA	PUZ-M140VKA	PUZ-M140YKA		
Refrigerant			R32 ^{*1}											
Power Supply			Outdoor power supply VA ~ VKA:230 / Single / 50, YKA:400 / Three / 50											
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4	
		Min - Max	kW	0.8 ~ 3.9	1.5 ~ 5.6	1.6 ~ 6.3	2.2 ~ 8.1	4.0 ~ 10.6	4.0 ~ 10.6	5.7 ~ 13.0	5.7 ~ 13.0	5.7 ~ 14.1	5.7 ~ 14.1	
	Total Input		Rated	kW	0.90	1.51	1.64	1.97	2.94	2.94	4.01	4.01	5.36	5.36
	EER			4.00	3.30	3.70	3.60	3.23	3.23	3.01	3.01	2.50	2.50	
	EEL Rank			—	—	—	—	—	—	—	—	—	—	
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4	
	Annual Electricity Consumption ^{*2}		kWh/a	198	291	333	381	552	552	—	—	—	—	
	SEER			6.3	6.0	6.4	6.5	6.0	6.0	—	—	—	—	
	Energy Efficiency Class			A++	A+	A++	A++	A+	A+	—	—	—	—	
	Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
Min - Max			kW	1.0 ~ 5.0	1.5 ~ 7.2	1.6 ~ 8.0	2.0 ~ 10.2	2.8 ~ 12.5	2.8 ~ 12.5	4.1 ~ 15.0	4.1 ~ 15.0	4.2 ~ 15.8	4.2 ~ 15.8	
Total Input		Rated	kW	1.02	1.61	1.75	2.21	3.28	3.28	3.95	3.95	4.28	4.28	
COP			4.00	3.71	4.00	3.61	3.41	3.41	3.41	3.41	3.50	3.50		
EEL Rank			—	—	—	—	—	—	—	—	—	—		
Design Load		kW	2.6	4.3	4.6	5.8	8.0	8.0	8.5	8.5	9.4	9.4		
Declared Capacity		at reference design temperature	kW	2.3 (–10°C)	3.8 (–10°C)	4.1 (–10°C)	5.2 (–10°C)	6.0 (–10°C)	6.0 (–10°C)	8.5 (–10°C)	8.5 (–10°C)	9.4 (–10°C)	9.4 (–10°C)	
		at bivalent temperature	kW	2.3 (–7°C)	3.8 (–7°C)	4.1 (–7°C)	5.2 (–7°C)	7.0 (–7°C)	7.0 (–7°C)	8.5 (–10°C)	8.5 (–10°C)	9.4 (–10°C)	9.4 (–10°C)	
		at operation limit temperature	kW	2.3 (–10°C)	3.8 (–10°C)	4.1 (–10°C)	5.2 (–10°C)	4.5 (–15°C)	4.5 (–15°C)	6.0 (–15°C)	6.0 (–15°C)	7.0 (–15°C)	7.0 (–15°C)	
Back Up Heating Capacity		kW	0.3	0.5	0.5	0.6	2.0	2.0	—	—	—	—		
Annual Electricity Consumption ^{*2}		kWh/a	909	1456	1555	1971	2719	2719	—	—	—	—		
SCOP			4.0	4.1	4.1	4.1	4.1	4.1	—	—	—	—		
Energy Efficiency Class			A+	A+	A+	A+	A+	A+	—	—	—	—		
Operating Current (max)			A	8.8	13.9	15.2	15.2	20.7	12.2	27.3	12.3	30.9	12.4	
Indoor Unit	Input	Rated	kW	0.04	0.05	0.06	0.06	0.09	0.09	0.11	0.11	0.14	0.14	
		Operating Current (max)	A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90	0.90	
	Dimensions <Panel>		H x W x D	mm	230 - 960 - 680	230 - 1280 - 680	32	37	37	230 - 1600 - 680	38	40	40	
	Weight <Panel>		kg	25	26	32	32	37	37	38	38	40	40	
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32	24-26-29-32	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48	41-43-45-48	
	Sound Level (PWL)		dB(A)	60	60	60	62	63	63	65	65	68	68	
	Dimensions		H x W x D	mm	550 - 800 - 285	714 - 800 - 285	890 - 840 - 330	76	78	981 - 1050 - 330 (+40)	84	85	85	
	Weight		kg	35	41	54	54	71	71	84	85	84	85	
	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79.0	79.0	86.0	86.0	86.0	86.0	
Heating		m³/min	32.7	43.7	50.1	50.1	79.0	79.0	92.0	92.0	92.0	92.0		
Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55		
	Heating	dB(A)	48	49	51	51	54	54	56	56	57	57		
Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73		
	Heating	dB(A)	58	63	64	65	69	69	71	71	72	72		
Operating Current (max)			A	8.5	13.5	14.8	14.8	20.0	11.5	26.5	11.5	30.0	11.5	
Breaker Size			A	10	20	20	20	32	16	32	16	40	16	
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	20	30	30	30	50	50	65	65	65	65	
	Max. Height	Out-In	m	12	30	30	30	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]			Cooling ^{*3}	°C	–10 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	
			Heating	°C	–10 ~ +24	–10 ~ +24	–10 ~ +24	–15 ~ +21	–15 ~ +21	–15 ~ +21	–15 ~ +21	–15 ~ +21	–15 ~ +21	

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA

Outdoor Unit

R410A

For Single



R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-ZRP100/125/140/200/250

Remote Controller



Optional Optional Optional Optional

Standard Inverter Series



Indoor Unit

R32
R410A



PCA-M35/50/60/71/100/125/140KA

Outdoor Unit

R410A

For Single



R410A

For Multi
(Twin/Triple/Quadruple)



PUHZ-P100/125/140 PUHZ-P200/250

Remote Controller



Optional Optional Optional Optional

PCA-M KA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single										For Twin					For Triple			For Quadruple	
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E					MSDD-50WR-E			MSDT-111R-E	
Standard Inverter (PUHZ-P&SUZ)	35x1	50x1	60x1	71x1	100x1	125x1	140x1	—	—	—	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
Distribution Pipe	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E					MSDD-50WR-E			MSDT-111R-E	

PCA-M KA SERIES

POWER INVERTER



Type			Inverter Heat Pump									
Indoor Unit			PCA-M35KA	PCA-M50KA	PCA-M60KA	PCA-M71KA	PCA-M100KA		PCA-M125KA		PCA-M140KA	
Outdoor Unit			PUHZ-ZRP35VKA2	PUHZ-ZRP50VKA2	PUHZ-ZRP60VHA2	PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP125YKA3	PUHZ-ZRP140VKA3	PUHZ-ZRP140YKA3
Refrigerant			R410A*1									
Power Supply			Outdoor power supply VKA · VHA 230 / Single / 50, YKA 400 / Three / 50									
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0
	Total Input	Rated	kW	0.86	1.34	1.66	1.82	2.42	2.42	3.98	3.98	3.95
	EER			4.19	3.73	3.67	3.90	3.93	3.93	3.14	3.14	3.39
		EEL Rank		-	-	-	-	-	-	-	-	-
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	-	-	-
	Annual Electricity Consumption*2		kWh/a	202	283	340	367	542	553	-	-	-
	SEER			6.2	6.1	6.2	6.7	6.1	6.0	-	-	-
		Energy Efficiency Class		A++	A++	A++	A++	A++	A+	-	-	-
	Capacity	Rated	kW	4.1	5.5	7.0	8.0	11.2	11.2	14.0	14.0	16.0
Heating (Average Season)		Min - Max	kW	1.6 - 5.2	2.5 - 6.6	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0
	Total Input	Rated	kW	1.02	1.45	1.93	2.20	3.04	3.04	3.80	3.80	4.57
	COP			4.02	3.79	3.63	3.64	3.68	3.68	3.68	3.68	3.50
		EEL Rank		-	-	-	-	-	-	-	-	-
	Design Load		kW	2.4	3.8	4.4	4.7	7.8	7.8	-	-	-
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	-	-
		at bivalent temperature	kW	2.4 (-10°C)	3.8 (-10°C)	4.4 (-10°C)	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	-	-	-
		at operation limit temperature	kW	2.2 (-11°C)	3.7 (-11°C)	4.4 (-11°C)	4.7 (-11°C)	7.8 (-11°C)	7.8 (-11°C)	-	-	-
	Back Up Heating Capacity		kW	0	0	0	0	0	0	-	-	-
	Annual Electricity Consumption*2		kWh/a	815	1257	1458	1519	2837	2837	-	-	-
Operating Current (max)		SCOP		4.1	4.2	4.3	4.3	3.9	3.9	-	-	-
		Energy Efficiency Class		A+	A+	A+	A+	A	A	-	-	-
	Input	Rated	A	13.3	13.4	19.4	19.4	27.2	27.2	27.3	27.3	28.9
	Operating Current (max)		A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90
	Dimensions <Panel>	H × W × D	mm	230 - 960 - 680	230 - 960 - 680	230 - 1280 - 680	230 - 1280 - 680	230 - 1600 - 680	230 - 1600 - 680	230 - 1600 - 680	230 - 1600 - 680	230 - 1600 - 680
	Weight <Panel>		kg	25	26	32	32	37	37	38	38	40
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48
	Sound Level (PWL)		dB(A)	60	60	60	62	63	63	65	65	68
	Dimensions	H × W × D	mm	630 - 809 - 300	630 - 809 - 300	943 - 950 - 330 (+30)	943 - 950 - 330 (+30)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)	1338 - 1050 - 330 (+40)
Outdoor Unit	Weight		kg	43	46	70	70	116	123	116	125	118
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50
		Heating	dB(A)	46	46	48	48	51	51	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70
		Heating	dB(A)	66	66	68	68	71	71	72	72	72
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	26.5	26.5	26.5	28.0
	Breaker Size		A	16	16	25	25	32	32	32	32	32
	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Ext. Piping	Max. Length	Out-In	m	50	50	50	50	75	75	75	75	75
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30
	Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-11 ~ +21	-11 ~ +21	-11 ~ +21	-11 ~ +21	-11 ~ +21	-11 ~ +21	-11 ~ +21	-11 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PCA-M KA SERIES

STANDARD INVERTER



Type			Inverter Heat Pump									
Indoor Unit			PCA-M35KA	PCA-M50KA	PCA-M60KA	PCA-M71KA	PCA-M100KA		PCA-M125KA		PCA-M140KA	
Outdoor Unit			SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6	PUHZ-P100YKA	PUHZ-P100YKA	PUHZ-P125YKA	PUHZ-P125YKA	PUHZ-P140YKA	PUHZ-P140YKA
Refrigerant			R410A*1									
Power Supply			Outdoor power supply VA · VKA 230 / Single / 50, YKA 400 / Three / 50									
Cooling	Capacity	Rated	kW	3.6	5.0	5.7	7.1	9.4	9.4	12.1	12.1	13.6
		Min - Max	kW	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 14.1
	Total Input	Rated	kW	1.050	1.550	1.720	2.060	3.05	3.05	4.24	4.24	5.62
	EER			3.43	3.23	3.31	3.45	3.08	3.08	2.85	2.85	2.41
		EEL Rank		-	-	-	-	-	-	-	-	-
	Design Load		kW	3.6	5.0	5.7	7.1	9.4	9.4	-	-	-
	Annual Electricity Consumption*2		kWh/a	209	296	325	409	586	586	-	-	-
	SEER			6.0	5.8	6.1	6.0	5.6	5.6	-	-	-
		Energy Efficiency Class		A+	A+	A++	A+	A+	A+	-	-	-
	Capacity	Rated	kW	4.1	5.5	6.9	7.9	11.2	11.2	13.5	13.5	15.0
Heating (Average Season)		Min - Max	kW	1.7 - 5.0	1.7 - 6.6	2.5 - 8.0	2.6 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8
	Total Input	Rated	kW	1.050	1.520	1.910	2.180	3.37	3.37	4.06	4.06	4.47
	COP			3.90	3.62	3.61	3.62	3.32	3.32	3.32	3.32	3.35
		EEL Rank		-	-	-	-	-	-	-	-	-
	Design Load		kW	2.6	4.0	4.8	5.8	8.0	8.0	-	-	-
	Declared Capacity	at reference design temperature	kW	2.3 (-10°C)	3.6 (-10°C)	4.0 (-10°C)	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	-	-	-
		at bivalent temperature	kW	2.3 (-7°C)	3.6 (-7°C)	4.3 (-7°C)	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	-	-	-
		at operation limit temperature	kW	2.3 (-10°C)	3.6 (-10°C)	4.0 (-10°C)	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	-	-	-
	Back Up Heating Capacity		kW	0.3	0.4	0.8	0.6	2.0	2.0	-	-	-
	Annual Electricity Consumption*2		kWh/a	887	1398	1678	2028	2726	2726	-	-	-
Operating Current (max)		SCOP		4.1	4.0	4.0	4.3	4.1	4.1	-	-	-
		Energy Efficiency Class		A+	A+	A+	A+	A+	A+	-	-	-
	Input	Rated	A	8.5	12.4	14.4	16.5	20.7	12.2	27.3	12.3	30.9
	Operating Current (max)		A	0.29	0.37	0.39	0.42	0.65	0.65	0.76	0.76	0.90
	Dimensions <Panel>	H × W × D	mm	230 - 960 - 680	230 - 960 - 680	230 - 1280 - 680	230 - 1280 - 680	230 - 1600 - 680	230 - 1600 - 680	230 - 1600 - 680	230 - 1600 - 680	230 - 1600 - 680
	Weight <Panel>		kg	25	26	32	32	37	37	38	38	40
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	10-11-12-14	10-11-13-15	15-16-17-19	16-17-18-20	22-24-26-28	22-24-26-28	23-25-27-29	23-25-27-29	24-26-29-32
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	31-33-36-39	32-34-37-40	33-35-37-40	35-37-39-41	37-39-41-43	37-39-41-43	39-41-43-45	39-41-43-45	41-43-45-48
	Sound Level (PWL)		dB(A)	60	60	60	62	63	63	65	65	68
	Dimensions	H × W × D	mm	550 - 800 - 285	550 - 800 - 285	880 - 840 - 330	880 - 840 - 330	981 - 1050 - 330	981 - 1050 - 330	981 - 1050 - 330	981 - 1050 - 330	981 - 1050 - 330
Outdoor Unit	Weight		kg	35	54	50	53	76	78	84	85	85
	Air Volume	Cooling	m³/min	36.3	44.6	40.9	50.1	79	79	86	86	86
		Heating	m³/min	34.8	44.6	49.2	48.2	79	79	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	49	52	55	55	51	51	54	54	56
		Heating	dB(A)	50	52	55	55	54	54	56	56	57
	Sound Level (PWL)	Cooling	dB(A)	62	65	65	69	70	70	72	72	75
		Heating	dB(A)	62	65	65	69	70	70	72	72	75
	Operating Current (max)		A	8.2	12.0	14.0	16.1	20.0	11.5	26.5	11.5	30.0
	Breaker Size		A	10	20	20	20	32	16	32	16	40
	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
Ext. Piping	Max. Length	Out-In	m	20	30	30	30	50	50	50	50	50
	Max. Height	Out-In	m	12	30	30	30	30	30	30	30	30
	Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
			Heating	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

PCA-HA SERIES

R32
R410A

PCA-M71HA

Standard features include a strong carbon-black stainless steel body and built-in oil mist filter to prevent oil from getting into the unit providing a comfortable air conditioning environment in kitchens that use open-flame cooking.



Tough on Oily Smoke


A durable stainless steel casing that is resistant to oil and grease is provided to protect the surface of the body. Grimy dirt and stains are removed easily, enabling the unit to be kept clean at all times.

High-performance Oil Mist Filter


A high-performance heavy-duty oil mist filter is included as standard equipment. The filtering system is more efficient than conventional filters, thereby effectively reducing the oily smoke entering the air conditioner. The filter is disposable, thereby enabling trouble-free cleaning and maintenance.

Oil Mist Filter Cleaning

When used in kitchens, the oil mist filter should be replaced once every two months. The system comes with 12 filters elements. After these have been used, optional elements (PAC-SG38KF-E) can be purchased.



Oil mist filter



Pull the handle to easily slide the filter out


Easy Maintenance – Even for Cleaning the Fan

A separate fan casing that can be disassembled in sections is adopted to ensure easy fan cleaning. Drain pan cleaning onsite is also no problem owing to the use of a pipe connector that is easily removed.




Cosmetic Front and Hanging Fixture Covers (Option)

Cosmetic covers are available to prevent the collection of dust and grime on the main body and hanging fixture sections.

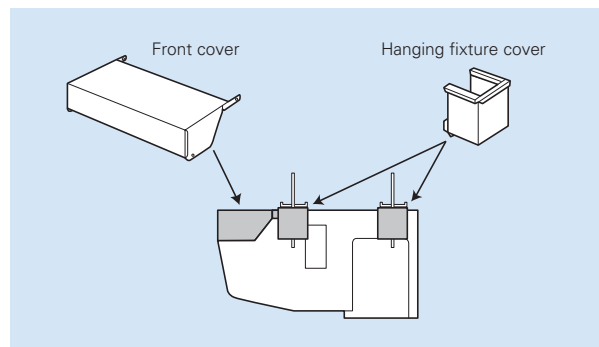

Fresh Outside-air Intake (Option)

There is a knock-out opening on the rear panel of the unit that can be used to bring fresh air into the unit. This helps to improve ventilation and make the kitchen comfortable.

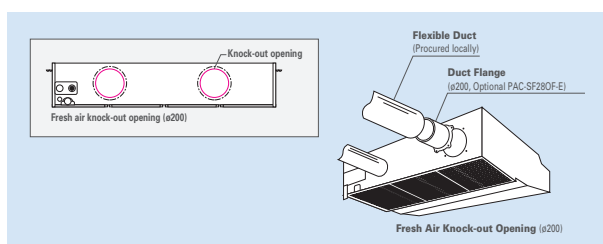

Notes: 1) A fresh-air duct flange is required (sold separately)
2) Intake air is not 100% fresh (outside) air.

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M71HA

Outdoor Unit

R32

For Single



PUZ-ZM71

R32

For Multi
(Twin/Triple)



PUZ-ZM140/250

Remote Controller



Optional



Optional



Optional

PCA-M HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		—	—	—	71x1	—	—	—	—	—	—	—	—	71x2	—	—	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-60TR2-E	—	—	—	—	MSDT-111R3-E	—	—

SERIES SELECTION

Power Inverter Series



Indoor Unit

R32
R410A



PCA-M71HA

Outdoor Unit

R410A


For Single



PUHZ-ZRP71

R410A

For Multi
(Twin/Triple)



PUHZ-ZRP140/250

Remote Controller



Optional



Optional




Optional

PCA-M HA Indoor Unit Combinations Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		—	—	—	71x1	—	—	—	—	—	—	—	—	71x2	—	—	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-60TR-E	—	—	—	—	MSDT-111R-E	—	—

PCA-RP HA SERIES

POWER INVERTER



Type	Inverter Heat Pump			
Indoor Unit	PCA-M71HA			
Outdoor Unit	PUHZ-ZRP71VHA2		PUZ-ZM71VHA	
Refrigerant	R410A DX*1		R32 DX*+1	
Power Supply	Source		Outdoor power supply	
Supply	Outdoor (V/Phase/Hz)		230 / Single / 50	
Cooling	Capacity	Rated	kW	7.1
		Min - Max	kW	3.3 - 8.1
	Total Input	Rated	kW	2.17
	EER		—	—
		EEL Rank		—
	Design Load		kW	7.1
	Annual Electricity Consumption*2		kWh/a	447
	SEER			5.6
		Energy Efficiency Class		A+
	Heating (Average Season)	Capacity	Rated	kW
		Min - Max	kW	3.5 - 10.2
Total Input		Rated	kW	2.35
COP			—	—
		EEL Rank		—
Design Load			kW	4.7
Declared Capacity		at reference design temperature	kW	4.7
		at bivalent temperature	kW	4.7
		at operation limit temperature	kW	3.7
Back Up Heating Capacity			kW	0.0
Annual Electricity Consumption*2			kWh/a	1751
SCOP				3.8
		Energy Efficiency Class		A
Operating Current (max)			A	19.4
Indoor Unit	Input	Rated	kW	0.10
	Operating Current (max)		A	0.43
	Dimensions <Panel>	H x W x D	mm	280 - 1136 - 650
	Weight <Panel>		kg	42
	Air Volume [Lo-Hi]		m³/min	16 - 18
	Sound Level (SPL) [Lo-Hi]		dB(A)	37 - 39
	Sound Level (PWL)		dB(A)	57
	Dimensions	H x W x D	mm	943 - 950 - 330 (+30)
	Weight		kg	70
Outdoor Unit	Air Volume	Cooling	m³/min	55.0
		Heating	m³/min	55.0
	Sound Level (SPL)	Cooling	dB(A)	47
		Heating	dB(A)	49
	Sound Level (PWL)	Cooling	dB(A)	67
		Heating	dB(A)	67
	Operating Current (max)		A	19.0
	Breaker Size		A	25
	Ext. Piping	Diameter	Liquid / Gas	mm
Max. Length		Out-In	m	50
Max. Height		Out-In	m	30
Guaranteed Operating Range [Outdoor]	Cooling*3	°C	−15 ~ +46	−15 ~ +46
	Heating	°C	−20 ~ +21	−20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.


The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than −5°C.

PCA-RP HA SERIES

POWER INVERTER



Type			Inverter Heat Pump			
Indoor Unit			PCA-M71HA			
Outdoor Unit			PUHZ-ZRP71VHA2			
Refrigerant			R410A*1			
Power Supply			Outdoor power supply			
Source			230 / Single / 50			
Outdoor (V/Phase/Hz)						
Cooling	Capacity	Rated	kW	7.1		
		Min - Max	kW	3.3 - 8.1		
	Total Input	Rated	kW	2.17		
					—	
	EER			—		
	EEL Rank			—		
	Design Load		kW	7.1		
	Annual Electricity Consumption*2		kWh/a	447		
	SEER			5.6		
	Energy Efficiency Class			A+		
Heating (Average Season)	Capacity	Rated	kW	7.6		
		Min - Max	kW	3.5 - 10.2		
	Total Input	Rated	kW	2.35		
					—	
	COP			—		
	EEL Rank			—		
	Design Load		kW	4.7		
	Declared Capacity	at reference design temperature	kW	4.7 (−10°C)		
		at bivalent temperature	kW	4.7 (−10°C)		
		at operation limit temperature	kW	3.5 (−20°C)		
	Back Up Heating Capacity		kW	0		
	Annual Electricity Consumption*2		kWh/a	1751		
	SCOP			3.8		
	Energy Efficiency Class			A		
Operating Current (max)			A	19.4		
Indoor Unit	Input	Rated	kW	0.09		
			A	0.43		
	Operating Current (max)					
	Dimensions <Panel>		H × W × D	mm	280 - 1136 - 650	
	Weight <Panel>			kg	41	
	Air Volume [Lo-Hi]			m³/min	17 - 19	
	Sound Level (SPL) [Lo-Hi]			dB(A)	34 - 38	
	Sound Level (PWL)			dB(A)	56	
	Outdoor Unit	Dimensions		H × W × D	mm	943 - 950 - 330 (+30)
Weight			kg	70		
Air Volume		Cooling	m³/min	55.0		
		Heating	m³/min	55.0		
Sound Level (SPL)		Cooling	dB(A)	47		
		Heating	dB(A)	48		
Sound Level (PWL)		Cooling	dB(A)	67		
		Heating				
Operating Current (max)			A	19.0		
Breaker Size			A	25		
Ext. Piping		Diameter	Liquid / Gas	mm	9.52 / 15.88	
	Max. Length	Out-In	m	50		
	Max. Height	Out-In	m	30		
	Guaranteed Operating Range [Outdoor]			Cooling*3	−15 ~ +46	
			Heating	−20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than −5°C.

PSA SERIES R410A


Installation of this floor-standing series is easy and quick.
An excellent choice when there is a sudden need for an air conditioner to be installed.



Quick and Easy Installation, Space-saving and Design That Compliments Any Interior


The floor-standing indoor unit is mounted on the floor, enabling quick installation. Its compact body requires only minimal space.

● PSA-RP71KA

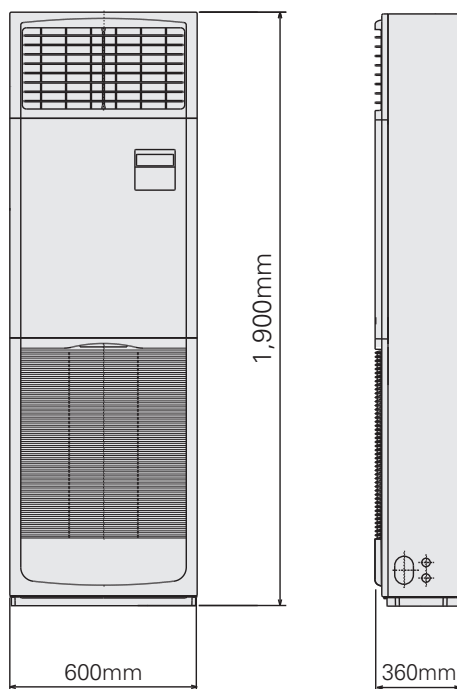

4-way pipe work connections enable greater freedom in installation

Remarkable freedom in choosing installation sites is allowed by providing piping connection to the indoor unit in four places: left side, back, from underneath and on the right side of the unit. Even installation in the corner of a room is easy.

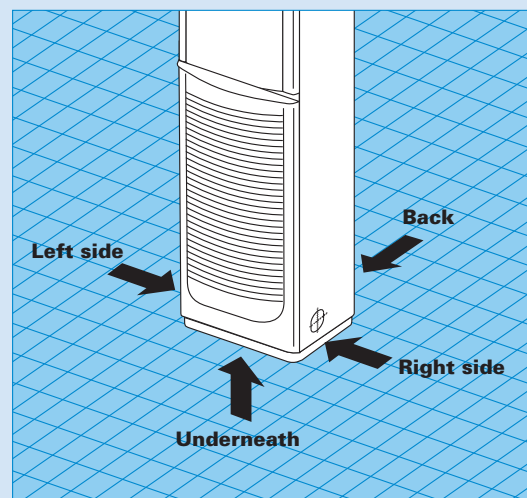

Built-in Remote Controller

Equipped with PAR-40MAA, the latest wired remote controller. Offering excellent readability and a diverse range of functions, the remote controller increases user-friendliness and boosts user satisfaction.

Main Functions

- Multi-language Display
- Limited Temperature Range Setting
- Auto-off Timer
- Operation Lock
- Weekly Timer



SERIES SELECTION

Power Inverter Series



Indoor Unit

R410A



PSA-RP71/100/125/140KA

Outdoor Unit

R410A

For Single



PUHZ-ZRP71



40

R410A

For Multi
(Twin/Triple)



50

Remote Controller



Built-in

Standard Inverter Series



Indoor Unit

R410A



PSA-RP71/100/125/140KA

Outdoor Unit

R410A

For Single



PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple)



PUHZ-P140



Remote Controller




Built-in

PSZ-RP KA Indoor Unit Combinations Outdoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		—	—	—	71x1	100x1	125x1	140x1	—	—	—	—	—	71x2	100x2	125x2	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E	MSDD-50WR-E	—	—	MSOT-111R-E	—	—	
Standard Inverter (PUHZ-P)		—	—	—	—	100x1	125x1	140x1	—	—	—	—	—	71x2	100x2	125x2	—	—	71x3	—	—
	Distribution Pipe	—	—	—	—	—	—	—	—	—	—	—	—	MSDD-50TR-E	MSDD-50WR-E	—	—	MSOT-111R-E	—	—	

PSA-RP SERIES

POWER INVERTER



Type				Inverter Heat Pump							
Indoor Unit				PSA-RP71KA		PSA-RP100KA		PSA-RP125KA		PSA-RP140KA	
Outdoor Unit				PUHZ-ZRP71VHA2		PUHZ-ZRP100VKA3		PUHZ-ZRP125VKA3		PUHZ-ZRP140VKA3	
Refrigerant				R410A*1							
Power Supply	Source			Outdoor power supply							
	Outdoor (V/Phase/Hz)			VKA · VHA:230 / Single / 50, YKA:400 / Three / 50							
Cooling	Capacity	Rated	kW	7.1	9.5	9.5	12.5	12.5	13.4	13.4	
		Min - Max	kW	3.3 ~ 8.1	4.9 ~ 11.4	4.9 ~ 11.4	5.5 ~ 14.0	5.5 ~ 14.0	6.2 ~ 15.0	6.2 ~ 15.0	
	Total Input	Rated	kW	1.89	2.50	2.50	4.09	4.09	4.06	4.06	
	EER			—	—	—	3.06	3.06	3.30	3.30	
	EEL Rank			—	—	—	—	—	—	—	
	Design Load		kW	7.1	9.5	9.5	—	—	—	—	
	Annual Electricity Consumption*2		kWh/a	396	595	606	—	—	—	—	
	SEER			6.3	5.6	5.5	—	—	—	—	
	Energy Efficiency Class			A++	A+	A	—	—	—	—	
	Heating (Average Season)	Capacity	Rated	kW	7.6	11.2	11.2	14.0	14.0	16.0	16.0
		Min - Max	kW	3.5 ~ 10.2	4.5 ~ 14.0	4.5 ~ 14.0	5.0 ~ 16.0	5.0 ~ 16.0	5.7 ~ 18.0	5.7 ~ 18.0	
Total Input		Rated	kW	2.21	3.08	3.08	4.24	4.24	4.79	4.79	
COP				—	—	—	3.30	3.30	3.34	3.34	
EEL Rank			—	—	—	—	—	—	—		
Design Load			kW	4.7	7.8	7.8	—	—	—	—	
Declared Capacity		at reference design temperature	kW	4.7 (–10°C)	7.8 (–10°C)	7.8 (–10°C)	—	—	—	—	
		at bivalent temperature	kW	4.7 (–10°C)	7.8 (–10°C)	7.8 (–10°C)	—	—	—	—	
		at operation limit temperature	kW	3.5 (–20°C)	5.8 (–20°C)	5.8 (–20°C)	—	—	—	—	
Back Up Heating Capacity			kW	0	0	0	—	—	—	—	
Annual Electricity Consumption*2		kWh/a	1666	2761	2761	—	—	—	—		
SCOP			4.0	4.0	4.0	—	—	—	—		
Energy Efficiency Class			A+	A+	A+	—	—	—	—		
Operating Current (max)		A	19.4	27.2	8.7	27.2	10.2	28.7	13.7		
Indoor Unit	Input	Rated	kW	0.06	0.11	0.11	0.11	0.11	0.11	0.11	
	Operating Current (max)		A	0.4	0.71	0.71	0.73	0.73	0.73	0.73	
	Dimensions <Panel>	H × W × D	mm	1900 - 600 - 360							
	Weight <Panel>		kg	46	46	46	46	46	48	48	
	Air Volume [Lo-Mid-Hi]		m³/min	20 - 22 - 24	25 - 28 - 30	25 - 28 - 30	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	40 - 42 - 44	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66	
	Dimensions	H × W × D	mm	943-950-330(+30)		1338-1050-330(+40)					
	Weight		kg	70	116	123	116	125	118	131	
	Air Volume	Cooling	m³/min	55.0	110.0	110.0	120.0	120.0	120.0	120.0	
Outdoor Unit		Heating	m³/min	55.0	110.0	110.0	120.0	120.0	120.0	120.0	
	Sound Level (SPL)	Cooling	dB(A)	47	49	49	50	50	50	50	
		Heating	dB(A)	48	51	51	52	52	52	52	
	Sound Level (PWL)	Cooling	dB(A)	67	69	69	70	70	70	70	
	Operating Current (max)		A	19.0	26.5	8.0	26.5	9.5	28.0	13.0	
	Breaker Size		A	25	32	16	32	16	40	16	
	Diameter	Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
	Max. Length	Out-In	m	50	75	75	75	75	75	75	
	Max. Height	Out-In	m	30	30	30	30	30	30	30	
	Guaranteed Operating Range [Outdoor]	Cooling*3	°C	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	
Heating		°C	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.


The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PSA-RP SERIES

STANDARD INVERTER



Type			Inverter Heat Pump							
Indoor Unit			PSA-RP100KA		PSA-RP125KA		PSA-RP140KA			
Outdoor Unit			PUHZ-P100VKA		PUHZ-P100YKA		PUHZ-P125VKA		PUHZ-P125YKA	
Refrigerant			R410A**1							
Power Supply			Outdoor power supply							
Source			VKA:230 / Single / 50, YKA:400 / Three / 50							
Outdoor (V/Phase/Hz)										
Cooling	Capacity	Rated	kW	9.4	9.4	12.1	12.1	13.6	13.6	
		Min - Max	kW	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 13.7	5.8 - 13.7	
	Total Input	Rated	kW	3.12	3.12	5.02	5.02	6.38	6.38	
	EER			3.01	3.01	2.41	2.41	2.13	2.13	
	EEL Rank									
	Design Load		kW	9.4	9.4	-	-	-	-	
	Annual Electricity Consumption**2		kWh/a	644	644	-	-	-	-	
	SEER			5.1	5.1	-	-	-	-	
	Energy Efficiency Class			A	A	-	-	-	-	
	Heating (Average Season)	Capacity	Rated	kW	11.2	11.2	13.5	13.5	15.0	15.0
		Min - Max	kW	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8	
Total Input		Rated	kW	3.28	3.28	4.80	4.80	4.82	4.82	
COP				3.41	3.41	2.81	2.81	3.11	3.11	
EEL Rank			-	-	-	-	-	-		
Design Load			kW	8.0	8.0	-	-	-	-	
Declared Capacity		at reference design temperature	kW	6.0 (-10°C)	6.0 (-10°C)	-	-	-	-	
		at bivalent temperature	kW	7.0 (-7°C)	7.0 (-7°C)	-	-	-	-	
		at operation limit temperature	kW	4.5 (-15°C)	4.5 (-15°C)	-	-	-	-	
Back Up Heating Capacity			kW	2.0	2.0	-	-	-	-	
Annual Electricity Consumption**2			kWh/a	2794	2794	-	-	-	-	
SCOP				4.0	4.0	-	-	-	-	
Energy Efficiency Class			A+	A+	-	-	-	-		
Operating Current (max)			A	20.7	12.2	27.2	12.2	30.7	12.2	
Indoor Unit	Input	Rated	kW	0.11	0.11	0.11	0.11	0.11	0.11	
	Operating Current (max)		A	0.71	0.71	0.73	0.73	0.73	0.73	
	Dimensions <Panel>	H x W x D	mm	1900 - 600 - 360						
	Weight <Panel>		kg	46	46	46	46	48	48	
	Air Volume [Lo-Mid-Hi]		m³/min	25 - 28 - 30	25 - 28 - 30	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	25 - 28 - 31	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	45 - 49 - 51	
	Sound Level (PWL)		dB(A)	65	65	66	66	66	66	
	Dimensions	H x W x D	mm	981 - 1050 - 330		981 - 1050 - 330		981 - 1050 - 330		
	Weight		kg	76	78	84	85	84	85	
	Outdoor Unit	Air Volume	Cooling	m³/min	79	79	86	86	86	86
		Heating	m³/min	79	79	92	92	92	92	
Sound Level (SPL)		Cooling	dB(A)	51	51	54	54	56	56	
		Heating	dB(A)	54	54	56	56	57	57	
Sound Level (PWL)		Cooling	dB(A)	70	70	72	72	75	75	
Operating Current (max)			A	20.0	11.5	26.5	11.5	30.0	11.5	
Breaker Size			A	32	16	32	16	40	16	
Diameter		Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	
Max. Length		Out-In	m	50	50	50	50	50	50	
Max. Height		Out-In	m	30	30	30	30	30	30	
Guaranteed Operating Range [Outdoor]	Cooling**3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46		
	Heating	°C	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21		

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

MULTI SPLIT

SERIES



SELECTION

Choose from types of indoor units and outdoor units that can run up to six indoor units each.
Create the system that best matches room shapes and number of rooms.

R32 INDOOR UNITS			R32 OUTDOOR UNITS		
Wall-mounted MSZ-LN (18·25·35·50) MSZ-EF MSZ-AP25-50 MSZ-AP60VG MSZ-AP15-20 MSZ-BT		Floor-standing MFZ-KT Ceiling-suspended PCA Ceiling-concealed SEZ PEAD	2-port up to 2 indoor units MXZ-2F33VF3 MXZ-2F42VF3 MXZ-2F53VF(H)3 MXZ-2F53VFHZ	3-port up to 3 indoor units MXZ-3F54VF3 MXZ-3F68VF3	4-port up to 4 indoor units MXZ-4F72VF3 MXZ-4F80VF3 MXZ-4F83VF MXZ-4F83VFHZ
			5-port up to 5 indoor units MXZ-5F102VF	6-port up to 6 indoor units MXZ-6F122VF	
Cassette SLZ MLZ-KP					

R410A INDOOR UNITS			R410A OUTDOOR UNITS		
Wall-mounted MSZ-LN (25·35) MSZ-AP25-50 MSZ-AP15-20 MSZ-SF25-50 MSZ-SF15-20 MSZ-EF MSZ-GF		Floor-standing MFZ-KJ Ceiling-suspended PCA Ceiling-concealed SEZ PEAD	2-port up to 2 indoor units MXZ-2D33VA MXZ-2D42VA2 MXZ-2D53VA(H)2 MXZ-2E53VAHZ	3-port up to 3 indoor units MXZ-3E54VA MXZ-3E68VA	4-port up to 4 indoor units MXZ-4E72VA MXZ-4E83VA MXZ-4E83VAHZ
			5-port up to 5 indoor units MXZ-5E102VA	6-port up to 6 indoor units MXZ-6D122VA2	
Cassette SLZ MLZ-KP PLA					

CHECK SYSTEM COMPATIBILITY

Possible combinations depends on the outdoor unit chosen. Please check the following points.

Check Indoor Units

Refer to the "Indoor Unit Compatibility Table" to check if the indoor units selected can be used with the outdoor unit selected. (Indoor units not listed in the table cannot be used.)

Check Indoor Unit Capacity Combination

Refer to the "Combination Table" to check if the capacity combination of the indoor unit selected is connectable. (Combinations not listed cannot be connected.)

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables.

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.



R32

2-port

MXZ-2F33VF3
MXZ-2F42VF3
MXZ-2F53VF(H)3



R32

3-port 4-port 5-port

MXZ-3F54VF3
MXZ-3F68VF3
MXZ-4F72VF3
MXZ-4F80VF3
MXZ-4F83VF
MXZ-5F102VF




R32

6-port

MXZ-6F122VF

EXAMPLE SYSTEM

MXZ-4F72VF system

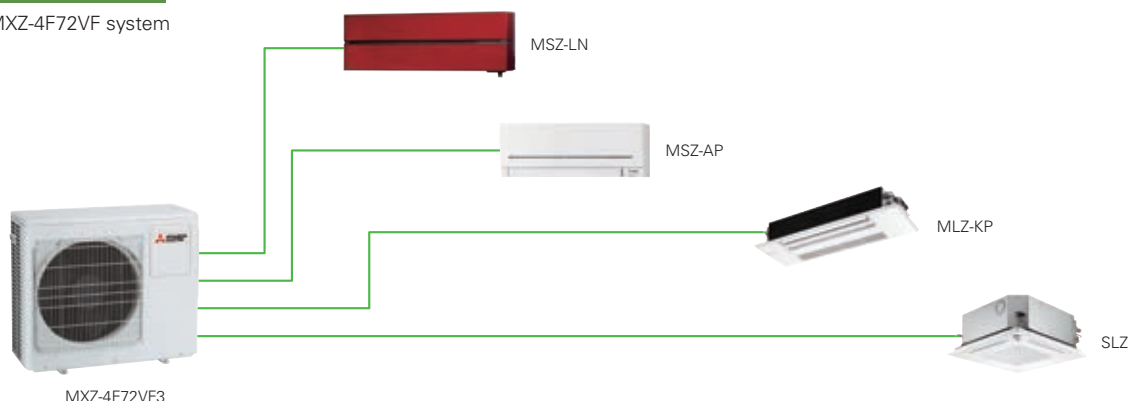

No necessity for refrigerant charging

Depending on the pipe length and the indoor units that are connected, conventional models have required refrigerant charging, but no R32 MXZ model needs to be charged with additional refrigerant. This eliminates troublesome work at the site of installation, and reduces the amount of additional work for the installer.

Handle Up to 4 Rooms with a Single Outdoor Unit


The MXZ Series for R32 offers a seven-system line-up to choose from, ranging between 3.3 and 8.0kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.

Support Functions

Wiring/Piping Correction Function* (3F54/3F68/4F72/4F80)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes to complete and must be conducted with the unit set to the "Cooling" mode.

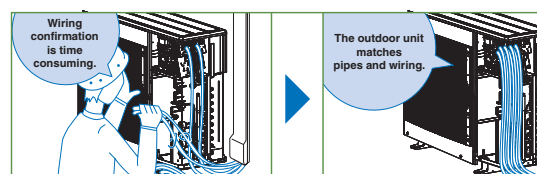

Operation Lock

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)

Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units				Up to 3 Indoor Units		Up to 4 Indoor Units	
Indoor Unit				Please refer to *4							
Outdoor Unit				MXZ-2F33VF3	MXZ-2F42VF3	MXZ-2F53VF3	MXZ-2F53VFH3	MXZ-3F54VF3	MXZ-3F68VF3	MXZ-4F72VF3	MXZ-4F80VF3
Refrigerant				R32*1							
Power Supply	Source			Outdoor power supply							
	Outdoor (V/Phase/Hz)			220 - 230 - 240V / Single / 50Hz							
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0
	Input	Rated	kW	0.85	0.98	1.40	1.40	1.32	1.84	1.85	2.25
	EER*4			3.88	4.29	3.79	3.79	4.10	3.70	3.89	3.56
	Design Load		kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.0
	Annual Electricity Consumption*2		kWh/a	189	169	216	216	222	301	311	368
	SEER*4			6.1	8.7	8.6	8.6	8.5	7.9	8.1	7.6
		Energy Efficiency Class*4		A++	A+++	A+++	A+++	A+++	A++	A++	A++
Heating (Average Season)	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	8.8
	Input	Rated	kW	0.91	0.88	1.56	1.56	1.40	1.91	1.87	2.00
	COP*4			4.40	5.11	4.10	4.10	5.00	4.50	4.60	4.40
	Design Load		kW	2.7	3.5	3.5	3.5	5.2	6.8	7.0	7.0
	Declared Capacity	at reference design temperature	kW	2.2	2.7	2.7	2.7	4.2	5.7	5.6	5.6
		at bivalent temperature	kW	2.4	2.9	2.9	2.9	4.7	6.4	6.2	6.2
		at operation limit temperature	kW	1.6	2.3	2.3	2.1	3.2	4.6	4.8	4.8
	Back Up Heating Capacity		kW	0.5	0.8	0.8	0.8	1.0	1.1	1.4	1.4
	Annual Electricity Consumption*2		kWh/a	944	1065	1065	1089	1583	2321	2389	2389
	SCOP*4			4.0	4.6	4.6	4.5	4.6	4.1	4.1	4.1
		Energy Efficiency Class*4		A+	A++	A++	A+	A++	A+	A+	A+
Operating Current (max)				A	10.0	12.2	12.2	18.0	18.0	18.0	
Outdoor Unit	Dimensions	H × W × D	mm	550 - 800 (+69) - 285 (+59.5)				710 - 840 (+30) - 330 (+66)			
	Weight		kg	33	37	37	38	58	58	59	59
	Air Volume	Cooling	m ³ /min	31.5	28.4	32.7	32.7	31	35.4	35.4	40.3
		Heating	m ³ /min	32.3	33.5	34.7	34.7	31	39.6	42.7	44.1
	Sound Level (SPL)	Cooling	dB(A)	49	44	46	46	46	48	48	50
		Heating	dB(A)	50	50	51	51	50	53	54	55
	Sound Level (PWL)	Cooling	dB(A)	60	59	61	61	60	63	63	65
		Heating	dB(A)	60	59	61	61	60	63	63	65
	Operating Current	Cooling	A	4.3 - 4.1 - 3.9	4.9 - 4.7 - 4.5	6.5 - 6.2 - 6.0	6.5 - 6.2 - 6.0	6.0 - 5.7 - 5.5	8.4 - 8.0 - 7.7	8.5 - 8.1 - 7.8	10.3 - 9.9 - 9.5
		Heating	A	4.6 - 4.4 - 4.2	4.4 - 4.3 - 4.1	7.5 - 7.1 - 6.8	7.5 - 7.1 - 6.8	6.4 - 6.1 - 5.9	8.8 - 8.4 - 8.0	8.6 - 8.2 - 7.9	9.2 - 8.8 - 8.4
Breaker Size		A	15	15	15	15	25	25	25	25	
Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 × 2 / 9.52 × 2	6.35 × 2 / 9.52 × 2	6.35 × 2 / 9.52 × 2	6.35 × 2 / 9.52 × 2	6.35 × 3 / 9.52 × 3	6.35 × 3 / 9.52 × 3	6.35 × 4 / 12.7 × 1 + 9.52 × 3	
	Total Piping Length (max)		m	20	30	30	30	50	60	60	60
	Each Indoor Unit Piping Length (max)		m	15	20	20	20	25	25	25	25
	Max. Height		m	10	15(15)*3	15(15)*3	15(15)*3	15(15)*3	15(15)*3	15(15)*3	15(15)*3
	Chargeless Length		m	20	30	30	30	50	60	60	60
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46							
		Heating	°C	-15 ~ +24							

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 560. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 560 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results.

Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 15m.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured

when connected to the indoor units listed below.

MXZ-2F33VF3	MSZ-AP15VG + MSZ-LN18VG2
MXZ-2F42VF3	MSZ-LN18VG2 + MSZ-LN25VG2
MXZ-2F53VF(H)3	MSZ-LN18VG2 + MSZ-LN35VG2
MXZ-3F54VF3	MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2
MXZ-3F68VF3	MSZ-LN18VG2 + MSZ-LN25VG2 + MSZ-LN25VG2
MXZ-4F72VF3	MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2
MXZ-4F80VF3	MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN18VG2 + MSZ-LN25VG2

Type (Inverter Multi - Split Heat Pump)				Up to 4 Indoor Units		Up to 5 Indoor Units		Up to 6 Indoor Units		
Indoor Unit				Please refer to **4						
Outdoor Unit				MXZ-4F83VF		MXZ-5F102VF		MXZ-6F122VF		
Refrigerant				R32**1		R32**1		R32**1		
Power Supply		Source Outdoor (V/Phase/Hz)		Outdoor power supply 220 - 230 - 240V / Single / 50Hz						
Cooling	Capacity	Rated	kW	8,3		10,2		12,2		
		Min-Max	kW	3.7 - 9.2		3.9 - 11.0		3.5 - 14.0		
	Input	Rated	kW	1,97		2,80		3,66		
	EER**4			4,21		3,64		3,33		
	Design Load			8,3		10,2		12,2		
	Annual Electricity Consumption**2			342		436		559		
	SEER**4			8,5		8,2		303,0%		
	Energy Efficiency Class**4			A+++		A++		-		
Heating (Average Season)	Capacity	Rated	kW	9,3		10,5		14,0		
		Rated (-7°C)	kW	6,2		6,4		7,17		
		Rated (-7°C)	kW	6,20		6,40		7,17		
		Max (-15°C)	kW	4,90		4,90		5,20		
		Min-Max	kW	3.4 - 11.6		4.1 - 14.0		3.5 - 16.0		
	Input	Rated	kW	2,00		2,28		3,31		
	COP**4			4,65		4,60		4,23		
	Design Load			7,0		7,4		8,1		
	Declared Capacity	at reference design temperature		kW	5,80		5,90		6,50	
		at bivalent temperature		kW	6,20		6,40		7,17	
		at operation limit temperature		kW	4,90		4,90		5,20	
	Back Up Heating Capacity			1,20		1,50		1,60		
	Annual Electricity Consumption**2			2087		2205		2438		
	SCOP**4			4,7		4,7		183,1%		
	Energy Efficiency Class**4			A++		A++		-		
	Max. Operating Current (Indoor+Outdoor)				A		21,4		29,8	
Outdoor Unit	Dimensions	H x W x D	mm	796-950-330		796-950-330		1048-950-330		
	Weight		kg	62		62		87		
	Air Volume	Cooling	m³/min	57		63		63		
		Heating	m³/min	62		75		77		
	Sound Level (SPL)	Cooling	dB(A)	49		52		55		
		Heating	dB(A)	51		56		57		
	Sound Level (PWL)	Cooling	dB(A)	61		65		69 / 74		
		Heating								
	Operating Current	Cooling	A	9.1 - 8.7 - 8.3		12.9 - 12.3 - 11.8		16.8 - 16.1 - 15.4		
		Heating	A	9.2 - 8.8 - 8.4		10.5 - 10.0 - 9.6		15.2 - 14.5 - 13.9		
	Starting current (Total)			A		8,8		12,3		
Breaker Size			A		25		32			
Ext. Piping	Port Diameter	Liquid	mm	6.35x4		6.35x5		6.35x6		
		Gas	mm	12.7 x 1+9.52 x 3		12.7 x 1+9.52 x 4		12.7 x 1+9.52 x 5		
	Total Piping Length (max)			m		70		80		
	Each Indoor Unit Piping Length (max)			m		25		25		
	Max. Height			m		15		15		
	Chargeless Length			m		70		80		
	Guaranteed Operating Range [Outdoor]			Cooling		°C		-10 ~ +46		
			Heating		°C		-15 ~ +24			

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R32 is 675 in the IPCC 4th Assessment Report.

MXZ SERIES

Advancements in the MXZ Series include efficiency and flexibility in system expansion capabilities. The best solution when requiring multi-system air conditioning needs.



R410A

2-port

MXZ-2D33VA
MXZ-2D42VA2
MXZ-2D53VA (H)2



R410A

3-port 4-port

MXZ-3E54VA
MXZ-3E68VA
MXZ-4E72VA



R410A

4-port 5-port

MXZ-4E83VA
MXZ-5E102VA




R410A

6-port

MXZ-6D122VA2

EXAMPLE SYSTEM

MXZ-6D122VA2 system

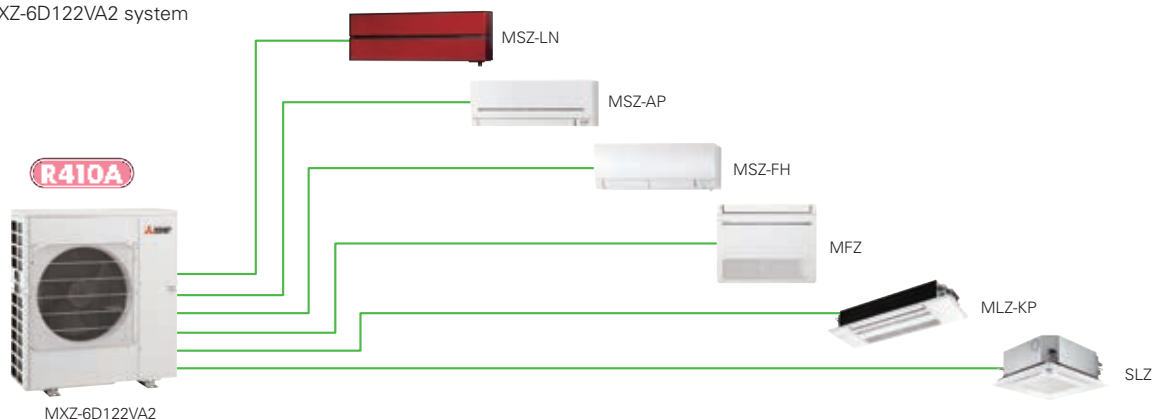

Handle Up to 6 Rooms with a Single Outdoor Unit


The MXZ Series offers a nine-system line-up to choose from, ranging between 3.3 and 12.2kW. All of them are compatible with specific M, S and P series indoor units. A single outdoor unit can handle a wide range of building layouts.

Support Functions

Wiring/Piping Correction Function* (3E54/3E68/4E72/4E83/5E102/6D122)

Simply press a single button to confirm if wiring and piping are properly connected. Wiring errors are corrected automatically when discovered. This eliminates the need to confirm complicated wiring connections when expanding the system. (For details, refer to the outdoor unit installation manual.)

* Function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes to complete and must be conducted with the unit set to the "Cooling" mode.

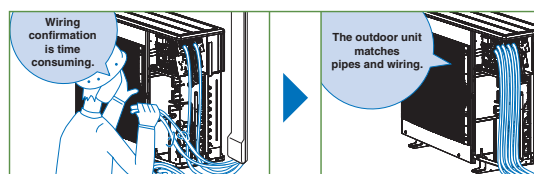

Ampere Limit Adjustment*

(4E83/5E102/6D122)

Dipswitch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs. (For details, refer to the outdoor unit installation manual.)

* Maximum capacity is lowered with the use of this function.

Operation Lock

To accommodate specific use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service. (For details, refer to the outdoor unit installation manual.)



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units				Up to 3 Indoor Units		Up to 4 Indoor Units		Up to 5 Indoor Units
Indoor Unit				Please refer to (*4)								
Outdoor Unit				N: MXZ-2D33VA	N: MXZ-2D42VA2	N: MXZ-2D53VA2	N: MXZ-2D53VAH2	N: MXZ-3E54VA	N: MXZ-3E68VA	N: MXZ-4E72VA	MXZ-4E83VA	MXZ-5E102VA
Refrigerant				R410A*1								
Power Supply	Source			Outdoor power supply								
	Outdoor (V/Phase/Hz)			220 - 230 - 240V / Single / 50								
Cooling	Capacity	Rated	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.3	10.2
		Min - Max	kW	1.1 - 3.8	1.1 - 4.4	1.1 - 5.6	1.1 - 5.6	2.9 - 6.8	2.9 - 8.4	3.7 - 8.8	3.7 - 9.2	3.9 - 11.0
	Input (Indoor+Outdoor)	Rated	kW	0.90	1.00	1.54	1.54	1.35	2.19	2.25	2.44	3.15
	Design Load	kW	3.3	4.2	5.3	5.3	5.4	6.8	7.2	8.3	10.2	
	Annual Electricity Consumption*2	kWh/a	211	216	262	262	295	425	443	460	537	
	SEER*4		5.5	6.8	7.1	7.1	6.4	5.6	5.7	6.3	6.6	
	Energy Efficiency Class*4			A	A++	A++	A++	A++	A+	A+	A++	A++
Heating (Average Season)	Capacity	Rated	kW	4.0	4.5	6.4	6.4	7.0	8.6	8.6	9.3	10.5
		Min - Max	kW	1.0 - 4.1	1.0 - 4.8	1.0 - 7.0	1.0 - 7.0	2.6 - 9.0	2.6 - 10.6	3.4 - 10.7	3.4 - 11.6	4.1 - 14.0
	Input (Indoor+Outdoor)	Rated	kW	0.96	0.93	1.70	1.70	1.59	2.38	2.28	2.00	2.34
	Design Load	kW	2.7	3.2	4.5	4.5	5.0	6.8	7.0	8.7	8.9	
	Declared Capacity	at reference design temperature	kW	2.1	2.7	3.7	3.6	4.0	5.4	5.6	7.1	7.3
		at bivalent temperature	kW	2.4	3.0	4.0	4.0	4.49	6.0	6.2	7.8	7.9
		at operation limit temperature	kW	1.7	2.3	3.3	3.0	3.17	4.4	4.7	6.0	6.3
	Back Up Heating Capacity	kW	0.6	0.5	0.8	0.9	1.0	1.4	1.4	1.6	1.6	
	Annual Electricity Consumption*2	kWh/a	926	1065	1507	1546	1751	2466	2516	2889	2958	
	SCOP*4		4.1	4.2	4.2	4.1	4.0	3.9	3.9	4.2	4.2	
	Energy Efficiency Class*4			A+	A+	A+	A+	A+	A	A	A+	A+
Max. Operating Current (Indoor+Outdoor)			A	10.0	12.2	12.2	12.2	18.0	18.0	18.0	21.4	21.4
Outdoor Unit	Dimensions		H x W x D	mm	550 - 800(+69) - 285(+59.5)				710 - 840(+30) - 330(+66)		796 - 950 - 330	
	Weight		kg	32	37	37	38	58	58	59	63	64
			m³/min	32.9	27.7	32.9	32.9	42.1	42.1	42.1	55.6	65.1
	Air Volume	Heating	m³/min	33.7	33.3	33.3	33.3	43.0	43.0	43.0	55.6	68.0
	Sound Level (SPL)	Cooling	dB(A)	49	46	50	50	50	50	50	49	52
		Heating	dB(A)	50	51	53	53	53	53	53	51	56
	Sound Level (PWL)	Cooling	dB(A)	63	60	64	64	64	64	64	61	65
Breaker Size			A	10	15	15	15	25	25	25	25	25
Ext. Piping	Diameter	Liquid	mm	6.35 x 2	6.35 x 2	6.35 x 2	6.35 x 2	6.35 x 3	6.35 x 3	6.35 x 4	6.35 x 4	6.35 x 5
		Gas	mm	9.52 x 2	9.52 x 2	9.52 x 2	9.52 x 2	9.52 x 3	9.52 x 3	12.7x1+9.52x3	12.7x1+9.52x3	12.7x1+9.52x4
	Total Piping Length (max)		m	20	30	30	30	50	60	60	70	80
	Each Indoor Unit Piping Length (max)		m	15	20	20	20	25	25	25	25	25
	Max. Height		m	10	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3	15 (10)*3
	Chargeless Length		m	20	20	20	20	40	40	40	25	0
Guaranteed Operating Range [Outdoor]	Cooling			°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
				°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24

N: Please refer to the NOTE below.

Type (Inverter Multi - Split Heat Pump)				Up to 6 Indoor Units		
Indoor Unit				Please refer to (*5)		
Outdoor Unit				MXZ-6D122VA2		
Refrigerant				R410A*1		
Power Supply	Source	Outdoor power supply				
	Outdoor (V/Phase/Hz)	220 - 230 - 240V / Single / 50				
Cooling	Capacity	Rated	kW	12.2		
		Min - Max	kW	3.5 - 13.5		
	Input*5	Rated	kW	3.66		
		EER*6		3.33		
			EEL Rank	A		
Heating	Capacity	Rated	kW	14.0		
		Min - Max	kW	3.5 - 16.5		
	Input*5	Rated	kW	3.31		
		COP*6		4.23		
			EEL Rank	A		
Operating Current (max)*5			A	26.8		
Outdoor Unit	Dimensions		H x W x D	mm	1048-950-330	
	Weight			kg	88	
		Air Volume	Cooling	m³/min	63.0	
	Heating		m³/min	77.0		
	Sound Level (SPL)	Cooling	dB(A)	55		
		Heating	dB(A)	57		
	Sound Level (PWL)	Cooling	dB(A)	70		
		Breaker Size			A	32
	Ext. Piping	Diameter	Liquid	mm	6.35×6	
			Gas	mm	12.7×1+9.52×5	
Total Piping Length (max)		m	80			
Each Indoor Unit Piping Length (max)		m	25			
Max. Height		m	15 (10)*3			
Chargeless Length		m	30			
Guaranteed Operating Range [Outdoor]	Cooling			℃	-10 ~ +46	
				℃	-15 ~ +24	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2D33VA → MSZ-SF15VA + MSZ-EF18VE
MXZ-2D42VA2 → MSZ-EF18VE + MSZ-EF25VE
MXZ-2D53VA(H)2 → MSZ-EF18VE + MSZ-EF35VE
MXZ-3E54VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE
MXZ-3E68VA → MSZ-EF18VE + MSZ-EF25VE + MSZ-EF25VE
MXZ-4E72VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE
MXZ-4E83VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF25VE
MXZ-5E102VA → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF22VE

*5 Power input and operating current (max) figures are for outdoor unit only

*6 EER/COP, EEL rank, values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-6D122VA2 → MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF18VE + MSZ-EF25VE + MSZ-EF25VE

NOTE

When connecting the MFZ-KJ series indoor unit(s) to this outdoor unit, charge additional refrigerant according to the instructions in the diagram below.

MXZ-2D33VA

No. of MFZ-KJ indoor units	Pipe length (L)	Maximum amount of refrigerant
1 unit	~20m	1250g
2 units	100g additional (Total 1250g)	1250g
2 units	Not available (Only one MFZ-KJ series indoor unit can be connected.)	

MXZ-2D42VA2 MXZ-2D53VA2 MXZ-2D53VAH2

No. of MFZ-KJ indoor units	Pipe length (L)	Maximum amount of refrigerant
1 unit	~20m	1600g
2 units	100g additional (Total 1400g)	1600g
2 units	200g additional (Total 1500g)	1700g

MXZ-3E54VA

No. of MFZ-KJ indoor units	Pipe length (L)	Maximum amount of refrigerant
1 unit	~40m	3000g
2 units	100g additional (Total 2800g)	3000g
2 units	200g additional (Total 2900g)	3100g
3 units	300g additional (Total 3000g)	3200g

MXZ-3E68VA MXZ-4E72VA

No. of MFZ-KJ indoor units	Pipe length (L)	Maximum amount of refrigerant
1 unit	~40m	3200g
2 units	100g additional (Total 2800g)	3200g
2 units	200g additional (Total 2900g)	3300g
3 units	300g additional (Total 3000g)	3400g

MXZ-HA SERIES

Multi-port outdoor units exclusively for MSZ-HR indoor units.



R32

2-port

MXZ-2HA40VF
MXZ-2HA50VF



R32

3-port

MXZ-3HA50VF

Stylish Design with Flat Panel Front

A stylish flat panel design is employed for the front of the indoor unit. The simple look matches room aesthetics.




Easy to create various combinations

Wide range of simple combinations only possible using multi-port outdoor units.


Two bedrooms




Three bedrooms

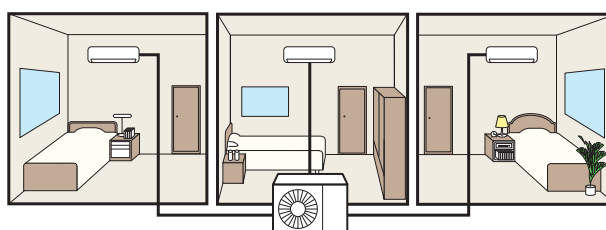

Living room and one bedroom

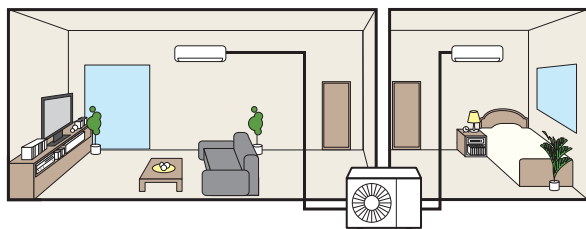

Wide living room

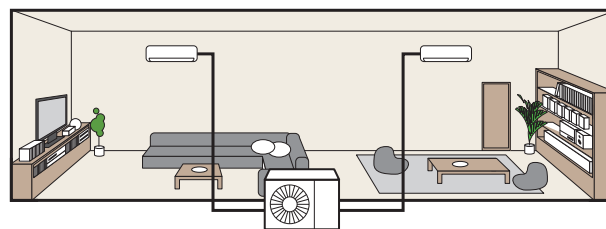

MXZ-HA SERIES

INVERTER MULTI



Type (Inverter Multi - Split Heat Pump)				Up to 2 Indoor Units		Up to 3 Indoor Units		
Indoor Unit				Please refer to (*4)				
Outdoor Unit				MXZ-2HA40VF	MXZ-2HA50VF	MXZ-3HA50VF		
Refrigerant				R32*1				
Power Supply	Source			Outdoor power supply				
	Outdoor (V/Phase/Hz)			220-230-240 / Single / 50				
Cooling	Capacity	Rated	kW	4.0	5.0	5.0		
	Input*4	Rated	kW	1.05	1.52	1.26		
	EER*4			3.81	3.29	3.97		
		EEL Rank*4		A	A	A		
	Design Load		kW	4.0	5.0	5.0		
	Annual Electricity Consumption*2		kWh/a	172	225	241		
	SEER*4			8.12	7.78	7.26		
	Energy Efficiency Class*4			A++	A++	A++		
	Heating (Average Season)	Capacity	Rated	kW	4.3	6.0	6.0	
Input		Rated	kW	0.91	1.54	1.30		
COP*4				4.73	3.90	4.62		
		EEL Rank*4		A	A	A		
Design Load			kW	3.2	3.2	4.0		
Declared Capacity		at reference design temperature	kW	2.4	2.4	3.0		
		at bivalent temperature	kW	2.9	2.9	3.6		
		at operation limit temperature	kW	2.1	2.1	2.6		
Back Up Heating Capacity			kW	0.8	0.8	1.0		
Annual Electricity Consumption*2			kWh/a	1043	1043	1394		
SCOP*4				4.30	4.30	4.02		
Energy Efficiency Class*4				A+	A+	A+		
Operating Current (max)			A	12.2	12.2	18.0		
Outdoor Unit	Dimensions	H x W x D	mm	550 - 800 (+69) - 285 (+59.5)		710 - 840 (+30) - 330 (+66)		
	Weight		kg	37		57		
	Air Volume	Cooling	m³/min	28.4		31.0		
		Heating	m³/min	33.5		29.1		
	Sound Level (SPL)	Cooling	dB(A)	44		46		
		Heating	dB(A)	50		50		
	Sound Level (PWL)	Cooling	dB(A)	59		61		
	Operating Current	Cooling	A	4.9		5.6		
		Heating	A	4.6		5.8		
	Breaker Size		A	15		25		
	Ext. Piping	Port Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2		6.35 x 3 / 9.52 x 3	
		Total Piping Length (max)		m	30		50	
		Each Indoor Unit Piping Length (max)		m	20		25	
Max. Height			m	15 (10)*3		15 (10)*3		
Chargeless Length			m	30		40		
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46				
		Heating	°C	-15 ~ +24				

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max height is reduced to 10m.

*4 EER/COP, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2HA40VF MSZ-HR25VF + MSZ-HR25VF

MXZ-2HA50VF MSZ-HR25VF + MSZ-HR25VF

MXZ-3HA50VF MSZ-HR25VF + MSZ-HR25VF + MSZ-HR25VF

PUMY-SP SERIES


Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.



R410A

PUMY-SP112/125/140VKM(-BS)
PUMY-SP112/125/140YKM(-BS)

EXAMPLE SYSTEM

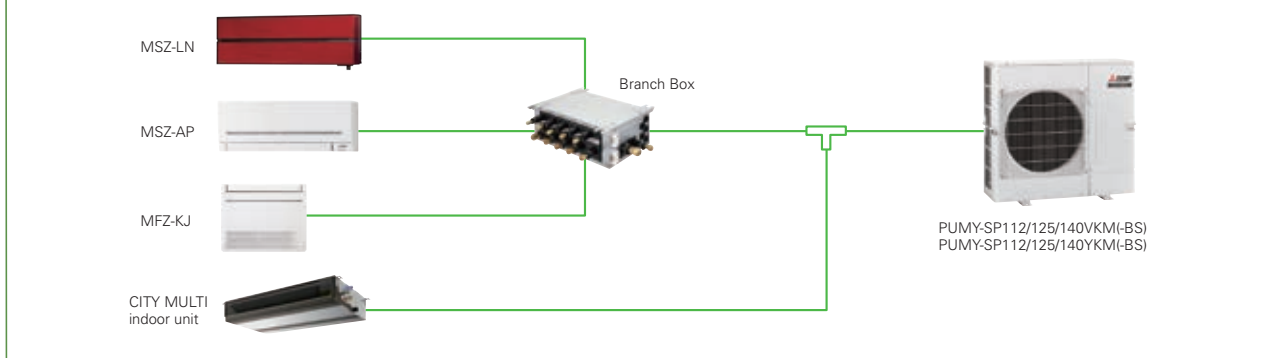

Light weight and compact size

Compact design fits into narrow outdoor unit space of condominiums and offices. Light weight design facilitates easy installation and transportation.



PUMY-P112/125/140YKM4(-BS)

Height 1,338mm
Weight 125kg




PUMY-SP112/125/140YKM(-BS)

Height 981mm **27% reduction**
Weight 94kg **25% reduction**


Unobstructive, compact, and easy to hide from view

Conventional 2-fan type outdoor units may spoil the view. Due to its compact size, the new outdoor fan unit can be installed in locations that would have been inappropriate.

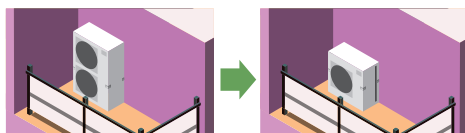

Easy installation and transportation


The reduced weight and height allow for better transportation performance. Carrying and installing become easier.

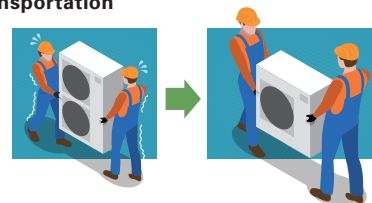

Industry's top energy efficiency*

Even with its compact size and light weight, it has a high EER and COP. Costs are reduced with the industry's best energy saving abilities.

* As of sep.2017.Among VRF outdoor unit of 1fan.
(An incompany investigation)

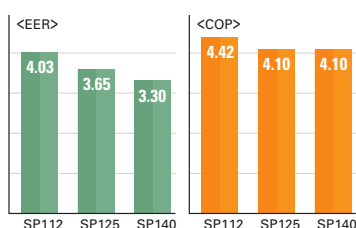

Super silent mode*

Noise level can be reduced up to 10dB(A). This allows you to operate the unit even in the night in a residential zone.

*Capacity reduction differs by mode setting.


*PAC-SC36NA-E is required to activate Super Silent mode.

Rear piping is available

Freedom with layout due to its piping pullout locations in four directions

The in-door unit allows piping from any four directions; front, back, bottom, or right. This enables easier horizontal connection for collective layout.



The out-door unit with an expanded piping layout flexibility greatly improves piping workability.



An external static pressure of 30Pa

The installation location is flexible, thanks to its 30Pa static pressure. You can install it in locations that you could not before.

An external static pressure of 30Pa allows outdoor unit to be installed on balconies in high-rise building or spaces near louvers.



*Noise level will increase when using this function.

Model		PUMY-SP112VKM(-BS)	PUMY-SP125VKM(-BS)	PUMY-SP140VKM(-BS)	PUMY-SP112YKM(-BS)	PUMY-SP125YKM(-BS)	PUMY-SP140YKM(-BS)
Power Source		1-phase 220 - 230 - 240V 50Hz / 220V 60Hz			3-phase 380 - 400 - 415V 50Hz / 380V 60Hz		
Cooling Capacity (nominal)	^{*1} kW	12.5	14.0	15.5	12.5	14.0	15.5
	Power Input kW	3.10	3.84	4.70	3.10	3.84	4.70
	Current Input A	14.38 - 13.75 - 13.18 / 14.38	17.81 - 17.04 - 16.33 / 17.81	21.80 - 20.85 - 19.88 / 21.80	4.96 - 4.71 - 4.54 / 4.96	6.14 - 5.83 - 5.62 / 6.14	7.52 - 7.14 - 6.88 / 7.52
	EER kW/kW	4.03	3.65	3.30	4.03	3.65	3.30
Temp. Range of Cooling^{*4}	Indoor Temp. W.B.	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C	15.0 - +24.0°C
	Outdoor Temp. D.B.	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C
Heating Capacity (nominal)	^{*2} kW	14.0	16.0	16.5	14.0	16.0	16.5
	Power Input kW	3.17	3.90	4.02	3.17	3.90	4.02
	Current Input A	14.70 - 14.06 - 13.48 / 14.70	18.09 - 17.30 - 16.58 / 18.09	18.85 - 17.83 - 17.09 / 18.85	5.07 - 4.82 - 4.64 / 5.07	6.24 - 5.93 - 5.71 / 6.24	6.43 - 6.11 - 5.89 / 6.43
	COP kW/kW	4.42	4.10	4.10	4.42	4.10	4.10
Temp. Range of Heating	Indoor Temp. D.B.	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C
	Outdoor Temp. W.B.	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C	-20.0 - +15.0°C
Indoor Unit Connectable	Total Capacity	50 to 130% of outdoor unit capacity					
	Model / Quantity	City Multi	15 - 140 / 9	15 - 140 / 10	15 - 140 / 9	15 - 140 / 10	15 - 140 / 12
		Branch Box ^{*9}	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
		City Multi	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5
		Branch Box	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5
Mixed System	Branch Box 1 unit	City Multi	15 - 140 / 3 or 2 ^{*7}	15 - 140 / 3	15 - 140 / 3 or 2 ^{*7}	15 - 140 / 3	15 - 140 / 3
		Branch Box	15 - 100 / 7 or 8 ^{*7}	15 - 100 / 8	15 - 100 / 7 or 8 ^{*7}	15 - 100 / 8	15 - 100 / 8
Sound Pressure Level (Cooling / Heating)	dB <A>		52 / 54	53 / 56	54 / 56	52 / 54	53 / 56
			72	73	74	72	74
Sound Power Level (Cooling)	dB <A>		72	73	74	72	74
			72	73	74	72	74
Refrigerant Piping Diameter	Liquid Pipe	mm	9.52 Flare				
	Gas Pipe	mm	15.88 Flare				
Fan	Type x Quantity		Propeller Fan x 1				
	Air Flow Rate	m ³ /min	77	83	83	77	83
		L/s	1,283	1,383	1,383	1,283	1,383
		cfm	2,719	2,931	2,931	2,719	2,931
	Motor Output	kW	0.20				
Compressor	External Static Press.	Pa	0 Pa / 30 Pa ^{*8}				
	Type x Quantity		Twin rotary hermetic compressor x 1				
	Starting Method		Inverter				
	Motor Output	kW	3.1	3.5	3.7	3.1	3.5
External Dimensions (H x W x D)		mm	981x1,050x330 (+40)				
Net Weight		kg (lbs)	93 (205) ^{*5}		94 (207) ^{*6}		
Pre-Charged Quantity	Weight	kg	3.5	3.5	3.5	3.5	3.5
	CO₂ Equivalent	t	7.31	7.31	7.31	7.31	7.31
Max Added Quantity	Weight	kg	9.0	9.0	9.0	9.0	9.0
	CO₂ Equivalent	t	18.79	18.79	18.79	18.79	18.79

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference	External Static Press. (Outdoor Unit)
Cooling	27°C DB / 19°C WB	35°C	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa
Heating	20°C DB	7°C DB / 6°C WB	7.5m (24 - 9 / 16ft.)	0m (0ft)	0 Pa

*3 10 to 52°C; in case of connecting PKFY-P15/P20/P25VBM, PFFY-P20/P25/P32VKM, PFFY-P20/P25/P32VLE(R)M indoor unit and M series indoor unit with connection kit and M series, S series, and P series type indoor unit with branch box.

*4 Up to 11 units when connecting via 2 branch boxes.

*5 94 (207), for PUMY-SP112/125/140VKM-BS

*6 95 (209), for PUMY-SP112/125/140YKM-BS

*7 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable City Multi indoor units are 2.

*8 0 Pa as initial setting

*9 At least 2 indoor units must be connected when using branch box.

Type			Branch Box				
Model Name			PAC-MK53BC	PAC-MK33BC	PAC-MK53BCB	PAC-MK33BCB	
Connectable Number of Indoor Units			Max. 5	Max. 3	Max. 5	Max. 3	
Power Supply	Source		Outdoor power supply, Branch Box / Outdoor separate power supply				
	Outdoor (V/Phase/Hz)		1-phase, 220 - 230 - 240V, 50Hz				
Total Input		kW	0.003				
Operating Current		A	0.05				
Dimensions		H × W × D	mm 170 - 450 - 280				
Weight		kg	7.4	6.7	7.0	6.5	
Piping [diameter]	Branch [Indoor Side]	Liquid	mm 6.35 × 5	6.35 × 3	6.35 × 5	6.35 × 3	
		Gas	mm 9.52 × 4, 12.7 × 1	9.52 × 3	9.52 × 4, 12.7 × 1	9.52 × 3	
	Main [Outdoor Side]	Liquid	mm	9.52			
		Gas	mm	15.88			
	Connection Method		Flared			Brazed	
	Wiring	to Indoor Unit		3-wire + Earth wire			
to Outdoor Unit		3-wire + Earth wire					


<Branch box compatible table>

Outdoor unit	Branch box	PAC-MK31/51BC(B)	PAC-MK32/52BC(B)	PAC-MK33/53BC(B)
PUMY-SP112/125/140V/YKM.TH(-BS)		✓	N/A	N/A
PUMY-SP112/125/140V/YKMR1.TH(-BS)		N/A	N/A	✓

[SP112-140V/YKM(-BS)]

Refrigerant Piping Lengths	Maximum meters
Total length	120
Maximum allowable length	To City Multi indoor unit: 70
	Through Branch box: 80

Vertical differentials between units	Maximum meters
Indoor/outdoor (outdoor higher)	50
Indoor/outdoor (outdoor lower)	30
Indoor/indoor	15*

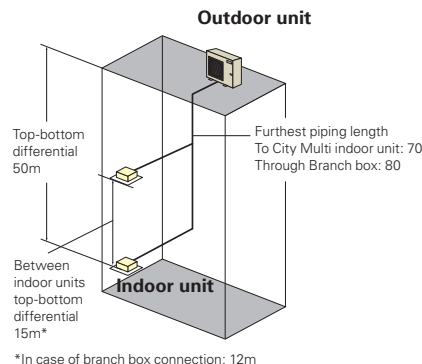

PUMY-P SERIES


Air conditioning system supports replacement work by simplifying the installation process. Ideal for supporting renewal needs at small offices and stores, home offices, etc.



R410A

PUMY-P112/125/140VKM4(-BS)
PUMY-P112/125/140YKM(E)4(-BS)
PUMY-P200YKM2(-BS)

EXAMPLE SYSTEM

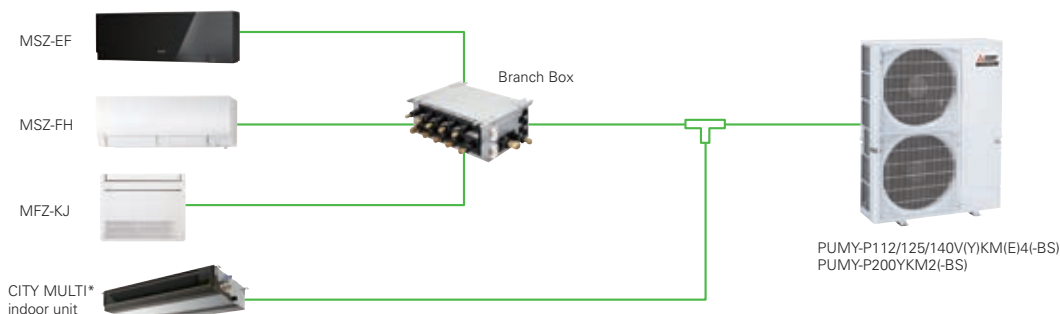


*In case of mix system (CITY MULTI indoor unit with Branch box), PKFY and PFFY series are not connectable. (P112/125/140)

The two-pipe zoned system designed for Heat Pump Operation


PUMY series make use of a two-pipe refrigerant system, which allows for system changeover from cooling to heating, ensuring that a constant indoor climate is maintained in all zones. The compact outdoor unit utilizes R410A refrigerant and an INVERTER-driven compressor to use energy effectively.

With a wide range of indoor unit line-up in connection with a flexible piping system, PUMY series can be configured for all applications. Up to 12 indoor units can be connected with up to 130% connected capacity to maximize engineer's design options. This feature allows easy air conditioning in each area with convenient individual controllers.

Small Offices

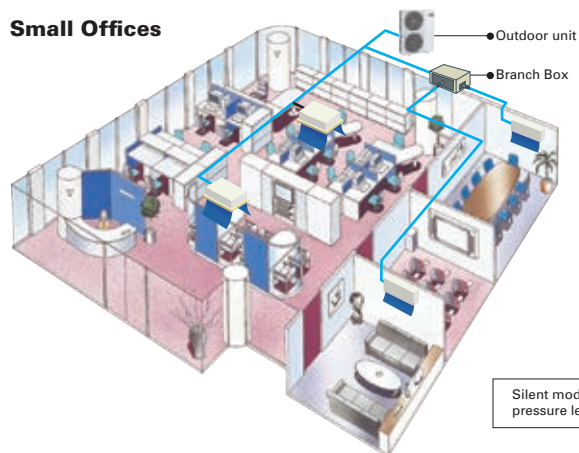

Residence

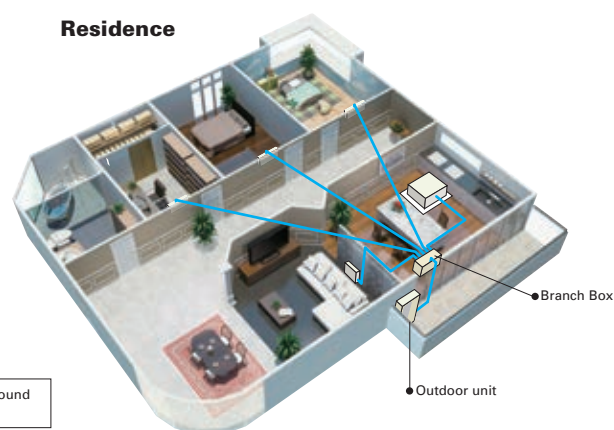

		Maximum Meters			
		Only City Multi ^{*1} Indoor Unit	Only Branch Box Connection	Mixed System (City Multi ^{*1} Indoor Unit + Branch Box)	
P112/125/140	Refrigerant Piping Length	Total Length	300	240 (2 Branch boxes) / 300 (1 Branch box)	
		Maximum Allowable Length	150 (175 equivalent)	85 (95 equivalent)	80
		Farthest Indoor From First Branch	30	30	55
	Vertical Differentials Between Units	Indoor/Outdoor (Outdoor higher)	50		50
		Indoor/Outdoor (Outdoor Lower)	40 ^{*2}		40
		Indoor/Indoor	15 ^{*3}		15 ^{*3}
P200	Refrigerant Piping Length	Total Length	150	80 (90 equivalent)	150
		Maximum Allowable Length	80 (90 equivalent)	80 (90 equivalent)	80
		Farthest Indoor From First Branch	30	30	55
	Vertical Differentials Between Units	Indoor/Outdoor (Outdoor higher)	50		50
		Indoor/Outdoor (Outdoor Lower)	40		40
		Indoor/Indoor	15 ^{*3}		15 ^{*3}

*1 Include system with connection kit

*2 In case of including PKFY or PFFY, height between units is 30m.

*3 In case of branch box connection: 12m


30Pa external static pressure* Option (requires PAC-SJ71FM-E)

An external static pressure of 30Pa enables the outdoor unit to be installed on balconies in high-rise building or spaces near louvers.

* PUMY-P112/125/140VKM4(-BS), PUMY-P112/125/140YKM(E)4(-BS) only.

* Noise level will increase when using this function.

30Pa external static pressure fan motor (option)
(PAC-SJ71FM-E)





Model			PUMY-P112VKM4(-BS)	PUMY-P125VKM4(-BS)	PUMY-P140VKM4(-BS)	PUMY-P112YKM4(-BS)	PUMY-P125YKM4(-BS)	PUMY-P140YKM4(-BS)	PUMY-P200YKM2(-BS)	
Power Source			1-phase 220 - 230 - 240V 50Hz			3-phase 380 - 400 - 415V 50Hz				
Cooling Capacity (nominal)	*1		kW	12.5	14.0	15.5	12.5	14.0	15.5	22.4
	Power Input		kW	2.79	3.46	4.52	2.79	3.46	4.52	6.05
	Current Input		A	12.87 - 12.32 - 11.80	15.97 - 15.27 - 14.64	20.86 - 19.95 - 19.12	4.99 - 4.74 - 4.57	5.84 - 5.55 - 5.35	7.23 - 6.87 - 6.62	9.88 - 9.39 - 9.05
	EER		kW/kW	4.48	4.05	3.43	4.48	4.05	3.43	3.70
Temp. Range of Cooling	Indoor Temp.		W.B.	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C	15.0 - 24.0°C
	Outdoor Temp.*3		D.B.	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C	-5.0 - 52.0°C
Heating Capacity (nominal)	*2		kW	14.0	16.0	18.0	14.0	16.0	18.0	25.0
	Power Input		kW	3.04	3.74	4.47	3.04	3.74	4.47	5.84
	Current Input		A	14.03 - 13.42 - 12.86	17.26 - 16.51 - 15.82	20.63 - 19.73 - 18.91	5.43 - 5.16 - 4.98	6.31 - 6.00 - 5.78	7.15 - 6.79 - 6.55	9.54 - 9.06 - 8.74
	COP		kW/kW	4.61	4.28	4.03	4.61	4.28	4.03	4.28
Temp. Range of Heating	Indoor Temp.		D.B.	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C	15.0 - 27.0°C
	Outdoor Temp.		W.B.	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C	-20.0 - 15.0°C
Indoor Unit Connectable	Total Capacity		50 to 130% of outdoor unit capacity							
	Model / Quantity		City Multi	15 - 140 / 9	15 - 140 / 10	15 - 140 / 12	15 - 140 / 9	15 - 140 / 10	15 - 140 / 12	15 - 200 / 12
			Branch Box*5	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
	Mixed System	Branch Box 1 unit	City Multi	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 140 / 5	15 - 200 / 5
			Branch Box	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5	15 - 100 / 5
		Branch Box 2 units	City Multi	15 - 140 / 3 or 2**4	15 - 140 / 3	15 - 140 / 3	15 - 140 / 3 or 2**4	15 - 140 / 3	15 - 140 / 3	15 - 200 / 3
Branch Box			15 - 100 / 7 or 8**4	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8	15 - 100 / 7 or 8**4	15 - 100 / 8	15 - 100 / 8	15 - 100 / 8
Sound Pressure Level (measured in anechoic room)			dB <A>	49 / 51	50 / 52	51 / 53	49 / 51	50 / 52	51 / 53	56 / 61
Refrigerant Piping Diameter	Liquid Pipe		mm	9.52 Flare						9.52**6 Flare
	Gas Pipe		mm	15.88 Flare						19.1 Flare
Fan	Type x Quantity		Propeller Fan x 2							
	Air Flow Rate		m³/min	110						139
			L/s	1,883						2,316
			cfm	3,884						4,908
	Motor Output		kW	0.074 + 0.074						0.20 + 0.20
Compressor	Type x Quantity		Scroll hermetic compressor x 1							
	Starting Method		Inverter							
	Motor Output		kW	2.9	3.5	3.9	2.9	3.5	3.9	5.3
External Dimensions (H x W x D)			mm							
Weight			kg	122				125		141

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*3 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM and PFFY-P20/25/32VLE(R)M, PEFY-P-VMA3, M, S and P series indoor unit.

*4 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

*5 At least 2 indoor units must be connected when using branch box.

*6 Liquid pipe diameter: 12.7mm when piping length is more than 60m.

Model			PUMY-P112YKME4(-BS)		PUMY-P125YKME4(-BS)		PUMY-P140YKME4(-BS)			
Power Source			3-phase 380 - 400 - 415V 50Hz							
Cooling Capacity (nominal)	*1		kW		12.5		14.0		15.5	
	Power Input		kW		2.79		3.46		4.52	
	Current Input		A		4.99 / 4.74 / 4.57		5.84 / 5.55 / 5.35		7.23 / 6.87 / 6.62	
	EER		kW/kW		4.48		4.05		3.43	
Temp. Range of Cooling	Indoor Temp.		W.B.		15 to 24°C					
	Outdoor Temp.*3		D.B.		-5 to 52°C					
Heating Capacity (nominal)	*2		kW		14.0		16.0		18.0	
	Power Input		kW		3.04		3.74		4.47	
	Current Input		A		5.43 / 5.16 / 4.98		6.31 / 6.00 / 5.78		7.15 / 6.79 / 6.55	
	COP		kW/kW		4.61		4.28		4.03	
Temp. Range of Heating	Indoor Temp.		D.B.		15 to 27°C					
	Outdoor Temp.		W.B.		-20 to 15°C					
Indoor Unit Connectable	Total Capacity		50 to 130% of outdoor unit capacity							
	Model / Quantity		City Multi		15 - 140 / 9		15 - 140 / 10		15 - 140 / 12	
			Branch Box*5		15 - 100 / 8		15 - 100 / 8		15 - 100 / 8	
	Mixed System	Branch Box 1 unit	City Multi		15 - 140 / 5		15 - 140 / 5		15 - 140 / 5	
			Branch Box		15 - 100 / 5		15 - 100 / 5		15 - 100 / 5	
		Branch Box 2 units	City Multi		15 - 140 / 3 or 2*4		15 - 140 / 3		15 - 140 / 3	
			Branch Box		15 - 100 / 7 or 8*4		15 - 100 / 8		15 - 100 / 8	
Sound Pressure Level (measured in anechoic room)			dB <A>		49 / 51		50 / 52		51 / 53	
Refrigerant Piping Diameter	Liquid Pipe		mm		9.52 Flare					
	Gas Pipe		mm		15.88 Flare					
Fan	Type x Quantity		Propeller Fan x 2							
	Air Flow Rate		m³/min		110					
			L/s		1,833					
			cfm		3,884					
	Motor Output		kW		0.074 + 0.074					
Compressor	Type x Quantity		Scroll hermetic compressor x 1							
	Starting Method		Inverter							
	Motor Output		kW		2.9		3.5		3.9	
External Dimensions (H x W x D)			mm		1,338×1,050×330 (+40)					
Weight			kg		136					

*1, *2 Nominal conditions

	Indoor	Outdoor	Piping Length	Level Difference
Cooling	27°C DB / 19°C WB	35°C	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*3 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM and PFFY-P20/25/32VLE(R)M, PEFY-P-VMA3, M, S and P series indoor unit.

*4 When connecting 7 indoor units via branch box, connectable City Multi indoor units are 3; connecting 8 indoor units via branch box, connectable indoor units are 2.

*5 At least 2 indoor units must be connected when using branch box.

Type				Branch Box			
Model Name				PAC-MK53BC	PAC-MK33BC	PAC-MK53BCB	PAC-MK33BCB
Connectable Number of Indoor Units				Max. 5	Max. 3	Max. 5	Max. 3
Power Supply	Source			Outdoor power supply, Branch Box / Outdoor separate power supply			
	Outdoor (V/Phase/Hz)			1-phase, 220/230/240V, 50Hz, 1-phase, 220V, 60Hz			
Total Input			kW	0.003			
Operating Current			A	0.05			
Dimensions			H x W x D	mm 170 - 450 - 280			
Weight			kg	7.4	6.7	7.0	6.5
Piping [diameter]	Branch [Indoor Side]	Liquid	mm	6.35 x 5	6.35 x 3	6.35 x 5	6.35 x 3
		Gas	mm	9.52 x 4, 12.7 x 1	9.52 x 3	9.52 x 4, 12.7 x 1	9.52 x 3
	Main [Outdoor Side]	Liquid	mm	9.52			
		Gas	mm	15.88			
	Connection Method			Flared			Brazed
	Wiring	to Indoor Unit			3-wire + Earth wire		
to Outdoor Unit			3-wire + Earth wire				

Indoor Unit Compatibility Table

■ MXZ Series **R32**

Possible combinations of outdoor units and indoor units are shown below.

Indoor Unit			Outdoor Unit	Inverter Models Heat pump type								
				MXZ-2F33VF ³	MXZ-2F42VF ³	MXZ-2F53VF(H) ³	MXZ-3F54VF ³	MXZ-3F68VF ³	MXZ-4F72VF ³	MXZ-4F80VF ³	MXZ-2HA40VF ³	MXZ-2HA50VF ³
M series	Wall-Mounted	MSZ-LN18VG(W)(V)(R)(B)				●	●	●	●			
		MSZ-LN25VG(W)(V)(R)(B)				●	●	●	●			
		MSZ-LN35VG(W)(V)(R)(B)				●	●	●	●			
		MSZ-LN50VG(W)(V)(R)(B)										
		MSZ-LN18VG2(W)(V)(R)(B)	●	●	●	●	●	●	●			
		MSZ-LN25VG2(W)(V)(R)(B)	●	●	●	●	●	●	●			
		MSZ-LN35VG2(W)(V)(R)(B)		●	●	●	●	●	●			
		MSZ-LN50VG2(W)(V)(R)(B)				●	●	●	●			
		MSZ-AP15VG	●	●	●	●	●	●	●			
		MSZ-AP20VG	●	●	●	●	●	●	●			
		MSZ-AP25VG	●	●	●	●	●	●	●			
		MSZ-AP35VG		●	●	●	●	●	●			
		MSZ-AP42VG			●	●	●	●	●			
		MSZ-AP50VG			●	●	●	●	●			
		MSZ-AP60VG					●	●	●			
		MSZ-EF18VG(W)(B)(S)	●	●	●	●	●	●	●			
		MSZ-EF22VG(W)(B)(S)	●	●	●	●	●	●	●			
		MSZ-EF25VG(W)(B)(S)	●	●	●	●	●	●	●			
		MSZ-EF35VG(W)(B)(S)		●	●	●	●	●	●			
		MSZ-EF42VG(W)(B)(S)			●	●	●	●	●			
		MSZ-EF50VG(W)(B)(S)			●	●	●	●	●			
		MSZ-BT20VG	●	●	●	●	●	●	●			
		MSZ-BT25VG	●	●	●	●	●	●	●			
		MSZ-BT35VG		●	●	●	●	●	●			
		MSZ-BT50VG										
		MSZ-HR25VF								●	●	●
		MSZ-HR35VF								●	●	●
		MSZ-HR42VF									●	●
		MSZ-HR50VF										●
	Floor-Standing	MFZ-KT25VG	●	●	●	●	●	●	●			
		MFZ-KT35VG		●	●	●	●	●	●			
		MFZ-KT50VG				●	●	●	●			
	1-way Cassette	MLZ-KP25VF	●	●	●	●	●	●	●			
		MLZ-KP35VF		●	●	●	●	●	●			
		MLZ-KP50VF				●	●	●	●			
S series	2x2 Cassette	SLZ-M15FA	●	●	●	●	●	●	●			
		SLZ-M25FA	●	●	●	●	●	●	●			
		SLZ-M35FA		●	●	●	●	●	●			
		SLZ-M50FA				●	●	●	●			
	Ceiling-Concealed	SEZ-M25DA ^{*2}	●	●	●	●	●	●	●			
		SEZ-M25DAL ^{*2}	●	●	●	●	●	●	●			
		SEZ-M35DA		●	●	●	●	●	●			
		SEZ-M35DAL		●	●	●	●	●	●			
		SEZ-M50DA				●	●	●	●			
		SEZ-M50DAL				●	●	●	●			
		SEZ-M60DA					●	●	●			
		SEZ-M60DAL					●	●	●			
		SEZ-M71DA										
		SEZ-M71DAL										
P series	Ceiling-Suspended	PCA-M50KA				●	●	●	●			
		PCA-M60KA					●	●	●			
		PCA-M71KA										
	Ceiling-Concealed	PEAD-M50JA				● ^{*1}	● ^{*1}	● ^{*1}	●			
		PEAD-M50JAL				● ^{*1}	● ^{*1}	● ^{*1}	●			
		PEAD-M60JA										
		PEAD-M60JAL										
		PEAD-M71JA										
PEAD-M71JAL												

*1 Maximum total current of indoor units: 3A or less.

*2 SEZ-M25 cannot be connected with MXZ-2F/3F/4F when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

*3 MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

MXZ Series **R410A**

Possible combinations of outdoor units and indoor units are shown below.

Indoor Unit			Outdoor Unit	Inverter Models Heat pump type												
			MXZ- ^{*3} 2D33VA	MXZ- ^{*3} 2D42VA2	MXZ- ^{*3} 2D53VA(H)2	MXZ- ^{*3} 2E53VAHZ	MXZ- ^{*3} 3E54VA	MXZ- ^{*3} 3E68VA	MXZ- ^{*3} 4E72VA	MXZ- ^{*3} 4E83VA	MXZ- ^{*3} 4E83VAHZ	MXZ- ^{*3} 5E102VA	MXZ- ^{*3} 6D122VA2	MXZ- ^{*3} 2DM40VA	MXZ- ^{*3} 3DM50VA	
M series	Wall-Mounted	MSZ-LN18VG(W)(V)(R)(B)														
		MSZ-LN25VG(W)(V)(R)(B)	●	●	●	●	●	●	●	●	●	●				
		MSZ-LN35VG(W)(V)(R)(B)		●	●	●	●	●	●	●	●	●	●			
		MSZ-LN50VG(W)(V)(R)(B)														
		MSZ-AP15VG	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP20VG	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP25VG ^{*7}	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-AP35VG ^{*7}		●	●	●	●	●	●	●	●	●	●			
		MSZ-AP42VG ^{*7}			●	●	●	●	●	●	●	●	●			
		MSZ-AP50VG ^{*7}			●	●	●	●	●	●	●	●	●			
		MSZ-FH25VE2	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-FH35VE2		●	●	●	●	●	●	●	●	●	●			
		MSZ-FH50VE2					●	●	●	●	●	●	●			
		MSZ-EF18VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF22VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF25VG(W)(B)(S)	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-EF35VG(W)(B)(S)		●	●	●	●	●	●	●	●	●	●			
		MSZ-EF42VG(W)(B)(S)			●	●	●	●	●	●	●	●	●			
		MSZ-EF50VG(W)(B)(S)			●	●	●	●	●	●	●	●	●			
		MSZ-SF15VA	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-SF20VA	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-SF25VE3	●	●	●	●	●	●	●	●	●	●	●			
		MSZ-SF35VE3		●	●	●	●	●	●	●	●	●	●			
		MSZ-SF42VE3			●	●	●	●	●	●	●	●	●			
		MSZ-SF50VE3			●	●	●	●	●	●	●	●	●			
		MSZ-GF60VE2						●	●	●	●	●	●			
		MSZ-GF71VE2							●	●	●	●	●			
		MSZ-DM25VA													●	●
	MSZ-DM35VA													●	●	
	MSZ-HJ25VA													●	●	
	MSZ-HJ35VA													●	●	
	MSZ-HJ50VA														●	
	Floor-Standing	MFZ-KJ25VE2	● ^{*4*5}	● ^{*4}	● ^{*4}	●	● ^{*4}	● ^{*4}	●	●	●	●	●			
		MFZ-KJ35VE2		● ^{*4}	● ^{*4}	●	● ^{*4}	● ^{*4}	●	●	●	●	●			
		MFZ-KJ50VE2					● ^{*4}	● ^{*4}	●	●	●	●	●			
		MLZ-KP25VF	●	●	●	●	●	●	●	●	●	●	●			
		MLZ-KP35VF		●	●	●	●	●	●	●	●	●	●			
1-way Cassette	MLZ-KP50VF					●	●	●	●	●	●	●				
	SLZ-M15FA															
	SLZ-M25FA	●	●	●	●	●	●	●	●	●	●	●				
2x2 Cassette	SLZ-M35FA		●	●	●	●	●	●	●	●	●	●				
	SLZ-M50FA					●	●	●	●	●	●	●				
	SEZ-M25DA ^{*2}	●	●	●	●	●	●	●	●	●	●	●				
	SEZ-M25DAL ^{*2}	●	●	●	●	●	●	●	●	●	●	●				
	SEZ-M35DA		●	●	●	●	●	●	●	●	●	●				
	SEZ-M35DAL		●	●	●	●	●	●	●	●	●	●				
	SEZ-M50DA					●	●	●	●	●	●	●				
	SEZ-M50DAL					●	●	●	●	●	●	●				
	SEZ-M60DA						●	●	●	●	●	●				
	SEZ-M60DAL						●	●	●	●	●	●				
	SEZ-M71DA								●	●	●	●				
	SEZ-M71DAL								●	●	●	●				
	P series	4-way Cassette	PLA-M50EA					●	●	●	●	●	●	●		
			PLA-M60EA						●	●	●	● ^{*6}	●	●		
PLA-M71EA									●	●	● ^{*6}	●	●			
Ceiling-Suspended		PCA-M50KA					●	●	●	●	● ^{*6}	●	●			
		PCA-M60KA						●	●	●	● ^{*6}	●	●			
		PCA-M71KA							●	●	● ^{*6}	●	●			
Ceiling-Concealed		PEAD-M50JA					● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M50JAL					● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M60JA								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M60JAL								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M71JA								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			
		PEAD-M71JAL								● ^{*1}	● ^{*1*6}	● ^{*1}	● ^{*1}			

^{*1} Maximum total current of indoor units: 3A or less.

^{*2} SEZ-KD25 cannot be connected with MXZ-2D(E)/3E/4E/5E when total capacity of connected indoor units is equivalent to outdoor capacity (capacity ratio is 1).

^{*3} MXZ outdoor units are not designed to operate with a single indoor unit with one-to-one piping work. Please install at least two indoor units.

^{*4} When connecting the MFZ-KJ Series indoor unit, additional refrigerant is required. For details, please refer to page 104.

^{*5} Regarding MXZ-2D33, the second unit should be a different type in the case of selecting one MFZ-KJ.

^{*6} P series cannot be connected with MXZ-4E83VAHZ when ampere limit adjustment function is operated.

^{*7} Connectable outdoor unit are MXZ-2D33VA-E4, MXZ-2D42VA2-E4, MXZ-2D53VA2-E4, MXZ-2E53VAHZ-E2, MXZ-3E54VA-E2, MXZ-3E68VA-E2, MXZ-4E72VA-E2, MXZ-4E83VA-E4, MXZ-4E83VAHZ-E3, MXZ-5E102VA-E4.

■ PUMY-SP Series

Branch Box Connection Compatibility Table

Series	Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG					●	●		●*1			
		MSZ-AP•VG	●*1		●*1		●*1	●*1	●*1	●*1			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●*1		●*1	●*1	●*1	●*1	●*1			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
		MSZ-GF•VE2									●	●	
S series	Floor-Standing	MFZ-KJ•VE2					●*1	●*1		●*1			
	1-way Cassette	MLZ-KP•VF					●*1	●*1		●*1			
P series	Ceiling-Concealed	SEZ-M•DA(L)					●*1	●*1		●*1	●*1	●*1	
	2x2 Cassette	SLZ-M•FA	●*1				●*1	●*1		●*1			
P series	Ceiling-Suspended	PCA-M•KA						●		●	●	●	●
	4-way Cassette	PLA-M•EA						●*1		●*1	●*1	●*1	●*1
	Ceiling-Concealed	PEAD-M•JA(L)								●*1	●*1	●*1	●*1

*1 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR1(-BS).TH only.

LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity									
			15	18	20	22	25	35	42	50	60	71
M series	Wall-Mounted	MSZ-LN•VG					●	●		●		
		MSZ-AP•VG	●*1		●*1		●*1	●*1	●*1	●*1		
		MSZ-FH•VE2					●	●		●		
		MSZ-EF•VG		●		●	●	●	●	●		
		MSZ-SF•VA	●		●							
		MSZ-SF•VE3					●	●	●	●		

*1 Connectable outdoor units are PUMY-SP112/125/140V(Y)KMR1(-BS).TH only.

CITY MULTI Indoor Unit Compatibility Table

Series	Type	Model Name	Capacity												
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140
CITY MULTI series	1-way Cassette	PMFY-P•VBM-E			●	●	●	●							
	2-way Cassette	PLFY-P•VLM-D-E			●	●	●	●	●	●		●	●	●	
	4-way Cassette	PLFY-P•VEM-E			●	●	●	●	●	●		●	●	●	
		PLFY-EP•VEM-E *3							●	●		●			
	2x2 Cassette	PLFY-P•VFM-E1		●	●	●	●	●	●						
	Ceiling Concealed	PEFY-P•VMS1(L)-E		●	●	●	●	●	●	●					
		PEFY-P•VMA(L)-E3 *2			●	●	●	●	●	●	●	●	●	●	●
		PEFY-P•VMA3-E *1				●	●	●							
		PEFY-P•VMH-E						●	●	●	●	●	●	●	●
		PEFY-P•VMR-E-L/R			●	●	●								
		PEFY-P•VMH-E-F										●			●
	Ceiling Suspended	PCFY-P•VKM-E						●		●			●	●	
	Wall Mounted	PKFY-P•VLM-E	●	●	●	●	●	●	●						
		PKFY-P•VKM-E								●			●		
	Floor Standing	PFFY-P•VLEM-E			●	●	●	●	●	●					
	Floor Mounted	PFFY-P•VKM-E2			●	●	●	●							
Concealed	PFFY-P•VLRM-E			●	●	●	●	●	●						
Lossnay	GUF•RD(H)4 *2							●				●			

*1 Authorized connectable indoor units are as follows;

PUMY-SP112: PEFY-P25x2+P32x2, PUMY-SP125: PEFY-P25x1+P32x3, PUMY-SP140: PEFY-P32x2+P40x2

*2 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

*3 PLFY-EP can not connect more than 3units

■ PUMY-P Series

Branch Box Connection Compatibility Table

Series	Type	Model Name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-Mounted	MSZ-LN•VG					●	●		●			
		MSZ-AP•VG	●		●		●	●	●	●			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●		●	●	●	●	●			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
		MSZ-GF•VE2									●	●	
S series	Floor-Standing	MFZ-KJ•VE2					●	●		●			
	1-way Cassette	MLZ-KP•VF					●	●		●			
P series	Ceiling-Concealed	SEZ-M•DA(L)					●	●		●	●	●	
	2x2 Cassette	SLZ-M•FA	●				●	●		●			
P series	Ceiling-Suspended	PCA-M•KA						●		●	●	●	●
	4-way Cassette	PLA-M•EA						●		●	●	●	●
	Ceiling-Concealed	PEAD-M•JA(L)								●	●	●	●

LEV Kit Connection Compatibility Table

Series	I/U Type	Model Name	Capacity									
			15	18	20	22	25	35	42	50	60	71
M series	Wall-Mounted	MSZ-LN•VG					●	●		●		
		MSZ-AP•VG	●		●		●	●	●	●		
		MSZ-FH•VE2					●	●		●		
		MSZ-EF•VG		●		●	●	●	●	●		
		MSZ-SF•VA	●		●							
		MSZ-SF•VE3					●	●	●	●		
P series	Floor-Standing	MFZ-KJ•VE2					●	●		●		

CITY MULTI Indoor Unit Compatibility Table

Series	Type	Model Name	Capacity												
			P10	P15	P20	P25	P32	P40	P50	P63	P71	P80	P100	P125	P140
CITY MULTI series	1-way Cassette	PMFY-P•VBM-E			●	●	●	●							
	2-way Cassette	PLFY-P•VLM-E			●	●	●	●	●	●		●	●	●	
	4-way Cassette	PLFY-P•VEM-E			●	●	●	●	●	●		●	●	●	
		PLFY-EP•VEM-E*4							●	●		●			
	2x2 Cassette	PLFY-P•VFM-E1		●	●	●	●	●	●						
	Ceiling Concealed	PEFY-P•VMS1(L)-E	●	●	●	●	●	●	●	●					
		PEFY-P•VMA(L)-E3			●	●	●	●	●	●	●	●	●	●	●
		PEFY-P•VMA3-E*1				●	●	●	●	●					
		PEFY-P•VMH-E						●	●	●	●	●	●	●	●
		PEFY-P•VMR-E-L/R			●	●	●								
		PEFY-P•VMH-E-F										●			●
	Ceiling Suspended	PCFY-P•VKM-E						●					●	●	
	Wall Mounted	PKFY-P•VLM-E	●	●	●	●	●	●							
		PKFY-P•VKM-E								●			●		
	Floor Standing Floor Mounted Concealed	PFFY-P•VLEM-E			●	●	●	●	●	●					
		PFFY-P•VKM-E2			●	●	●	●							
		PFFY-P•VLRM-E			●	●	●	●	●	●					
		PFFY-P•VLRMM-E			●	●	●	●	●	●					
	Air to Water unit	PWFY-P•VM-E1/E2-AU*2											●		
	Lossnay	GUF•RD(H)4*3							●				●		

*1 Authorized connectable indoor units are as follows;

PUMY-P112: PEFY-P25x2+P32x2, PUMY-P125: PEFY-P32x4, PUMY-P140: PEFY-P32x3+P40x1, PUMY-P200YKM2: PEFY-P40x2+P63x2

*2 Note that connection is not allowed inside EU countries.

PWFY can not connect to PUMY-P200YKM2.


*3 Do not connect Lossnay remote controller(s). (PZ-61DR-E, PZ-60DR-E, PZ-52SF-E, PZ-43SMF-E)

*4 PUMY-P112/125/140: PEFY-EP can not connect more than 3 units

PUMY-P200: Authorized connectable indoor units are only as follows; PLFY-EP63VEM-E x3.

POWERFUL HEATING

SERIES



SELECTION

Choose the series that best matches the building layout.

MSZ-LN VGHZ, MSZ-FT/MFZ-KJ VEHZ SERIES

The line-up includes outdoor models 25–50

Outdoor Unit



R32
R410A

MUZ-LN25/35VGHZ2
MUZ-FT25/35VGHZ
MUFZ-KJ25/35VEHZ



R32
R410A

MUZ-LN50VGHZ2
MUZ-FT50VGHZ
MUFZ-KJ50VEHZ


Indoor Unit

Wall-mounted



R32
R410A

MSZ-LN25/35/50VG2
(W)(V)(R)(B)



R32
MSZ-FT25/35/50VGK

Floor-standing




R410A
MFZ-KJ25/35/50VE2

ZUBADAN

ZUBADAN SERIES

The line-up includes outdoor unit models 112-140 class and three types of indoor units.

Outdoor Unit



R410A

PUAZ-SHW112VHA
PUAZ-SHW112/140YHA

Indoor Unit

4-way cassette



PLA Series


Wall-mounted



PKA Series

Ceiling-concealed

R32
R410A

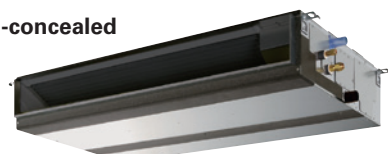

PEAD Series

R32
R410A

MXZ-VFHZ SERIES

Outdoor Unit

R32



MXZ-2F53VFHZ

R32



MXZ-4F83VFHZ

MXZ-VAHZ SERIES

R410A



MXZ-2E53VAHZ

R410A



MXZ-4E83VAHZ


VGHZ

R32
Single / Multi


R410A
Multi

SERIES

Unlike conventional air conditioning systems, the LN Series and FT Series don't lose heating capacity when it's cold outside. Original technologies ensure excellent heating performance under extremely low outdoor temperatures and an impressive guaranteed operating range.

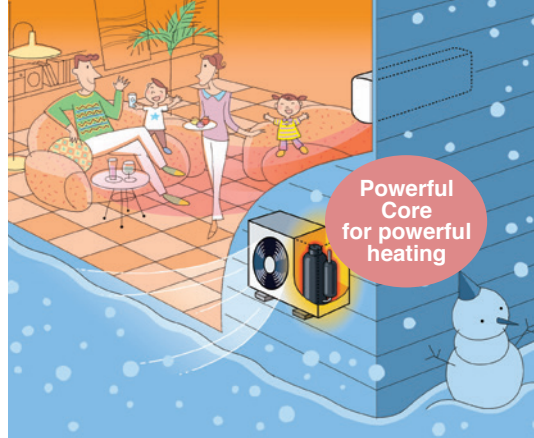


MSZ-LN25/35/50VG2(W)(V)(R)(B)




MSZ-FT25/35/50VGK

Unparalleled Heating Performance

LN Series and FT Series outdoor units are equipped with a high-output compressor that provides enhanced heating performance under low outdoor temperatures. The heating operation range is extended down to -25°C.

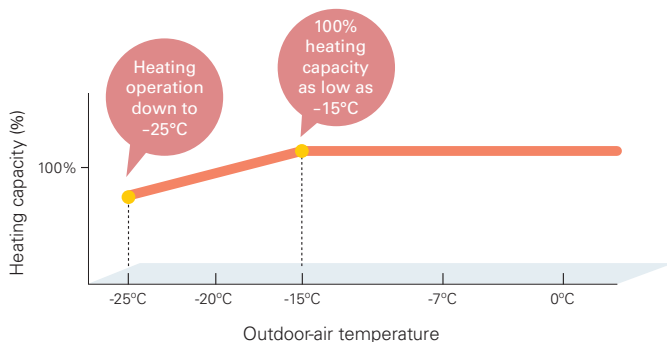


Declared Capacity (at reference design temperature)

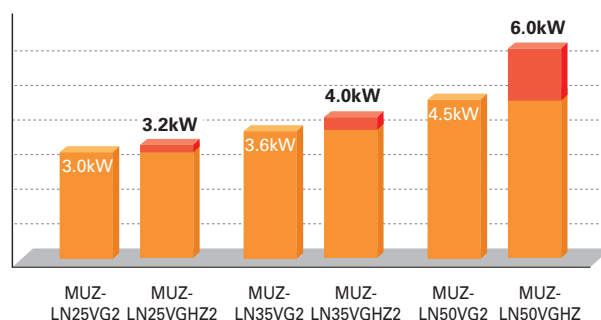


Compact, Powerful Compressor

A special manufacturing technology, "Heat Caulking Fixing Method," has been introduced to reduce compressor size while maintaining a high compressor output. This technology enables the installation of a powerful compressor in compact MUZ outdoor units. As a result, excellent heating performance is achieved when operating in cold outdoor environments.

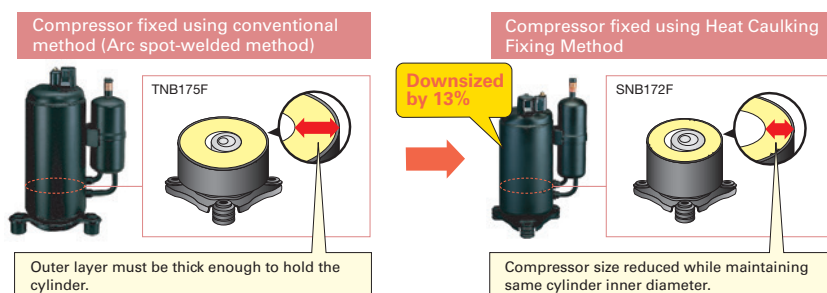

High Energy Efficiency – Energy Rank of A⁺ or higher for All Models

With indoor units that combine functionality, design and capacity and outdoor units equipped with a high-efficiency compressor, the MUZ-LN VGHZ and MUZ-FT VGHZ simultaneously achieves high heating capacity and energy-saving performance.

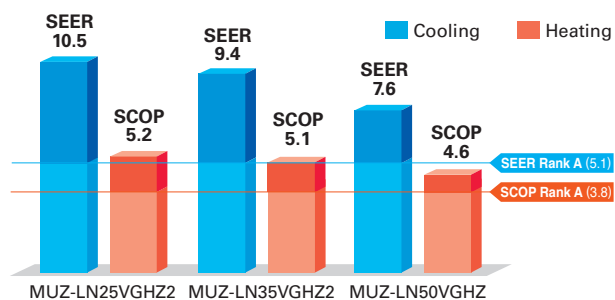

Freeze-prevention Heater Equipped as Standard

The Freeze-prevention heater restricts lowered capacity and operation shutdowns caused by the drain water freezing. This supports stable operation in low-temperature environments.

Operation Guaranteed at
Outside Temperature of -25°C



Without Freeze-prevention heater



With Freeze-prevention heater

MSZ-LN VGHZ SERIES



Indoor Unit / Remote Controller



<Pearl White>



MSZ-LN25/35/50VG2V

<Ruby Red>



MSZ-LN25/35/50VG2R

<Natural White>



MSZ-LN25/35/50VG2W

<Onyx Black>



MSZ-LN25/35/50VG2B

Outdoor Unit



MUZ-LN25/35VGHZ2



MUZ-LN50VGHZ



Type			Inverter Heat Pump				
Indoor Unit			MSZ-LN25VG(W)(V)(R)(B)	MSZ-LN35VG(W)(V)(R)(B)	MSZ-LN50VG(W)(V)(R)(B)		
Outdoor Unit			MUZ-LN25VGHZ	MUZ-LN35VGHZ	MUZ-LN50VGHZ		
Refrigerant			R32 (*1)				
Power Supply	Source		Outdoor Power supply				
	Outdoor (V/Phase/Hz)		230/Single/50				
Cooling	Design Load		kW	2.5	3.5	5.0	
	Annual Electricity Consumption (*2)		kWh/a	83	130	230	
	SEER (*4)			10.5	9.4	7.6	
	Energy Efficiency Class			A+++	A+++	A++	
	Capacity	Rated	kW	2.5	3.5	5.0	
		Min - Max	kW	0.8 - 3.5	0.8 - 4.0	1.4 - 5.8	
	Total Input	Rated	kW	0.485	0.820	1.380	
Heating (Average Season)*5	Design Load		kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)	
	Declared Capacity	at reference design temperature	kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)	
		at bivalent temperature	kW	3.2 (-10°C)	4.0 (-10°C)	6.0 (-10°C)	
		at operation limit temperature	kW	2.3 (-25°C)	3.1 (-25°C)	4.7 (-25°C)	
	Back Up Heating Capacity		kW	0.0 (-10°C)	0.0 (-10°C)	0.0 (-10°C)	
	Annual Electricity Consumption (*2)		kWh/a	861	1098	1826	
	SCOP (*4)			5.2	5.1	4.6	
		Energy Efficiency Class		A+++	A+++	A++	
	Capacity	Rated	kW	3.2	4.0	6.0	
		Min - Max	kW	0.8 - 6.3	0.9 - 6.6	1.8 - 8.7	
	Total Input	Rated	kW	0.600	0.820	1.480	
	Operating Current (max)			A	9.9	10.5	15.2
Indoor Unit	Input		Rated	kW	0.027	0.034	
	Operating Current (max)		A	0.3	0.3	0.4	
	Dimensions		H x W x D	mm	307 - 890 - 233	307 - 890 - 233	307 - 890 - 233
	Weight		kg	15.5	15.5	15.5	
	Air Volume (SLo-Lo-Mid-Hi-SHi)*3 (Dry/Wet)	Cooling	m³/min	4.3 - 5.8 - 7.1 - 8.8 - 11.9	4.3 - 5.8 - 7.1 - 8.8 - 12.8	5.7 - 7.6 - 8.9 - 10.6 - 13.9	
		Heating	m³/min	4.0 - 5.7 - 7.1 - 8.5 - 14.4	4.3 - 5.7 - 7.1 - 8.5 - 13.7	5.4 - 6.4 - 8.5 - 10.7 - 15.7	
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SHi)*3	Cooling	dB(A)	19 - 23 - 29 - 36 - 42	19 - 24 - 29 - 36 - 43	27 - 31 - 35 - 39 - 46	
		Heating	dB(A)	19 - 24 - 29 - 36 - 45	19 - 24 - 29 - 36 - 45	25 - 29 - 34 - 39 - 47	
	Sound Level (PWL)		dB(A)	58	58	60	
	Outdoor Unit	Dimensions		H x W x D	mm	550 - 800 - 285	550 - 800 - 285
Weight		kg	35	36	55		
Air Volume		Cooling	m³/min	31.4	33.8	48.8	
		Heating	m³/min	27.4	27.4	51.3	
Sound Level (SPL)		Cooling	dB(A)	46	49	51	
		Heating	dB(A)	49	50	54	
Sound Level (PWL)		Cooling	dB(A)	60	61	64	
		Heating	dB(A)	61	61	64	
Operating Current (max)		A	9.6	10.2	14.8		
Breaker Size		A	10	12	16		
Ext. Piping	Diameter	Liquid / Gas	mm	6.35/9.52	6.35/9.52	6.35/9.52	
	Max. Length	Out-In	m	20	20	30	
	Max. Height	Out-In	m	12	12	15	
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	
		Heating	°C	-25 ~ +24	-25 ~ +24	-25 ~ +24	

(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP if leaked to the atmosphere.

This appliance contains a refrigerant fluid with a GWP equal to 560. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 560 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R32 is 675 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHi: Super High


(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(*5) Please see page 51-52 for heating (warmer season/colder season) specifications.

MSZ-FT V GK SERIES



Indoor Unit

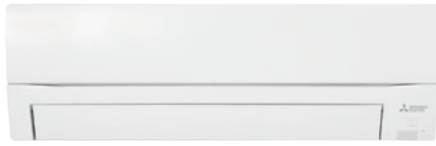

FT25/35/50VGK



Outdoor Unit



MUZ-FT25VGK



MUZ-FT35/50VGK

Remote Controller



back light



Type				Inverter Heat Pump						
Indoor Unit			MSZ-FT25VGK		MSZ-FT35VGK		MSZ-FT50VGK			
Outdoor Unit			MUZ-FT25VGHZ		MUZ-FT35VGHZ		MUZ-FT50VGHZ			
Refrigerant				R32 ^(※1)						
Power Supply	Source			Outdoor power supply						
	Outdoor (V/Phase/Hz)			230 / Single / 50						
Cooling	Design Load		kW	2.5		3.5		5.0		
	Annual Electricity Consumption ^(※2)		kWh/a	101		142		243		
	SEER ^(※4)			8.6		8.6		7.2		
	Energy Efficiency Class			A+++		A+++		A++		
	Capacity	Rated	kW	2.5		3.5		5.0		
		Min - Max	kW	0.8 - 3.5		0.8 - 4.0		0.8 - 5.2		
	Total Input		Rated	kW	0.580		0.910		1.630	
	EER			4.31		3.85		3.07		
	EEL Rank			A		A		B		
Heating (Average Season)	Design Load		kW	3.2(-10°C)		4.0(-10°C)		5.0(-10°C)		
	Declared Capacity	at reference design temperature	kW	3.2(-10°C)		4.0(-10°C)		5.0(-10°C)		
		at bivalent temperature	kW	3.2(-10°C)		4.0(-10°C)		5.0(-10°C)		
		at operation limit temperature	kW	3.0(-25°C)		3.4(-25°C)		3.6(-25°C)		
		Back Up Heating Capacity	kW	0.0(-10°C)		0.0(-10°C)		0.0(-10°C)		
	Annual Electricity Consumption ^(※2)		kWh/a	973		1216		1625		
	SCOP			4.6		4.6		4.63		
	Energy Efficiency Class			A++		A++		A+		
	Capacity	Rated	kW	3.2		4.0		5.0		
		Min	kW	0.9		0.9		0.9		
		Max at 7°C	kW	6.2		6.6		7.8		
		Max at -15°C	kW	3.6		4.4		5.0		
		Max at -15°C	kW	3.0		3.4		3.6		
		Total Input	Rated	kW	0.760		1.020		1.300	
	COP			4.21		3.92		3.85		
	EEL Rank			A		A		A		
Heating (Warmer Season)	Design Load		kW	1.8(2°C)		2.2(2°C)		2.7(2°C)		
	Declared Capacity	at reference design temperature	kW	1.8(2°C)		2.2(2°C)		2.7(2°C)		
		at bivalent temperature	kW	1.8(2°C)		2.2(2°C)		2.7(2°C)		
		at operation limit temperature	kW	3.0(-25°C)		3.4(-25°C)		3.6(-25°C)		
		Back Up Heating Capacity	kW	0.0(2°C)		0.0(2°C)		0.0(2°C)		
	Annual Electricity Consumption ^(※2)		kWh/a	432		527		684		
	SCOP			5.8		5.8		5.5		
	Energy Efficiency Class			A+++		A+++		A+++		
	Operating Current (max)			A	10.0		13.9		13.9	
Indoor Unit	Input		Rated	kW	0.039		0.04		0.047	
	Operating Current (max)		A	0.4		0.4		0.4		
	Dimensions		H × W × D	mm	280 838 229		280 838 229		280 838 229	
	Weight		kg	10		10		10		
	Air Volume (SLo-Lo-Mid-Hi-SHi (Dry/Wet))	Cooling	m³/min	3.9 - 5.9 - 8.2 - 10.4 - 12.3		3.9 - 6.1 - 8.3 - 10.7 - 13.1		5.5 - 7.6 - 9.8 - 12.0 - 13.1		
		Heating	m³/min	3.9 - 6.3 - 9.0 - 12.0 - 13.2		3.9 - 6.9 - 10.2 - 13.5 - 14.7		5.5 - 8.4 - 11.4 - 14.4 - 15.5		
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SHi)	Cooling	dB(A)	19 - 27 - 36 - 41 - 46		19 - 27 - 36 - 42 - 47		28 - 34 - 40 - 45 - 48		
		Heating	dB(A)	19 - 31 - 39 - 46 - 49		19 - 33 - 42 - 49 - 52		28 - 36 - 45 - 51 - 54		
	Sound Level (PWL)		dB(A)	60		60		60		
Outdoor Unit	Dimensions		H × W × D	mm	550 800 285		714 800 285		714 800 285	
	Weight		kg	34		40		40		
	Air Volume	Cooling	m³/min	30.4		40.2		40.2		
		Heating	m³/min	30.4		40.2		40.2		
	Sound Level (SPL)	Cooling	dB(A)	46		49		51		
		Heating	dB(A)	49		52		54		
	Sound Level (PWL)		dB(A)	60		61		64		
	Operating Current (max)		A	9.6		13.5		13.5		
	Breaker Size		A	12		16		16		
Ext. Piping	Diameter		Liquid / Gas	mm	6.35 / 9.52		6.35 / 9.52		6.35 / 9.52	
	Chargeless piping length		Out-In	m	75		75		75	
	Max. Length		Out-In	m	20		30		30	
	Max. Height		Out-In	m	12		15		15	
Guaranteed Operating Range (Outdoor)			Cooling	°C	-10 ~ +46		-10 ~ +46		-10 ~ +46	
			Heating	°C	-25 ~ +24		-25 ~ +24		-25 ~ +24	

(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

MFZ-KJ SERIES



Indoor Unit

R410A
Single / Multi



MFZ-KJ25/35/50VE2



Outdoor Unit



MUZF-KJ25/35VEHZ



MUZF-KJ50VEHZ

Remote Controller



Type			Inverter Heat Pump			
Indoor Unit			MFZ-KJ25VE2	MFZ-KJ35VE2	MFZ-KJ50VE2	
Outdoor Unit			MUFZ-KJ25VEHZ	MUFZ-KJ35VEHZ	MUFZ-KJ50VEHZ	
Refrigerant			R410A (*1)			
Power Supply	Source		Outdoor power supply			
	Outdoor (V/Phase/Hz)		230 / Single / 50			
Cooling	Design Load		kW	2.5	3.5	5.0
	Annual Electricity Consumption (*2)		kWh/a	102	150	266
	SEER (*4)			8.5	8.1	6.5
		Energy Efficiency Class		A+++	A++	A++
	Capacity	Rated	kW	2.5	3.5	5.0
		Min - Max	kW	0.5 - 3.4	0.5 - 3.7	1.6 - 5.7
	Total Input	Rated	kW	0.540	0.940	1.410
Heating (Average Season)	Design Load		kW	3.5	3.6	4.5
	Declared Capacity	at reference design temperature	kW	3.5	3.6	4.5
		at bivalent temperature	kW	3.5	3.6	4.5
		at operation limit temperature	kW	1.6	2.3	3.3
	Back Up Heating Capacity		kW	0.0	0.0	0.0
	Annual Electricity Consumption (*2)		kWh/a	1104	1158	1467
	SCOP (*4)			4.4	4.3	4.2
		Energy Efficiency Class		A+	A+	A+
	Capacity	Rated	kW	3.4	4.3	6.0
		Min - Max	kW	1.2 - 5.1	1.2 - 5.8	2.2 - 8.4
	Total Input	Rated	kW	0.770	1.100	1.610
	Operating Current (max)			A	4.42	3.91
Indoor Unit	Input		Rated	kW	0.016	0.038
	Operating Current (max)		A	0.17	0.17	0.34
	Dimensions		H x W x D	mm	600 - 750 - 215	
	Weight		kg	15	15	15
	Air Volume (SLo-Lo-Mid-Hi-SHi (*2) (Dry/Wet))	Cooling	m³/min	3.9 - 4.9 - 5.9 - 7.1 - 8.2	3.9 - 4.9 - 5.9 - 7.1 - 8.2	5.6 - 6.7 - 8.0 - 9.3 - 10.6
		Heating	m³/min	3.9 - 5.1 - 6.2 - 7.7 - 9.7	3.9 - 5.1 - 6.2 - 7.7 - 9.7	6.0 - 7.4 - 9.4 - 11.6 - 14.0
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SHi (*2))	Cooling	dB(A)	20 - 25 - 30 - 35 - 39	20 - 25 - 30 - 35 - 39	27 - 31 - 35 - 39 - 44
		Heating	dB(A)	19 - 25 - 30 - 35 - 41	19 - 25 - 30 - 35 - 41	29 - 35 - 40 - 45 - 50
	Sound Level (PWL)		dB(A)	49	50	56
	Outdoor Unit	Dimensions		H x W x D	mm	550 - 800 - 285
Weight		kg	37	37	55	
Air Volume		Cooling	m³/min	31.3	31.3	45.8
		Heating	m³/min	33.6	33.6	45.8
Sound Level (SPL)		Cooling	dB(A)	46	47	49
		Heating	dB(A)	51	51	51
Sound Level (PWL)		Cooling	dB(A)	59	60	63
		Operating Current (max)		A	9.2	10
Breaker Size		A	10	12	16	
Ext. Piping		Diameter		Liquid / Gas	mm	6.35 / 9.52
	Max. Length		Out-In	m	20	30
	Max. Height		Out-In	m	12	15
Guaranteed Operating Range [Outdoor]			Cooling	°C	-10 ~ +46	-10 ~ +46
			Heating	°C	-25 ~ +24	-25 ~ +24

(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(*3) SHi: Super High

(*4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

ZUBADAN[®] SERIES


The ZUBADAN Series incorporates an original Flash Injection technology that improves the already high heating capacity of the system. This new member of the series line-up ensures comfortable heat pump-driven heating performance in cold regions.



* Units in photo are Japanese models.
European model specifications are different.

Improved Heating Performance

Mitsubishi Electric's unique "Flash Injection" circuit achieves remarkably high heating performance. This technology has resulted in an excellent heating capacity rating in outdoor temperatures as low as -15°C , and the guaranteed heating operation range of the heating mode has been extended to -25°C . Accordingly, the heat-pump units of the ZUBADAN Series are perfect for warming homes in the coldest of regions.

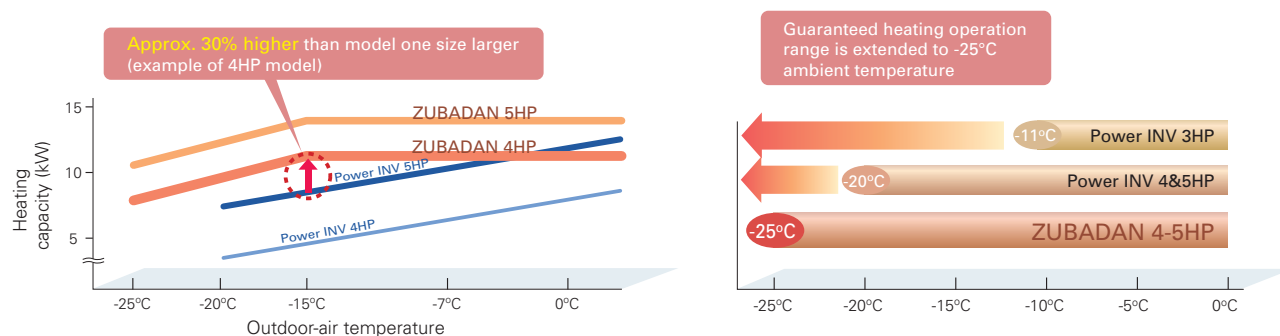


Enhanced Comfort


The Flash Injection circuit improves start-up and recover from the defrosting operation. A newly introduced defrost operation control also improves defrost frequency. These features enable the temperature to reach the set temperature more quickly, and contribute to maintaining it at the desired setting.

Quick Start-up

■ Operation at $+2^{\circ}\text{C}$ outdoor temperature

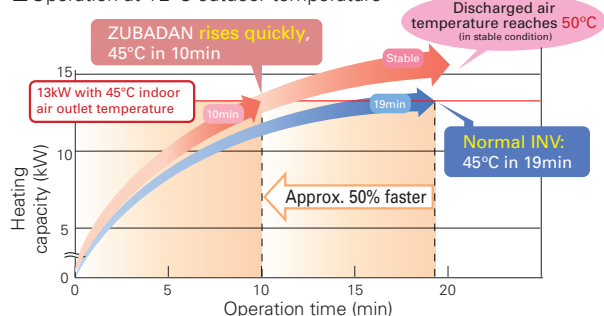


■ Operation at -20°C outdoor temperature

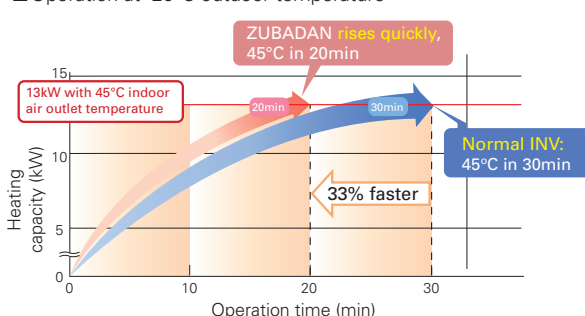


ZUBADAN Defrost Control and Faster Recovery from Defrost Operation

Field Test Results: Office building in Asahikawa, Hokkaido, Japan

■ Operation data for 25 Jan. 2005

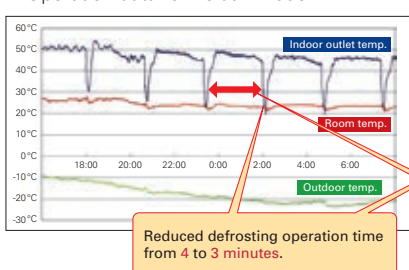

■ Operation data for 2 Dec. 2004

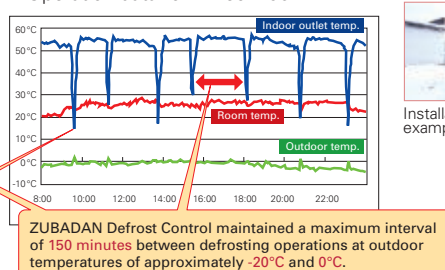


Installation example



ErP Lot 10 Compliant with High Energy-efficiency Achieving SEER/SCOP Rank A and A+





Powerful heating yet annually high energy efficiency in both cooling and heating, achieving rank A and A+.

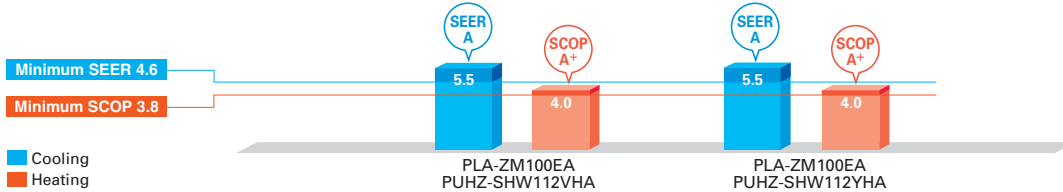

Mitsubishi Electric's Flash Injection Technology The Key to High Heating Performance at Low Outdoor Temperatures

Flash Injection Circuit


ZUBADAN

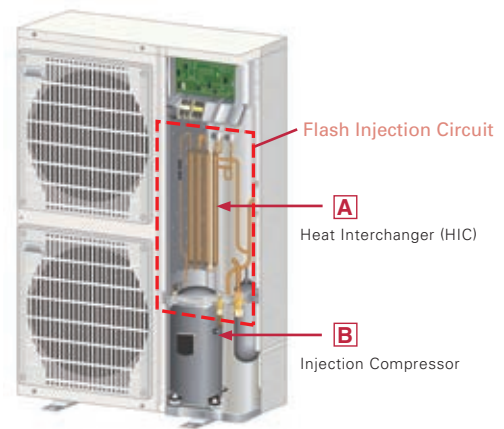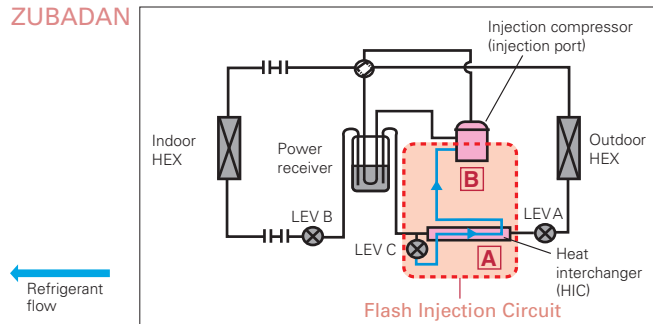

The ZUBADAN Series is equipped with Mitsubishi Electric's original Flash Injection Circuit, which is comprised of a bypass circuit and heat interchanger (HIC). The HIC transforms rerouted liquid refrigerant into a gas-liquid state to lower compression load. This process ensures excellent heating performance even when the outdoor temperature drops very low.


In traditional units, when the outdoor temperature is low, the volume of refrigerant circulating in the compressor decreases due to the drop in refrigerant pressure and the protection from overheating caused by high compression, thereby reducing heating capacity. The Flash Injection Circuit injects refrigerant to maintain the refrigerant circulation volume and compressor operation load, thereby maintaining heating capacity.

Mollier Chart Image Representing Flash Injection Circuit Operation

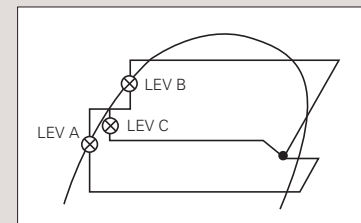


A Heat Interchanger (HIC)

HIC cross-sectional view

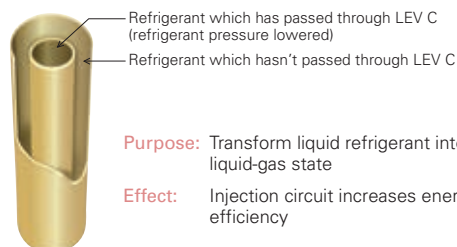

The compressor is subjected to a heavy load when compressing liquid refrigerant, and the result is lower operation efficiency. The addition of HIC supports refrigerant heat exchange at two different pressure levels. The heat-exchange process transforms the injected liquid refrigerant into a gas liquid state, thereby decreasing the load on the compressor during the compression process.

B Injection Compressor

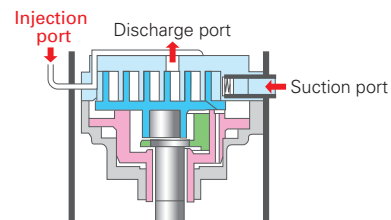

Purpose: To increase the volume of refrigerant being circulated

Effect: Improves heating capacity at low outdoor temperatures, and enables higher indoor-air outlet temperature adjustment and higher defrost operation speed

Refrigerant passes from the HIC into the compressor through the injection port. Having two refrigerant inlets makes it possible to raise the volume of refrigerant being circulated when the outdoor temperature is low and at the start of heating operation.

PLZ-SHW SERIES



Indoor Unit



PLA-ZM100/125EA

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EAL	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

Outdoor Unit



PUHZ-SHW112VHA(-BS)
PUHZ-SHW112/140YHA(-BS)

Remote Controller



Enclosed in
PLP-6EALM/PLP-6EALME



*optional



*optional



*optional



Type				Inverter Heat Pump		
Indoor Unit				PLA-ZM100EA		PLA-ZM125EA
Outdoor Unit				PUHZ-SHW112VHA	PUHZ-SHW112YHA	PUHZ-SHW140YHA
Refrigerant				R410A*1		
Power Supply	Source			Outdoor power supply		
	Outdoor (V/Phase/Hz)			230 / 1 / 50	400 / 3 / 50	400 / 3 / 50
Cooling	Capacity	Rated	kW	10.0	10.0	12.5
		Min - Max	kW	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0
	Total Input	Rated	kW	2.857	2.857	5.000
	EER			—	—	2.50
		EEL Rank		—	—	—
	Design Load		kW	10.0	10.0	—
	Annual Electricity Consumption *2		kWh/a	633	633	—
	SEER			5.5	5.5	—
	Energy Efficiency Class			A	A	—
Heating (Average Season)	Capacity	Rated	kW	11.2	11.2	14.0
		Min - Max	kW	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0
	Total Input	Rated	kW	2.667	2.667	4.000
	COP			—	—	3.50
		EEL Rank		—	—	—
	Design Load		kW	12.7	12.7	—
	Declared Capacity	at reference design temperature	kW	11.2 (-10°C)	11.2 (-10°C)	—
		at bivalent temperature	kW	11.2 (-7°C)	11.2 (-7°C)	—
		at operation limit temperature	kW	9.3 (-25°C)	9.3 (-25°C)	—
	Back Up Heating Capacity		kW	1.5	1.5	—
	Annual Electricity Consumption *2		kWh/a	4420	4420	—
SCOP			4.0	4.0	—	
	Energy Efficiency Class			A+	A+	—
Operating Current (max)			A	35.5	13.5	13.5
Indoor Unit	Input	Rated	kW	0.07	0.07	0.08
	Operating Current (max)		A	0.47	0.47	0.52
	Dimensions <Panel>	H × W × D	mm	298-840-840 <40-950-950>		
	Weight <Panel>		kg	26 <5>	26 <5>	26 <5>
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	19 - 22 - 25 - 28	19 - 22 - 25 - 28	21 - 24 - 26 - 29
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	31 - 34 - 37 - 40	31 - 34 - 37 - 40	33 - 36 - 39 - 41
	Sound Level (PWL)		dB(A)	61	61	62
Outdoor Unit	Dimensions	H × W × D	mm	1350 - 950 - 330 (+30)		
	Weight		kg	120	134	134
	Air Volume	Cooling	m³/min	100	100	100
		Heating	m³/min	100	100	100
	Sound Level (SPL)	Cooling	dB(A)	51	51	51
		Heating	dB(A)	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	69	69	69
	Operating Current (max)		A	35	13	13
	Breaker Size		A	40	16	16
Ext. Piping	Diameter	Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	75	75	75
	Max. Height	Out-In	m	30	30	30
Guaranteed Operating Range [Outdoor]		Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-25 ~ +21	-25 ~ +21	-25 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PLZ-SHW SERIES



Indoor Unit

R410A



PLA-M100/125EA

Panel

Panel	With Signal Receiver	With 3D i-see Sensor	With Wireless Remote Controller	With Auto Elevation
PLP-6EA				
PLP-6EAL	✓			
PLP-6EAE		✓		
PLP-6EALAE	✓	✓		
PLP-6EAJ	✓			✓
PLP-6EAJE	✓	✓		✓
PLP-6EALM	✓		✓	
PLP-6EALME	✓	✓	✓	

Outdoor Unit

R410A



PUHZ-SHW112VHA (-BS)
PUHZ-SHW112/140YHA (-BS)

Remote Controller



Enclosed in
PLP-6EALM/PLP-6EALME



*optional



*optional



*optional



Type			Inverter Heat Pump			
Indoor Unit			PLA-M100EA		PLA-M125EA	
Outdoor Unit			PUHZ-SHW112VHA	PUHZ-SHW112YHA	PUHZ-SHW140YHA	
Refrigerant			R410A*1			
Power Supply	Source		Outdoor power supply			
	Outdoor (V/Phase/Hz)		230 / 1 / 50	400 / 3 / 50	400 / 3 / 50	
Cooling	Capacity	Rated	kW	10.0	12.5	
		Min - Max	kW	4.9 - 11.4	5.5 - 14.0	
	Total Input	Rated	kW	2.940	5.000	
	EER			—	2.50	
		EEL Rank		—	—	
	Design Load	kW	10.0	10.0	—	
	Annual Electricity Consumption*2	kWh/a	661	661	—	
	SEER		5.3	5.3	—	
	Energy Efficiency Class	A	A	—		
Heating (Average Season)	Capacity	Rated	kW	11.2	14.0	
		Min - Max	kW	4.5 - 14.0	5.0 - 16.0	
	Total Input	Rated	kW	2.793	4.000	
	COP			—	3.50	
		EEL Rank		—	—	
	Design Load	kW	12.7	12.7	—	
	Declared Capacity	at reference design temperature	kW	11.2 (-10°C)	—	
		at bivalent temperature	kW	11.2 (-7°C)	—	
		at operation limit temperature	kW	9.3 (-25°C)	—	
	Back Up Heating Capacity	kW	1.5	1.5	—	
	Annual Electricity Consumption*2	kWh/a	4445	4445	—	
	SCOP		4.0	4.0	—	
	Energy Efficiency Class	A+	A+	—		
Operating Current (max)		A	35.5	13.5	13.7	
Indoor Unit	Input	Rated	kW	0.07	0.08	
	Operating Current (max)		A	0.46	0.66	
	Dimensions <Panel>	H × W × D	mm	298-840-840 <40-950-950>		
	Weight <Panel>		kg	24 <5>	26 <5>	
	Air Volume [Lo-Mi2-Mi1-Hi]		m³/min	19 - 23 - 26 - 29	21 - 25 - 28 - 31	
	Sound Level (SPL) [Lo-Mi2-Mi1-Hi]		dB(A)	31 - 34 - 37 - 40	33 - 37 - 41 - 44	
	Sound Level (PWL)		dB(A)	61	65	
Outdoor Unit	Dimensions	H × W × D	mm	1350 - 950 - 330 (+30)		
	Weight		kg	120	134	
	Air Volume	Cooling	m³/min	100	100	100
		Heating	m³/min	100	100	100
	Sound Level (SPL)	Cooling	dB(A)	51	51	51
		Heating	dB(A)	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	69	69	69
	Operating Current (max)		A	35	13	13
	Breaker Size		A	40	16	16
	Ext. Piping	Diameter	Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88
Max. Length		Out-In	m	75	75	
Max. Height		Out-In	m	30	30	
Guaranteed Operating Range [Outdoor]	Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C	-25 ~ +21	-25 ~ +21	-25 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

PEDZ-SHW JA SERIES



Indoor Unit


R32
R410A



PEAD-M100/125JA(L)

Outdoor Unit

R410A



PUAH-SHW112VHA(-BS)
PUAH-SHW112/140YHA(-BS)

Remote Controller



*optional



*optional



*optional



*optional



Type				Inverter Heat Pump		
Indoor Unit				PEAD-M100JA(L)		PEAD-M125JA(L)
Outdoor Unit				PUHZ-SHW112VHA(-BS)		PUHZ-SHW112YHA(-BS)
Refrigerant				R410A*1		
Power Supply	Source			Outdoor power supply		
	Outdoor (V/Phase/Hz)			VHA:230 / Single / 50, YHA:400 / Three / 50		
Cooling	Capacity	Rated	kW	10.0	10.0	12.5
		Min - Max	kW	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0
	Total Input	Rated	kW	2.924 (2.904)	2.924 (2.904)	3.895 (3.875)
	EER			—	—	3.21 (3.22)
		EEL Rank		—	—	—
	Design Load		kW	10.0	10.0	—
	Annual Electricity Consumption*2		kWh/a	729 (714)	729 (714)	—
	SEER			4.8 (4.9)	4.8 (4.9)	—
Energy Efficiency Class			B	B	—	
Heating (Average Season)	Capacity	Rated	kW	11.2	11.2	14.0
		Min - Max	kW	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0
	Total Input	Rated	kW	3.103	3.103	3.879
	COP			—	—	3.61
		EEL Rank		—	—	—
	Design Load		kW	12.7	12.7	—
	Declared Capacity	at reference design temperature	kW	11.2	11.2	—
		at bivalent temperature	kW	11.2	11.2	—
		at operation limit temperature	kW	9.4	9.4	—
	Back Up Heating Capacity		kW	1.5	1.5	—
Annual Electricity Consumption*2		kWh/a	4664	4664	—	
SCOP			3.8	3.8	—	
Energy Efficiency Class			A	A	—	
Operating Current (max)			A	37.7	15.7	15.8
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.25 (0.23) / 0.23	0.25 (0.23) / 0.23	0.36 (0.34) / 0.34
	Operating Current (max)		A	2.65	2.65	2.76
	Dimensions	H x W x D	mm	250 - 1400 - 732		
	Weight		kg	41 (40)	41 (40)	43 (42)
	Air Volume [Lo-Mid-Hi]		m³/min	24.0 - 29.0 - 34.0	24.0 - 29.0 - 34.0	29.5 - 35.5 - 42.0
	External Static Pressure		Pa	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150	35 / 50 / 70 / 100 / 150
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40
	Sound Level (PWL)		dB(A)	61	61	65
Outdoor Unit	Dimensions	H x W x D	mm	1350 - 950 - 330 (+30)		
	Weight		kg	120	134	134
	Air Volume	Cooling	m³/min	100.0	100.0	100.0
		Heating	m³/min	100.0	100.0	100.0
	Sound Level (SPL)	Cooling	dB(A)	51	51	51
		Heating	dB(A)	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	69	69	69
	Operating Current (max)		A	35.0	13.0	13.0
Breaker Size			A	40	16	
Ext. Piping	Diameter	Liquid / Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	75	75	75
	Max. Height	Out-In	m	30	30	30
Guaranteed Operating Range [Outdoor]		Cooling*3	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-25 ~ +21	-25 ~ +21	-25 ~ +21

^{*1} Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

^{*2} Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

^{*3} Optional air protection guide is required where ambient temperature is lower than -5°C.

PKZ-SHW SERIES



Indoor Unit

R32
R410A



PKA-M100KA(L)

Outdoor Unit

R410A



PUIHZ-SHW112VHA(-BS)
PUIHZ-SHW112/140YHA(-BS)

Remote Controller



*optional



*optional



*optional



Type				Inverter Heat Pump			
Indoor Unit				PKA-M100KA(L)			
Outdoor Unit				PUHZ-SHW112VHA(-BS)		PUHZ-SHW112YHA(-BS)	
Refrigerant				R410A* ¹			
Power Supply	Source			Outdoor power supply			
	Outdoor (V/Phase/Hz)			VHA:230 / Single / 50, YHA:400 / Three / 50			
Cooling	Capacity	Rated	kW	10.0		10.0	
		Min - Max	kW	4.9 - 11.4		4.9 - 11.4	
	Total Input	Rated	kW	2.924		2.924	
	Design Load		kW	10.0		10.0	
	Annual Electricity Consumption* ²		kWh/a	673		673	
	SEER			5.2		5.2	
			Energy Efficiency Class		A		A
Heating (Average Season)	Capacity	Rated	kW	11.2		11.2	
		Min - Max	kW	4.5 - 14.0		4.5 - 14.0	
	Total Input	Rated	kW	3.103		3.103	
	Design Load		kW	12.7		12.7	
	Declared Capacity	at reference design temperature	kW	11.2		11.2	
		at bivalent temperature	kW	11.2		11.2	
		at operation limit temperature	kW	9.4		9.4	
	Back Up Heating Capacity		kW	1.5		1.5	
	Annual Electricity Consumption* ²		kWh/a	4664		4664	
	SCOP			3.8		3.8	
		Energy Efficiency Class		A		A	
Operating Current (max)			A	35.6		13.6	
Indoor Unit	Input	Rated	kW	0.08		0.08	
	Operating Current (max)		A	0.57		0.57	
	Dimensions <Panel>	H × W × D	mm	365 - 1170 - 295			
	Weight <Panel>		kg	21		21	
	Air Volume [Lo-Mid-Hi]		m ³ /min	20 - 23 - 26		20 - 23 - 26	
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	41 - 45 - 49		41 - 45 - 49	
	Sound Level (PWL)		dB(A)	65		65	
Outdoor Unit	Dimensions	H × W × D	mm	1350 - 950 - 330 (+30)			
	Weight		kg	120		134	
	Air Volume	Cooling	m ³ /min	100.0		100.0	
		Heating	m ³ /min	100.0		100.0	
	Sound Level (SPL)	Cooling	dB(A)	51		51	
		Heating	dB(A)	52		52	
	Sound Level (PWL)	Cooling	dB(A)	69		69	
	Operating Current (max)		A	35.0		13.0	
	Breaker Size		A	40		16	
	Ext. Piping	Diameter	Liquid / Gas	mm	9.52 / 15.88		
Max. Length		Out-In	m	75			75
Max. Height		Out-In	m	30			30
Guaranteed Operating Range (Outdoor)		Cooling* ³	°C	-15 ~ +46		-15 ~ +46	
		Heating	°C	-25 ~ +21		-25 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP; if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.


MXZ-VFHZ MXZ-VAHZ SERIES



New hyper-heating MXZ allows you to create an oasis of comfort throughout your home and office in the rooms you use most, any time of the year.

Standard rated heating capacity is maintained even when the outside-air temperature drops to -15°C .

Maintains high capacity output even when outside-air temperature is low.

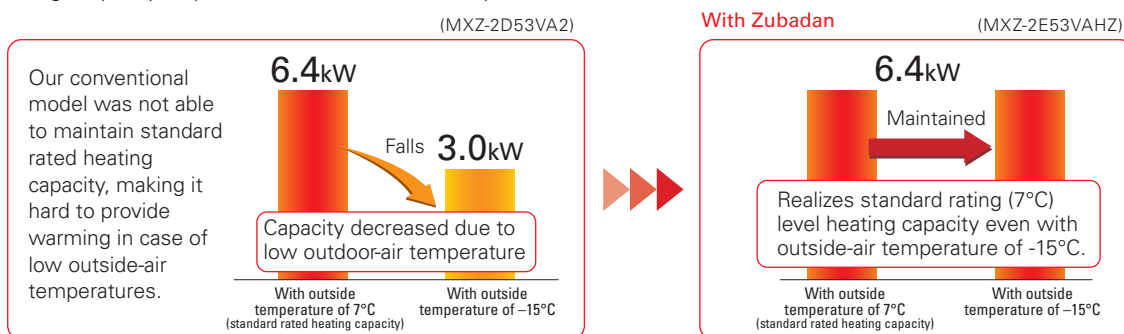

Can operate at outside-air temperature of -25°C

1. Incorporated key parts resistant to cold of up to -25°C after rigorous selection.
2. Printed circuit board-core of the air conditioner—is coated on both sides to protect it in harsh environments.

Freeze-prevention heater standard equipment


Prevents capacity loss and operation from stopping due to drain water freezing.

Drain water **freezes** after operation in the harsh cold



Without Freeze-prevention heater

With Hyper heating Does not freeze!




With Freeze-prevention heater

Continuous heating for long periods

Wasteful defrosting operation suppressed to enable more comfortable long-term continuous heating.

Extremely cold outside

With Hyper heating


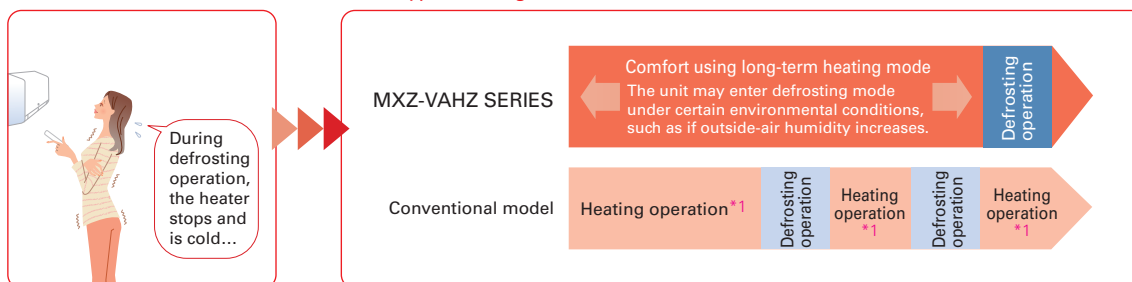


*1: Conventional model performs continuous heating approximately 30min up to a maximum of 90min.

One outdoor unit supports multiple indoor units.


With MXZ-VAHZ, one outdoor unit can cool and heat up to six rooms. They can be installed neatly in sites with limited space such as condominium balconies.

*Please note that cooling and heating modes cannot be run simultaneously in different rooms.

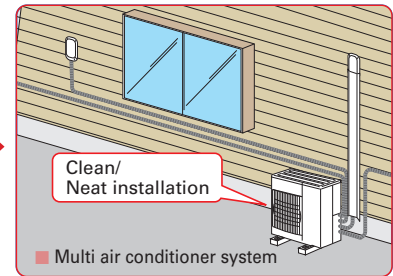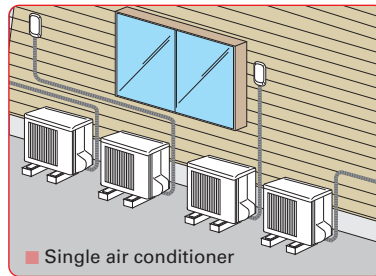

EXAMPLE SYSTEM

MXZ-4E83VAHZ system

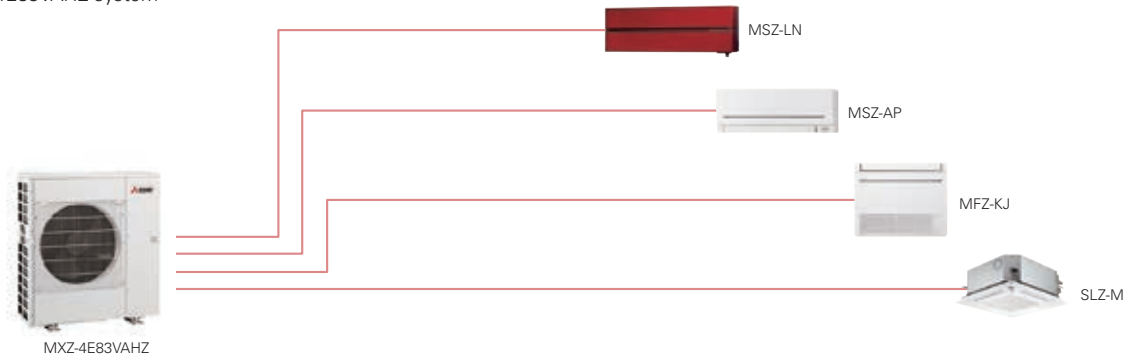

Freedom of combinations in cold region greatly enhanced

The variety of indoor unit connection options in cold regions, restricted until now, has been greatly increased. Increased design freedom.

OUTDOOR UNITS

2-room use



4-room use



INDOOR UNITS

Wall-mounted



Floor-standing



Cassette



Ceiling-suspended



Ceiling-concealed



*1: P series cannot connect with MXZ-4E83VAHZ when ampere limit adjustment function is operated.

MXZ-VFHZ SERIES



Outdoor Unit

R32



MXZ-2F53VFHZ

R32



MXZ-4F83VFHZ

Type				Inverter Heat Pump	
Indoor Unit				Please refer to *4 *5	
Outdoor Unit				MXZ-2F53VFHZ	MXZ-4F83VFHZ
Refrigerant				R32**1	
Power Supply	Source			Outdoor power supply	
	Outdoor (V/Phase/Hz)			220 - 230 - 240V / Single / 50	
Cooling	Capacity	Rated	kW	5.3	8.3
		Min - Max	kW	1.1 - 6.0	3.5 - 9.2
	Total Input	Rated	kW	1.29	1.90
	Design Load		kW	5.3	8.3
	Annual Electricity Consumption*2		kWh/a	274	398
	SEER*4			6.8	7.3
		Energy Efficiency Class*4		A++	A++
Heating (Average Season)	Capacity	Rated (7°C)	kW	6.4	9.0
		Rated (-7°C)	kW	6.4	9.0
		Rated (-15°C)	kW	6.4	9.0
		Min - Max	kW	1.0 - 7.0	3.5 - 11.6
	Total Input	Rated	kW	1.36	1.70
	Design Load		kW	6.4	8.3
	Declared Capacity	at reference design temperature	kW	6.9	10.6
		at bivalent temperature	kW	7.4	11.5
		at operation limit temperature	kW	4.1	5.7
	Back Up Heating Capacity		kW	0.0	1.1
	Annual Electricity Consumption*2		kWh/a	2172	3286
	SCOP			4.1	4.3
		Energy Efficiency Class*4		A+	A+
Max. Operating Current (Indoor+Outdoor)			A	15.6	28.0
Outdoor Unit	Dimensions	H x W x D	mm	796 x 950 x 330	1048 x 950 x 330
	Weight		kg	61	86
	Air Volume	Cooling	m³/min	63.0	63.0
		Heating	m³/min	47.0	77.0
	Sound Level (SPL)	Cooling	dB(A)	45	55
		Heating	dB(A)	47	57
	Sound Level (PWL)	Cooling	dB(A)	55	66
	Breaker Size		A	16	30
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2	6.35x 4 / 12.7 x 1+9.52x 3
	Total Piping Length (max)		m	30	70
	Each Indoor Unit Piping Length (max)		m	20	25
	Max. Height		m	15 (10) *3	15 (10) *3
	Chargeless Length		m	30	70
Guaranteed Operating Range [Outdoor]		Cooling	°C	-10 ~ +46	-10 ~ +46
		Heating	°C	-25 ~ +24	-25 ~ +24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 2088. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 2088 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results.

Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2E53VAHZ MSZ-EF18VE + MSZ-EF35VE

MXZ-4E83VAHZ MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF25VE

*5 Indoor unit compatibility table is shown on page 114.

MXZ-VAHZ SERIES



Outdoor Unit

R410A



MXZ-2E53VAHZ

R410A



MXZ-4E83VAHZ

Type				Inverter Heat Pump	
Indoor Unit				Please refer to *4 *5	
Outdoor Unit				MXZ-2E53VAHZ	MXZ-4E83VAHZ
Refrigerant				R410A*1	
Power Supply	Source			Outdoor power supply	
	Outdoor (V/Phase/Hz)			220 - 230 - 240V / Single / 50	
Cooling	Capacity	Rated	kW	5.3	8.3
		Min - Max	kW	1.1 - 6.0	3.5 - 9.2
	Total Input	Rated	kW	1.29	2.25
	Design Load		kW	5.3	8.3
	Annual Electricity Consumption*2		kWh/a	282	447
	SEER*4			6.5	6.5
		Energy Efficiency Class*4		A++	A++
Heating (Average Season)	Capacity	Rated (7°C)	kW	6.4	9.0
		Rated (−7°C)	kW	6.4	9.0
		Rated (−15°C)	kW	6.4	9.0
		Min - Max	kW	1.0 - 7.0	3.5 - 11.6
		Total Input	Rated	kW	1.36
	Design Load		kW	6.4	10.1
	Declared Capacity	at reference design temperature	kW	6.4	9.0
		at bivalent temperature	kW	6.4	9.0
		at operation limit temperature	kW	2.4	2.5
	Back Up Heating Capacity		kW	0.0	1.1
	Annual Electricity Consumption*2		kWh/a	2165	3446
	SCOP			4.1	4.1
		Energy Efficiency Class*4		A+	A+
	Max. Operating Current (Indoor+Outdoor)			A	15.6
Outdoor Unit	Dimensions	H x W x D	mm	796 x 950 x 330	1048 x 950 x 330
	Weight		kg	61	87
	Air Volume	Cooling	m ³ /min	470	63.0
		Heating	m ³ /min	470	77.0
	Sound Level (SPL)	Cooling	dB(A)	45	53
		Heating	dB(A)	47	57
	Sound Level (PWL)	Cooling	dB(A)	55	66
	Breaker Size		A	16	30
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 x 2 / 9.52 x 2	6.35x 4 / 12.7 x 1+9.52x 3
	Total Piping Length (max)		m	30	70
	Each Indoor Unit Piping Length (max)		m	20	25
	Max. Height		m	15 (10) *3	15 (10) *3
	Chargeless Length		m	20	25
Guaranteed Operating Range [Outdoor]		Cooling	°C	−10 ~ +46	−10 ~ +46
		Heating	°C	−25 ~ +24	−25 ~ +24

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 2088. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 2088 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.

*2 Energy consumption based on standard test results.

Actual energy consumption will depend on how the appliance is used and where it is located.

*3 If the outdoor unit is installed higher than the indoor unit, max. height is reduced to 10m.

*4 EER/COP, EEL rank, SEER/SCOP values and energy efficiency class are measured when connected to the indoor units listed below.

MXZ-2E53VAHZ MSZ-EF18VE + MSZ-EF35VE

MXZ-4E83VAHZ MSZ-EF18VE + MSZ-EF18VE + MSZ-EF22VE + MSZ-EF25VE

*5 Indoor unit compatibility table is shown on page 114.

To ensure full capacity in cold and snowy regions...

3 Important Points to Remember When Installing the Outdoor Unit



* RAC/PAC (inc. Air to Water) /MXZ


Wind and snow can significantly reduce capacity.

Be sure to check the information below and install the outdoor unit correctly.

1 Installation Location

Be aware of the prevailing wind direction in winter and install the outdoor unit where it is as sheltered as possible.




Units are easily affected by wind and unit may not be able to run at full capacity

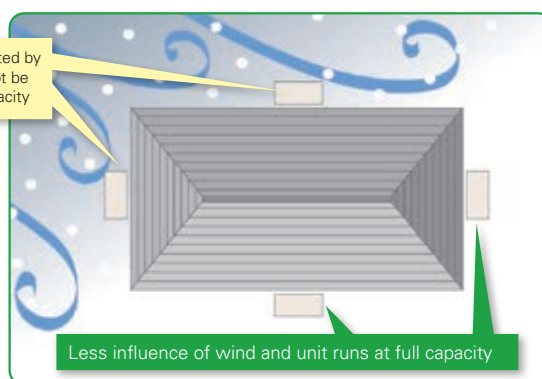

2 Measures for Drainage of Water



Case 1: Unit is installed close to passage (walkway)

Do not install the unit close to passage as drainage water from the unit may freeze and cause a slipping hazard.

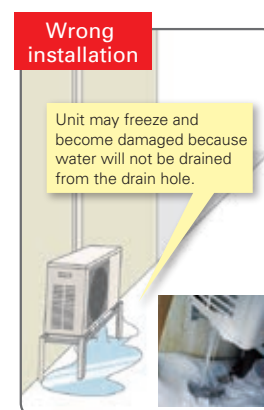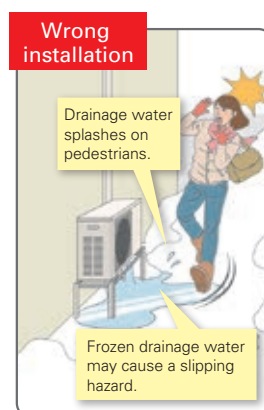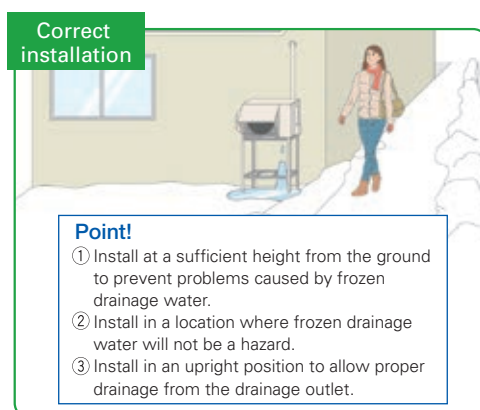

Case 2: Multiple units are installed

Do not install units on top of one another as it may cause frozen drainage water on the bottom unit.

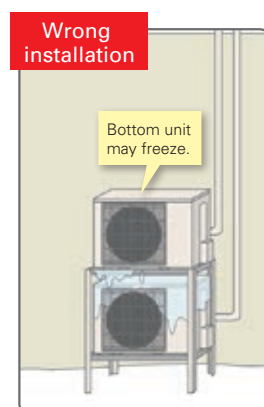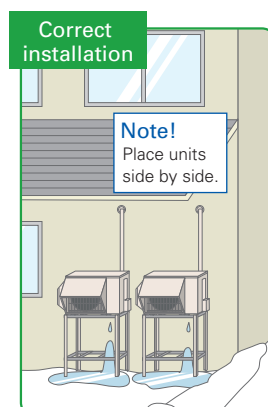

3


Measures for Snow

Unit is installed on the ground

To avoid the adverse effects of snow and frozen drainage water, install the unit on a stand to ensure a sufficient height from the ground.

[RAC / PAC / MXZ]


Correct installation




Point!

- ① Install at a position/height to prevent the unit being buried in snow *1 and the adverse effects of frozen drainage water. *2
 - ② Install so as to avoid the effects of snow or snowdrift.
 - ③ Install so as to avoid the damage from falling snow or icicles.
- *1 Install at a height above the highest snowfall depth.
*2 Even for correct installations, dripping drainage water may form an icicle which needs to be cleared away regularly to prevent a blocked drainage outlet.

Wrong installation

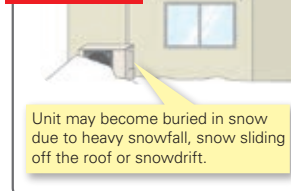


Wrong installation

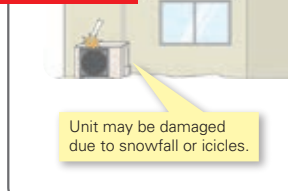

Use a stand to add sufficient height to protect the unit heat exchanger from snow and prevent icicles forming during defrost operation.


Correct installation

Minimum height (h) should be higher than the highest snowfall depth (h0) **+20cm**



Wrong installation


Unit may become covered in snow if the stand height is insufficient.



Install snow protection hood as necessary

[RAC / PAC / MXZ]

Correct installation




Point!

Install the snow protection hood or other cover in snowy regions.

Necessity of accessories (drain socket & centralised drain pan, stand, snow protection hood, base heater)

	Snowy region	Cold region	Remarks
	Countermeasures for snow	Countermeasures for freezing	
Drain socket, Centralised drain pan	Not used	Not used	Prevents freezing
Stand	Needed	Needed	[RAC / PAC / MXZ] 1. Install so as to prevent the unit being buried in snow (at a height greater than the highest snowfall depth). Be sure that the stand does not obstruct drainage. 2. Install so as to prevent damage to the unit due to frozen drainage water (icicles).
Snow protection hood	Needed *When the installation position is subject to snowfall.	—	1. Prevents heat exchanger from being covered in snow. 2. Prevents snow accumulating inside the air duct.
Base heater	—	Needed	[RAC / PAC / MXZ] Outdoor units equipped with a heater for cold regions are those with an "H" in the model name. For the cold-climate zone, use of a unit with a heater is strongly recommended. Even for the moderate-climate zone use of a unit with a heater is recommended for regions subject to high humidity in winter.



CAUTION

About disposal of drainage water

When the unit is installed in cold or snowy regions :

Drainage water may freeze in the drain socket/hose and prevent the fan from rotating.



Do not attach a drain socket packaged as an accessory to the unit.

* In the case that fitting a drain socket is absolutely necessary, steps must be taken so that the drainage water does not freeze.
For more information, please consult Mitsubishi Electric or one of its dealers/resellers.

Arrangement for snow protection hood

[RAC / PAC / MXZ]

Separately sold parts are available for some models.

Please consult Mitsubishi Electric or one of its dealers/resellers at the time of purchase for details.

AIR TO WATER



SELECTION Choose the series that best matches the building layout.

Excellent ecodan's heating performance, even at low outdoor temperature!










R32

INDOOR UNIT

Hydro box, cylinder unit



OUTDOOR UNIT

Packaged type	Small capacity (Under 5kW)*	Medium capacity (6.0kW–11.2kW)*
	 PUZ-WM50	 PUZ-WM60/85/112
Split type	Small capacity (Under 5kW)*	Medium capacity (6.0kW–14kW)*
		 PUD-SHWM60/80/100/120/140
		 PUD-SWM60/80/100/120
Eco Inverter	 SUZ-SWM40/60	 SUZ-SWM80

*Rated capacity is at conditions A2W35. (according to EN14511)

R410A

INDOOR UNIT







Hydro box, cylinder unit



OUTDOOR UNIT

Split type	Medium capacity (7.5kW–14kW)*	Large capacity (≥16kW)*
	 PUHZ-SHW80/112	 PUHZ-SHW140
		 PUHZ-SHW230
	 PUHZ-SW75/100	 PUHZ-SW120
		 PUHZ-SW160/200

*Rated capacity is at conditions A2W35. (according to EN14511)

Other ATW-related system	Mr.SLIM+	PUMY + ecodan	ecodan geodan
			
	 PUHZ-FRP71	 PUMY-P112/125/140	 EHGT17D-YM9ED

New Eco-design Directive

What is the ErP Directive?


The Eco-design Directive for Energy-related Products (ErP Directive) established a framework to set mandatory standards for ErPs sold in the European Union (EU). The ErP Directive introduces new energy efficiency ratings across various product categories. It affects how products such as computers, vacuum cleaners, boilers and even windows are classified in terms of environmental performance. Labelling regulations that apply to our ATW heat pumps came into effect from September 26, 2015, and then revised from September 26, 2019.

New energy label and measurements

Under directive 2009/125/EC, ATW heat pumps of up to 70kW are required to show their heating efficiency on the energy label. The purpose of the energy label is to inform customers about the energy efficiency of a heating unit. The efficiency for space heating is ranked from A+++ to D (from September 2019). In the case of domestic hot water, it is from A+ to F (from September 2019).

Product label

This label is for individual heating units, such as an ecodan heat pump. Typically, the space heater label is used for ecodan systems with a hydro box, and the combination heater label is used for ecodan systems with a cylinder unit.

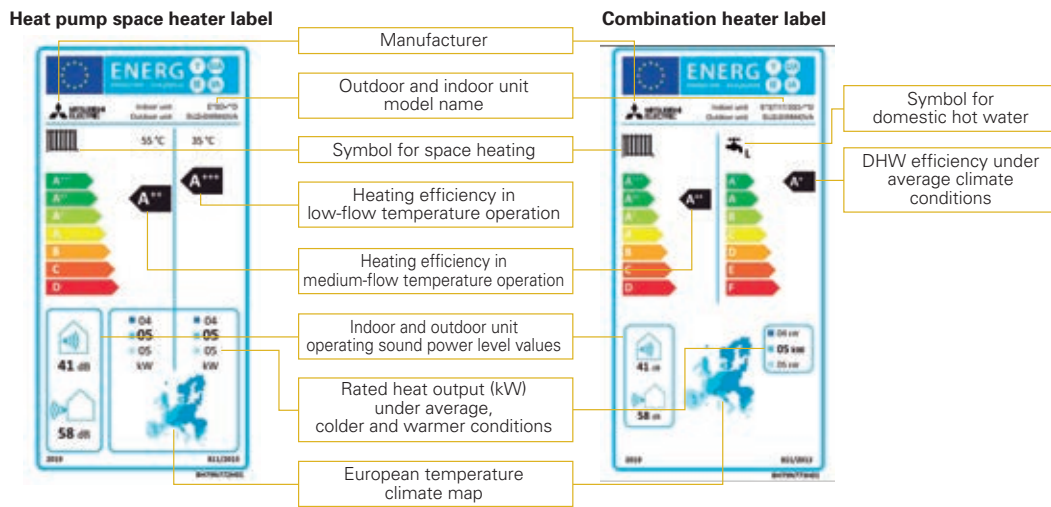

These labels are delivered with all ecodan outdoor units.


What is the package label?

A heating system can use several energy-related products, such as a controller or solar thermal system. Therefore, a label showing the efficiency of the total heating system is required. The category range is defined from A+++ to G. Creating the package label is the responsibility of the installers and distributors. A useful tool on the Mitsubishi Electric website is available to easily create the labels for ecodan products and controllers.

<http://erp.mitsubishielectric.eu/erp/options>

Package label

This label is for heating systems that use several energy-related products, such as a controller or a solar thermal system.

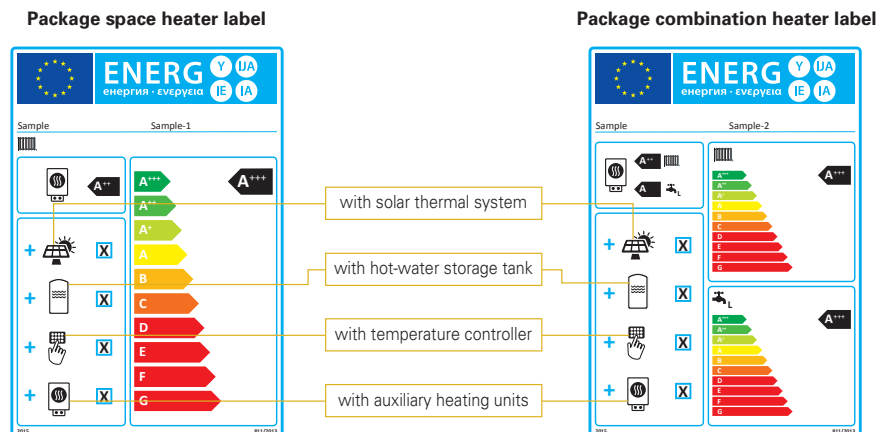

Customised package labels including ecodan heat pumps and the FTC6 controller can be created on the Mitsubishi Electric website.

New R32 Eco Inverter Line-up


Energy Efficient and Environmentally Friendly Heating

- Wide variety of product line with R32 refrigerant
- More energy efficient than conventional eco inverter models




High Performance

All models have achieved the "RANK A+++" for SCOP at low temperature.

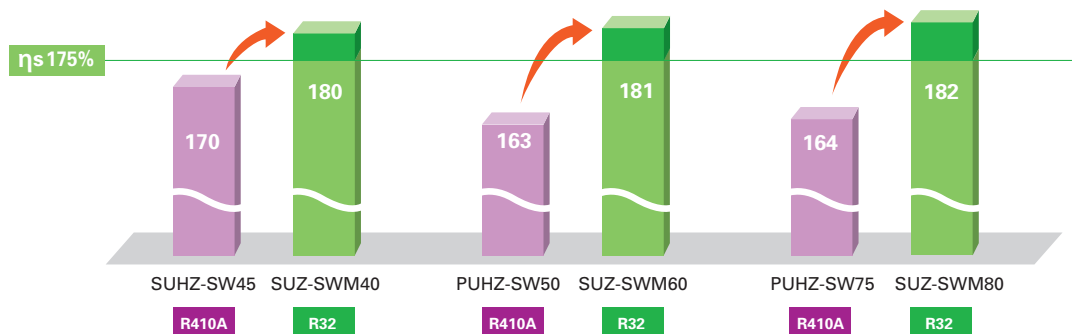

Low Noise


Compared with conventional outdoor unit, New R32 eco inverter achieved lower noise level, assuring the flexibility of installation in dense residential areas.

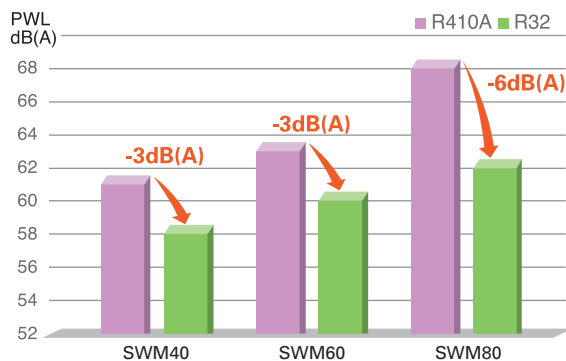

* Compared SUZ-SWM40/60/80VA with SUHZ-SW45VA/PUHZ-SW50VKA/PUHZ-SW75VHA
* Rated condition (According to EN12102)


60°C Flow Temperature

Along with its increased lower operating range the New R32 range is capable of delivering a higher flow rate of 60°C, 5°C higher than the conventional model.

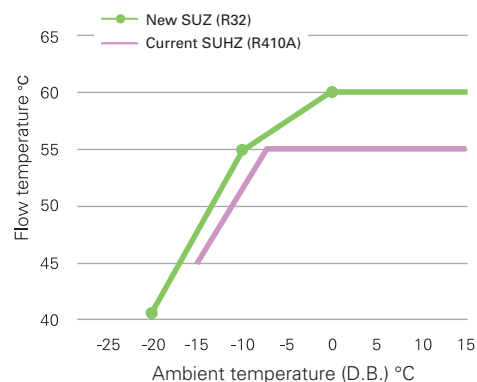


Guaranteed Operating Range Expansion

Guaranteed heating operating range is extended to -20°C.

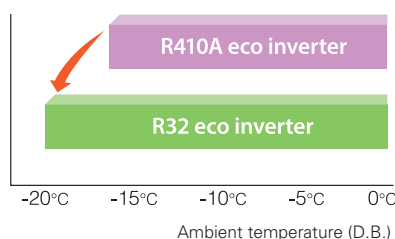

Reducing Refrigerant Amount

<R410A vs 32> CO₂ equivalent emission

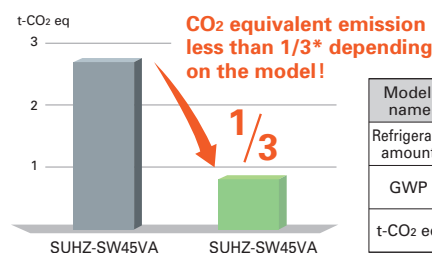

*Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088 (R410A) and 675 (R32).

Dedicated Heat Pump for Residence




reddot award 2018
winner

Stylish and Compact

The Stylish Design and Compact Size Harmonises Residential Application

- Simple and elegant design by rounding left and right corners of the unit.
- Concealing the fan by matching the panel and the grille in dark colour.
- Unified shape and safety by setting the fan whole backwards and matching the grille on the same level of the front panel.
- Wider lineup with environmental-friendly R32 refrigerant.

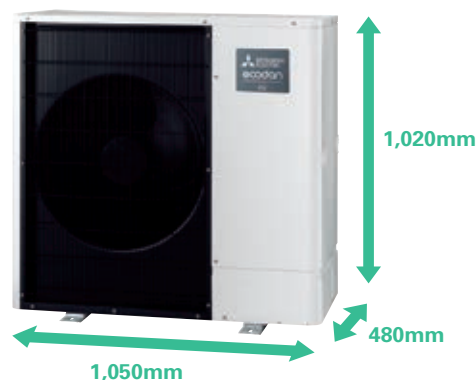


High Performance

New Compressor




- Compact
 - High performance
 - Flash injection*
- *ZUBADAN (SHWM) only

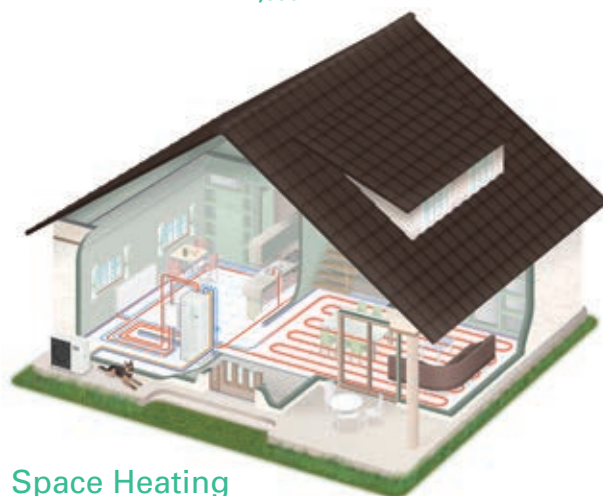

ErP Lot 1 Compliant with Highest Seasonal Space Heating Energy Efficiency Class A+++


All models have achieved the "RANK A+++" for SCOP at low temperature.

Heating

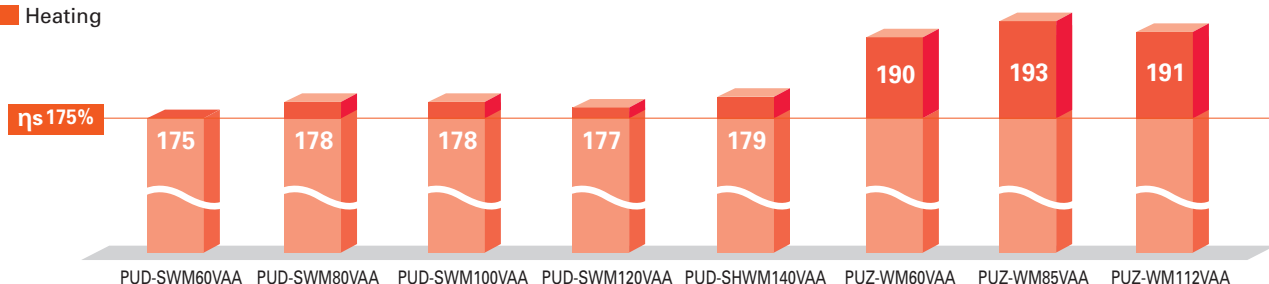


60°C Flow Temperature at Low Ambient Temperature

60°C max flow temperature can be maintained up to Ambient -7°C.
(For PUD-S(H)WM models)

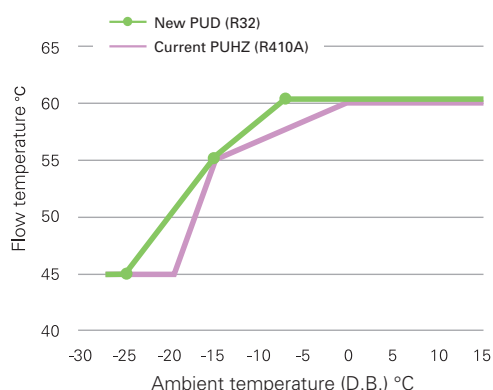

Reducing Refrigerant Amount

<R410A vs 32> CO₂ equivalent emission

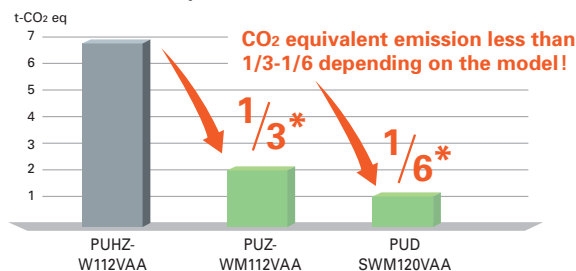

Model name	PUHZ-W112VAA	PUZ-WM112VAA	PUD-SWM120VAA
Refrigerant amount	3.3kg	3.0kg	1.6kg
GWP	2088 (R410A)	675 (R32)	675 (R32)
t-CO ₂ eq	6.890	2.025	1.080


*Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088(R410A) and 675 (R32).

Compact with Silence

Noise Reduction-10dB(A)

Mitsubishi Electric heat pumps are designed to give you highly efficient and eco-friendly heating with 10dB(A) less in PWL. Compared with conventional models.


* Rated condition (According to EN12102)

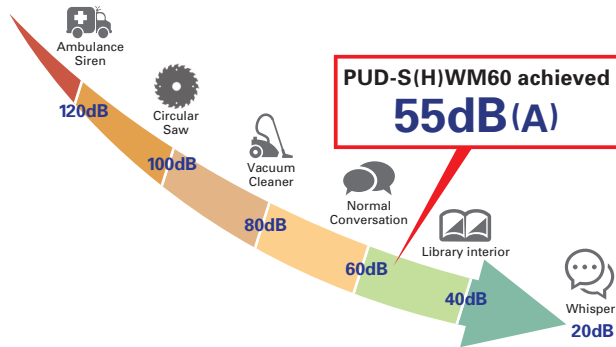

Blowing Air

To Reduce Fan Noise

- Optimising fan position
- Optimising bell mouth shape
- Bigger fan diameter

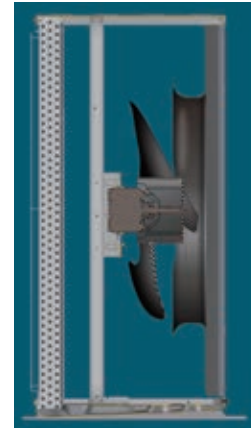

Enclosing Noise

Shutting Out Noise from Compressor


- The structure of double enclosing

Primary: enclosing a compressor (the structure is patented.)
Secondary: enclosing machine room.



Avoiding Vibration and Resonance


- Dedicated soft rubber mount for the compressor to avoid vibration.
- Optimising piping structure to avoid vibration and resonance.

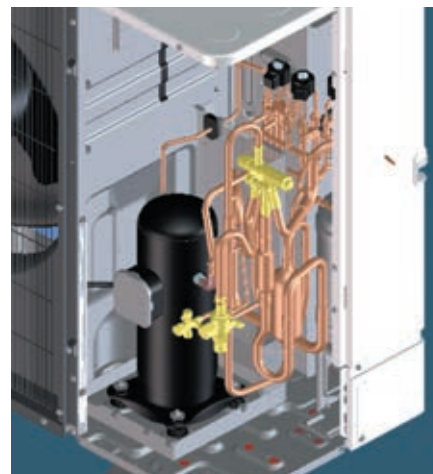

New Control for Eco-friendly Heating

Defrost Improvement


Conventional models often switch to defrost operation even when there is not much frost on outdoor units. By detecting frost more precisely, it is possible to prevent frequent on/off for defrosting and to give you more comfort.

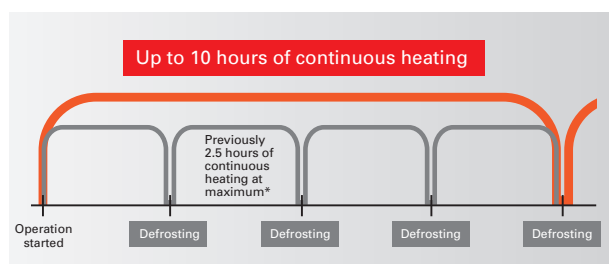

* Comparison between prior PUHZ-SHW-AA model and new PUD-S(H)WM-AA model.
Maximum number of operational hours at our Company's laboratory (external temperature -15°C).
Hours of continuous operation may differ depending on external temperature conditions.

New Compressor Frequency Control



By reducing frequency changes (from 17 to 4 times per hour), hunting is prevented. Reducing fluctuation improves efficiency and prolongs compressor life.

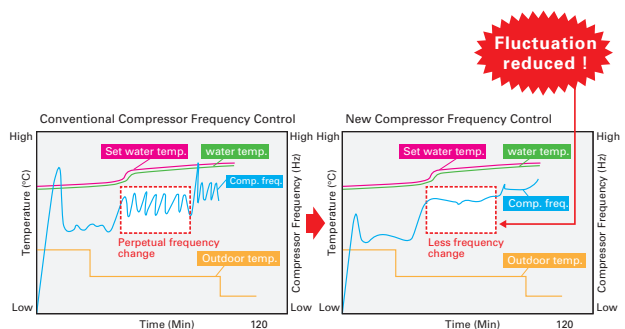

New D generation Indoor Unit

New All-in-one Compact Indoor Unit

- All-in-one: Key functional components are incorporated
- Compact cylinder unit: 1,400~2,050mm in height
- Compact hydro box: Only 530×360mm footprint
- Easy installation: Factory fitted pressure relief valve
- Easy service: Relevant parts are located at the front of the unit for easy maintenance
- Easy transport: Handles attached on front and back (cylinder unit)

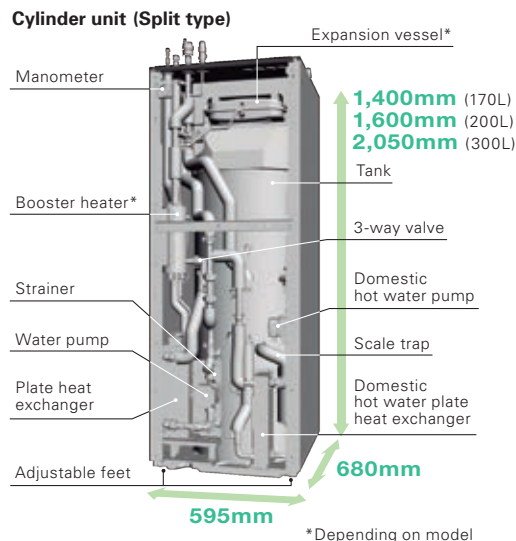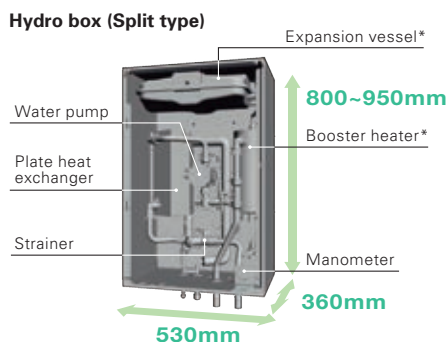

New Line-up

ecodan's line-up has many types of indoor units to satisfy diverse customers' needs, requests and local regulations. It includes various capacity units, with/without booster heater, with/without an expansion vessel, etc. In addition, a reversible hydro box and a reversible cylinder unit are available.

Hydro box



Cylinder unit



Available options

- Packaged or Split type
- With/without booster heater
- With/without expansion vessel
- Cylinder unit has an integrated 170L/200L/300L stainless steel tank
- Hydro box is control ready for domestic hot water with a stand-alone tank (locally supplied)

New Reversible Models

(for heating/cooling)

Perfect Comfort in Winter and Summer Time, Thanks to Our Reversible Models.

Reversible models are now available for both hydro box and cylinder units (Both for split type and cylinder unit for packaged type). The new reversible cylinder is now able to produce cold water for cooling use and can alternatively produce domestic hot water in summer time.

Reversible hydro box




Reversible cylinder unit



Easy Installation and Low Maintenance

Simple Piping Arrangement

All water piping is aligned at the rear side of the unit for easy connection and neat finish.




Built-in Drain Pan for Reversible Cylinder Models

Reversible models now include a built-in space saving drain pan and the drain socket is positioned at the back of the unit. With use of the adjuster bolt, the outlet height can be higher than 50mm, allowing 5m drainage.



Hydro Box Piping Arrangement Improvement

Through structural innovation related to the space around the pipes, the area where the spanner can be moved has been increased, thus improving pipe work and enabling it to be completed smoothly.

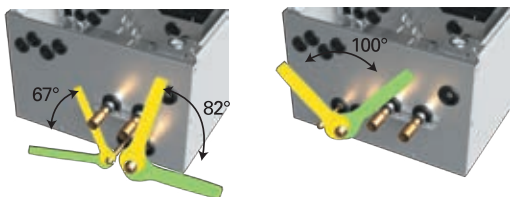

Minimum Additional Water Required

In average/warmer conditions, minimum additional water is required for outdoor unit. If there is enough water amount inside water pipe, radiator, or underfloor heating no buffer tank is required.

*Refer to the indoor unit installation manual for specific outdoor unit models.


Easy Adjustment

Adjust bolt capable of 50mm expansion for easy installation on uneven surfaces.



Initial Setting Wizard

In addition to language, date and time, you can set up hot water and heating/cooling operation, pump speed, flow rate range initial setting much simpler than previous models.

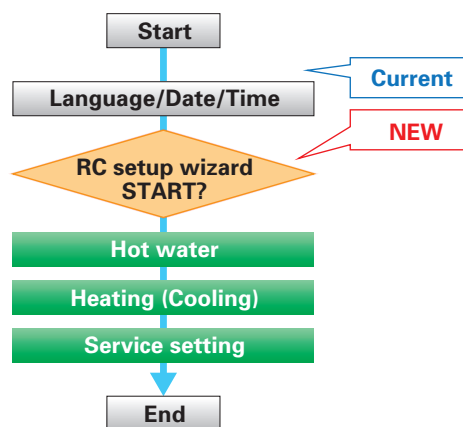

Operation Data Monitoring

Time, operation mode, flow/return/tank temperature, can be displayed on main remote controller.

Sample display of monitoring setting

26 Feb 2019 10:00					
		THW1	THW2	THW5	Flow
10:00	☀	41°C	38°C	54°C	20L
9:55	☀	38°C	38°C	54°C	20L
9:50	☀	48°C	48°C	54°C	20L
9:45	☂	60°C	56°C	54°C	15L
9:40	☂	59°C	55°C	52°C	15L
i ◀ ▶					(1/5)

New 2 Zone Kit

• You can select from 3 types of pump operations, 1. Fixed speed mode, 2. Fixed pressure mode, 3. Energy saving mode, depending on your preference.



- All-in-one kit: Key functional components are incorporated in 2 zone kit.
- Easy installation: G1 screw type flex-piping to avoid brazing.
- Compact size: Just to fit on the top of cylinder unit, also wall mountable.

High Performance

Improved Efficiency

With additional thermistor (THW5A), η_{wh} [%] rating is improved by more than 40% compared to previous C generation 200L models allowing 170L and 200L to achieve A⁺, the highest possible domestic hot water efficiency rank.


Excellent DHW efficiency



	170L	200L	300L
	η_{wh} [%]	η_{wh} [%]	η_{wh} [%]
Conventional	—	96~104	—
New	120~148	135~159	118~128
Load Profile	L	L	XL
DHW Rank	A ⁺	A ⁺	A/A ⁺

Thermistor Position of Cylinder

The thermistor position is now selectable allowing the unit to accommodate for different water demands in order to maximise the efficiency of the unit for any size of household or application. Using two thermistors equipped with all sizes of tanks, you can now select the DHW recharge amount from two options (Standard/Large). It helps accommodate for different water demands in order to maximise the efficiency of the unit for any size of household or application. This mode can be selected from main remote controller.



Unique Technology of ecodan


Auto Adaptation

Maximise Energy Savings While Retaining Comfort at All Times

Regarding the relation of flow temperature and unit performance, a 1°C drop in the flow temperature improves the coefficient of performance (COP) of the ATW system by 2%. This means that energy savings are dramatically affected by controlling the flow temperature in the system.

In a conventional system controller, the flow temperature is determined based on the pre-set heat curve depending on the actual outdoor temperature. However, this requires a complicated setting to achieve the optimal heat curve.

■ Heat curve setting (Example)

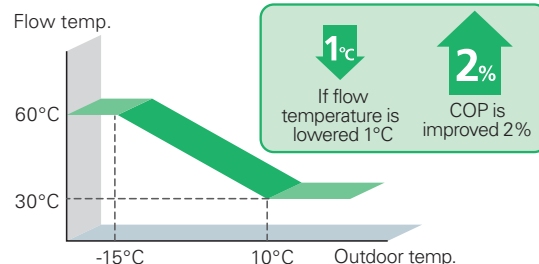

*SD logo is a trademark of SD-3C, LLC


Auto Adaptation Improvement

Mitsubishi Electric's Auto Adaptation Function Automatically Tracks Changes in the Actual Room Temperature and Outdoor Temperature and Adjusts the Flow Temperatures Accordingly.

Aiming to realise further comfort and energy savings, Mitsubishi Electric has already introduced a revolutionary new controller. Auto Adaptation function measures the room temperature and outdoor temperature, and then calculates the required heating capacity for the room. Simply stated, the flow temperature is automatically controlled according to the required heating capacity, while optimal room temperature is maintained at all times, ensuring the appropriate heating capacity and preventing energy from being wasted.

Furthermore, by estimating future changes in room temperature, the system works to prevent unnecessary increases and decreases in the flow temperature. Accordingly, Auto Adaptation maximises both comfort and energy savings without the need for complicated settings.

For Mitsubishi Electric ecodan, by introducing improved control logic, we achieved faster heating and more energy saving.

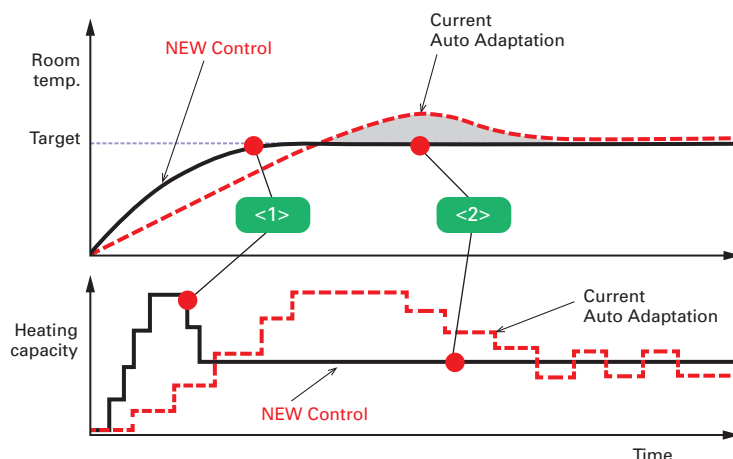


<1> Fast heating with improved accuracy in learning building heat load

<2> Energy saving by avoiding over heating and capacity fluctuation with better control response, i.e. control interval and resolution

Smart Grid Ready Function

In recent years renewable energy generation has become popular. However, this rapid growing causes the problem of supply and demand gap of electricity. The aim of “SG Ready” is to make the electricity demand response more flexible by creating a uniform interface for the smart grid integration of heat pumps. Air-to-Water units need to be able to change the operation pattern when the signal is received from the Smart Grid Controller.

New ecodan Cylinder, Hydro box and FTC have been modified to communicate with Smart Grid Controller. The communication protocol is based on “SG Ready” label regulation. (Version 1.1; gültig ab 01.01.2013)

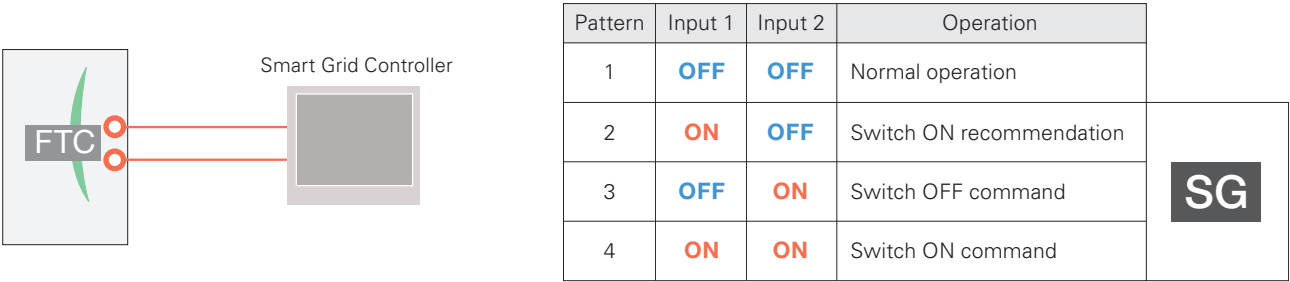

Pattern 1: Normal operation

When there is no signal from the Smart Grid Controller, DHW and Heating operate according to user settings.

Pattern 2: Switch ON recommendation

When set to the “Switch ON” recommendation, the target temperature of DHW is increased a specified amount and the heating “Thermo ON” condition range is extended.

Pattern 3: Switch OFF command

When the “Switch OFF” command is received, both DHW and Heating are turned off.


Pattern 4: Switch ON command

When the “Switch ON” command is received, the target temperature of DHW is increased to the maximum target temperature and Heating continues.

Improved Smart Grid Ready

SG ready icon on main remote controller indicates that SG ready is active and its setting can be easily operated with main remote controller. Improved SG ready function enables you to choose the target temperature in unit of 1°C. Also, when PV manager is interlocked with ecodan and ecodan receives its signal, heat is stored as much as possible while heat pump and/or electric heater running.

Heat storage in large buffer tank will be made available for zone2 as well when peak cut signal is on. As long as a mixing valve keeps its control, zone2 flow temperature is maintained.

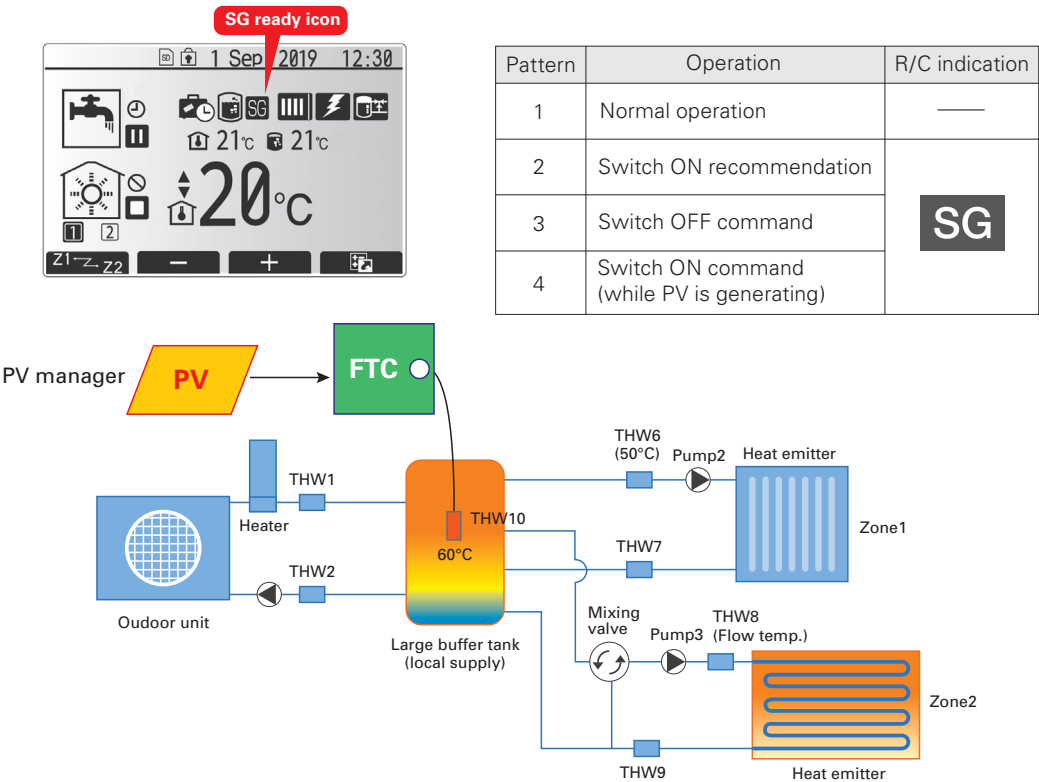



*SD logo is a trademark of SD-3C, LLC

Intelligent Hybrid Control (boiler interlock)

An Existing Boiler Can Be Used for Extra Heating Capacity in an Efficient Way


The flexibility of ecodan's intelligent control allows the system to be combined with the boiler currently in use. Additionally, this control can judge which heating source to use either ecodan or the existing boiler, based on various conditions*.

In the event of one heating unit not working due to some unforeseen problem, the other heating system can be used as a back-up, thereby preventing the heating system operation from stopping completely.

*Please see below "Heat source switchover".

Intelligent system combining a boiler with ecodan

■ Intelligent boiler interlock system

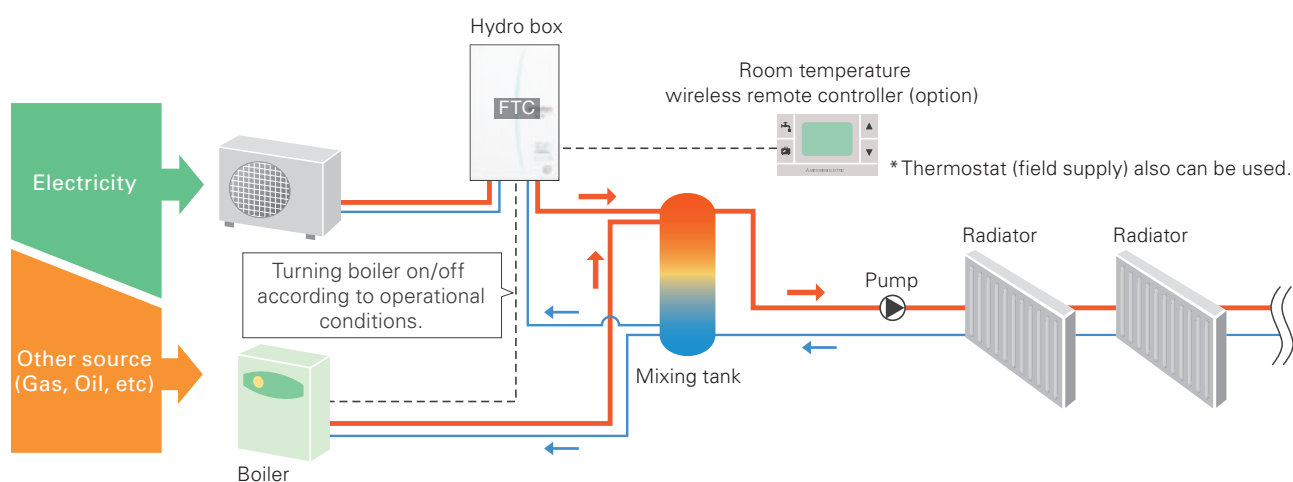

* Items such as a mixing tank, and pump are not included and need to be purchased locally.

Heat source switchover - Choose appropriate system based on needs

4 types of heat source switchover logic

- ① Switchover based on actual outdoor temperature
 - Heat source switchover occurs when the outdoor temperature drops below a pre-set temperature.
- ② Switchover based on running cost
 - Heat source switchover occurs by judging optimal operation based on running cost.
 - *Pre-registration of the energy price of electricity, and gas or oil per 1kWh is necessary.
- ③ Switchover based on CO₂ emission level
 - Heat source switchover occurs to minimise CO₂ emission.
 - *Pre-registration of CO₂ emission amount from electricity and gas or oil is necessary.
- ④ Switchover can also be activated via external input
 - For example, the peak cut signal from electric power company.



*SD logo is a trademark of SD-3C, LLC


2 Zone Control (for heating/cooling)

Improved Simultaneous Control of Two Different Zones

Using ecodan, it is possible to control two different flow temperatures, thereby managing two different heating load requirements. The system can adjust and maintain two flow temperatures when different temperatures are required for different rooms; for example, controlling a flow temperature of 40°C for the bedroom radiators and another flow temperature of 30°C for the living room floor heating.

Moreover, mixing valve control is advanced for improving zone 2 comfort by using heat storage in buffer tank. Also, new controller monitors the temperature inside buffer tank and prioritizes using the heat inside the tank to avoid frequent on/off operation when using 2 zone control.

■ Two temperature zones

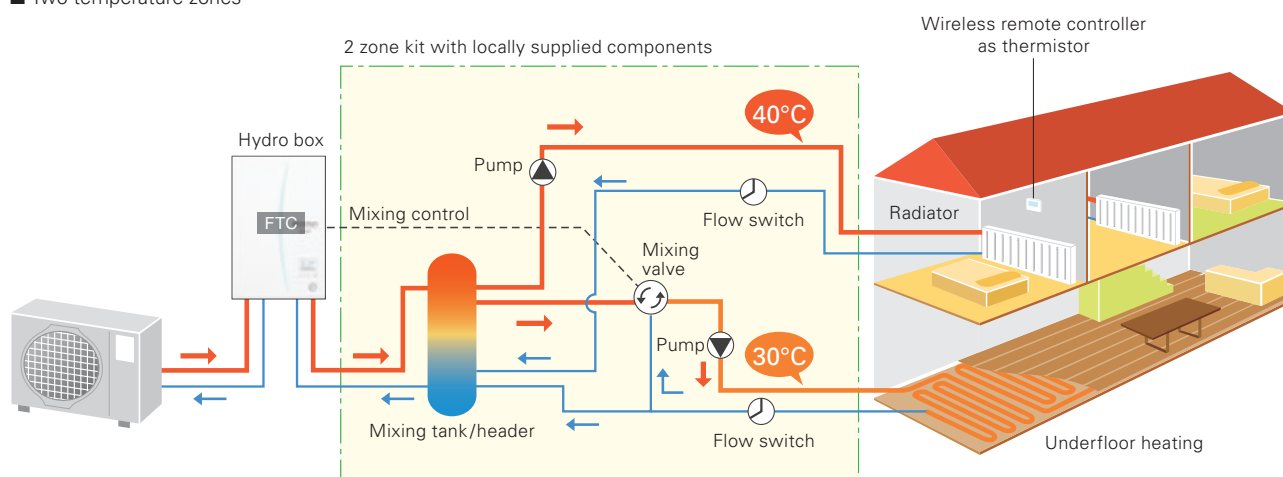

*Items such as a mixing tank, mixing valve flow switch and pumps are not included and need to be purchased locally.

Multiple Unit Control


Connect up to 6 Units – Automatic Control of Multiple Units for Bigger Capacity and Better Efficiency

A maximum of 6 units* can be configured according to the heating/cooling load of the building. The most efficient number of operating units is determined automatically based on heating/cooling load. This enables ecodan to provide optimal room temperature control, and thus superior comfort for room occupants. Also incorporated is a rotation function that enables each unit to run for an equal time period.

If one of the units malfunctions when using the Multiple Unit Control, another unit can be automatically operated for back-up, thereby preventing the system operation from stopping completely.

*Only same models (same capacity) can be used.

■ Multiple unit control

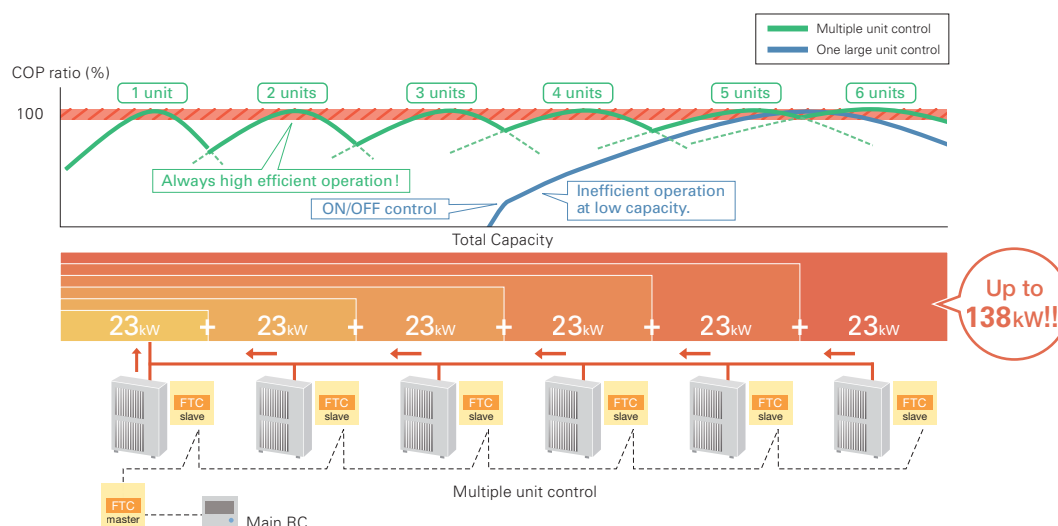

Remote Controllers


Smart User-friendly Controller with Stylish Design

Main remote controller

- Large screen and backlight for excellent visibility, even in dark environment
- Multi-language support (supports 15 languages)
- Can be removed from main unit and installed in a remote location (up to 500m)
- Quick reading of operation data (7.5 times faster than previous model)
- Wide range of convenient functions in response to user demand

Function settings

- Energy monitoring
- Two-zone control (cooling and heating)
- Two separate schedules
- Summer time setting
- Built-in room temperature sensors
- Hybrid control (boiler interlock)
- Floor drying mode
- Weekly timer
- Holiday mode
- Legionella prevention
- Error codes



Main controller



PAR-WR51R-E (Option)
Receiver



PAR-WT50R-E (Option)
Wireless remote controller

Wireless remote controller (optional)

- Built-in room temperature sensor; easy to place in the best position to detect room temperature
- Wiring work eliminated
- Simple design that is easy to operate
- Remote control from any room without needing to choose an installation location
- Backlight and big buttons that are easy to operate
- Domestic hot water boost and cancellation
- Simplified holiday mode



*SD logo is a trademark of SD-3C, LLC

Energy Monitoring

View Electricity Consumption and Heat Output on the Remote Controller

Every end user can now easily check the energy data of the ecodan heat pump.


Other features

- Daily, monthly and yearly data are stored and can be displayed using the main remote controller.
- External power meter and heat meter can be connected for accurate measurement.
- SD card is also available for storing data.


*Using pre-set values on the main remote controller, estimated energy consumption/output can be shown without external power and a heat meter.

Depending on operating condition and system configuration, there is some possibility to show different data from the reality.


*This function is available depending on the version of the outdoor unit model.



Heating capacity produced



Electric energy used




*SD logo is a trademark of SD-3C, LLC

Summer Time Setting

Easy Adjustment for Summer Time

Just switch the summer time mode 'on' using the main remote controller and the clock in the main remote controller is adjusted to summer time hours.

This function can release the end user from clock setting tasks.




Two Separate Schedules

Pre-setting Two Different Schedules for Winter and Summer Seasons

Two different schedule settings are available for use via the main remote controller.

These schedules can be pre-set and changed depending on the season. For example, from November to March, space heating and domestic hot water are used; however, during warm months such as from April to October, only domestic hot water is used.



<Example>

Schedule 1	Winter time
Space heating	daytime
Domestic hot water	early morning
Schedule 2	Summer time
Domestic hot water	any time


Easy Commissioning

Pump for Primary Water Circuit* Speed Setting Possible Using ecodan's Main Remote Controller

Even when the system is running, pump output can be set to one of five different settings using the main remote controller.

The person commissioning the system can adjust this speed much more easily.

*Speed setting of pump for domestic hot water is not available through the main remote controller when the system is running.




Flow sensor newly incorporated

The flow sensor is key for monitoring energy output and can also be used to detect flow error as well.

– Flow rate can be checked on the main remote controller.

– Flow rate can also be shown as graphs using the SD card tool.



Run indoor unit* without outdoor unit

During installation or situations such as an outdoor unit malfunction, the indoor unit can be operated using a heater.

While using this mode, flow and tank temperature are selectable.

Fixing and maintenance of the outdoor unit can be done without stopping heating and domestic hot water operation*.

*Models with electric heater only.

*When the indoor unit operation stops, please check all settings after the outdoor unit is connected.



*SD logo is a trademark of SD-3C, LLC



SD* Card

For Easier Settings and Data Logging


The initial setting for ecodan is now simpler than ever before. The special software enables the required initial settings to be saved to an SD card using a personal computer. The system set-up is as easy as moving the SD card from the computer to the SD card slot in the indoor unit. Compared to the previous procedure of inputting settings using the main controller at the installation site, a remarkable reduction in set-up time has been achieved. Thus, it is ideal for busy installers.

*SD card function is only used at the time of installation.

Hydro box operation panel



Settings can be performed easily and the logging of operation data saved to an SD card can be confirmed via a personal computer.



Items that can be pre-set

Simply copying pre-set data to an SD card, the same settings can input into another unit using the SD card.

- Initial settings (time display, contact number, etc.)
- Heating settings
 - Auto adaptation
 - Heat curve
 - Two different temperature zones (heating and cooling)
- Interlocked boiler operation settings
- Holiday mode settings
- Schedule timer settings (two separate schedules)
- Domestic hot water settings
- Legionella prevention settings

All items that are set by the main controller can be set via a personal computer.

Data that can be stored


Operation data up to a month long can be stored on a single SD card

- Consumed electrical energy
- Delivered energy
- Flow rate
- Operation time
- Defrost time
- Actual temperature
 - Room temperature
 - Flow temperature
 - Return temperature
 - Domestic hot water temperature
 - Outdoor temperature
- Error record
- Input signal
- Etc.

ecodan geodan

Excellent Performance with Mitsubishi Electric First Residential Ground Source Heat Pump

Ground source heat pump works best especially in replacement from old ground source heat pump.

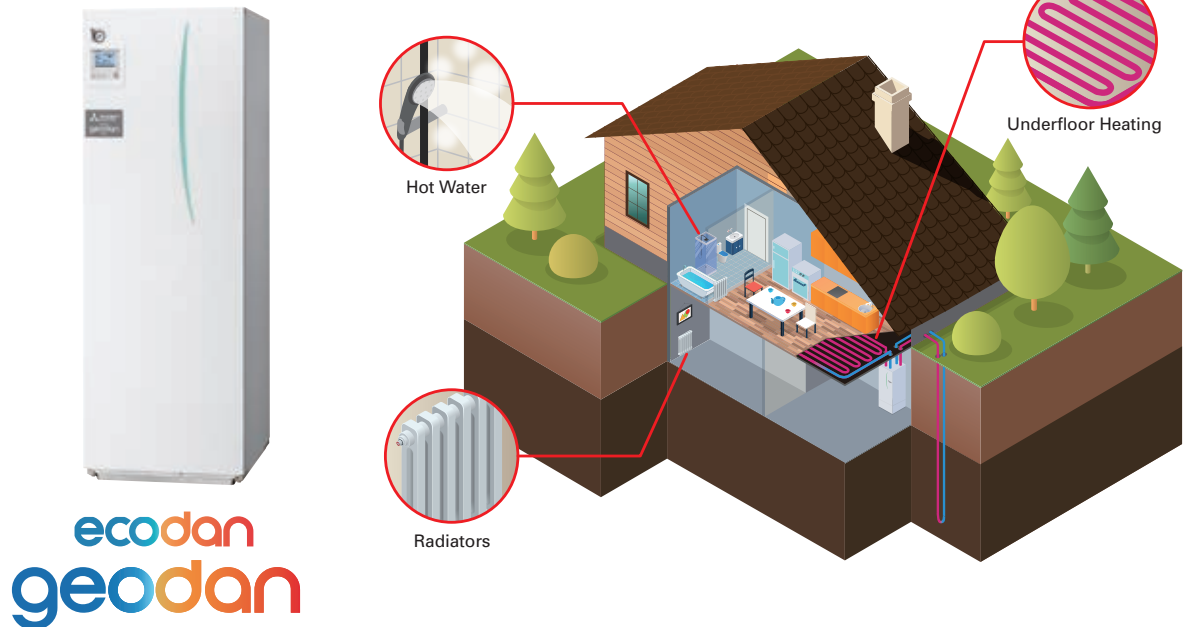

Performance / Function

High Performance


ErP Lot 1 Compliant with highest seasonal space heating energy efficiency class A+++.




TIME FOR
R32

Low GWP refrigerant R32 contributes the reduction of CO₂ emission compared with conventional R410A refrigerant.

A+++ Class Energy Efficiency

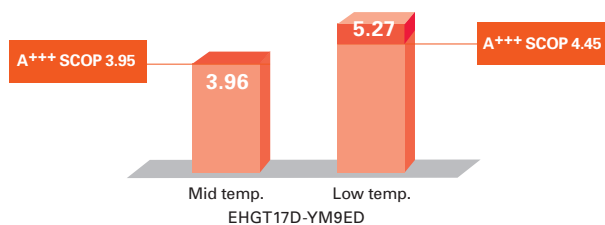

<ATW vs GSHP> CO₂ equivalent emission




Model name	PUHZ-SW75VAA	EHGT17D-YM9ED
Refrigerant amount	3.0kg	0.9kg
GWP	2088 (R410A)	675 (R32)
t-CO ₂ eq	6.264	0.608

*Source: IPCC 4th Assessment Report, global warming potential (GWP) 100-year value. Comparison of 2088(R410A) and 675 (R32).


New Compressor Frequency Control

By reducing frequency changes (from 17 to 4 times per hour), hunting is prevented. Reducing fluctuation improves efficiency and prolongs compressor life.

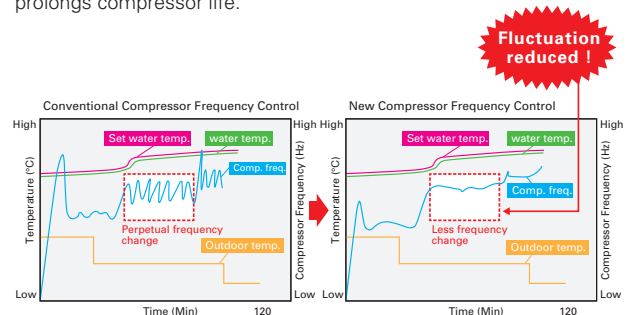

Borehole Protection Control

When the unit detects low underground temperature, it automatically reduces the capacity by decreasing heat source collection in order to protect the borehole.

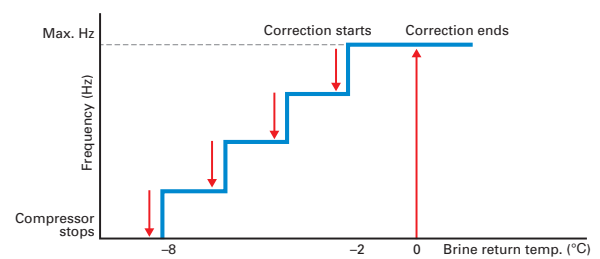


When the brine return temperature is below -8°C and brine outlet temperature is below -12°C, the unit operates only by booster heater. The correction temperature can be changed by dip SW.

Comfort with Silence

Mitsubishi Electric heat pumps are designed to give you highly efficient and eco-friendly heating with the lowest possible noise level. ecodan geodan achieved industry-leading low noise, 42dB(A)*.

* B0W35 Rated condition

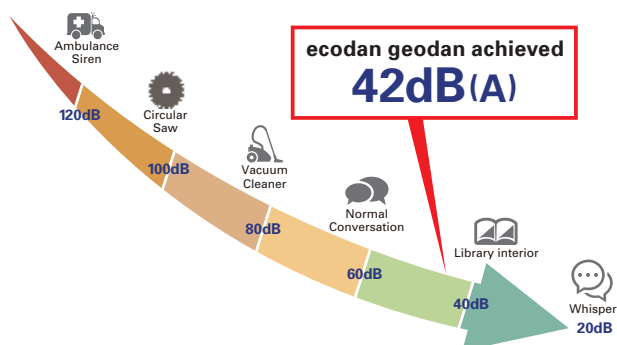

Silencing Noise

The triple covering structure of the compressor unit greatly reduces sound level through noise absorption.

1st Cover


Compressor sound insulation box
(with noise absorbing felt and damper)

2nd Cover

Module Box
(with noise absorbing felt)

3rd Cover

Outside panel
(with noise absorbing felt)

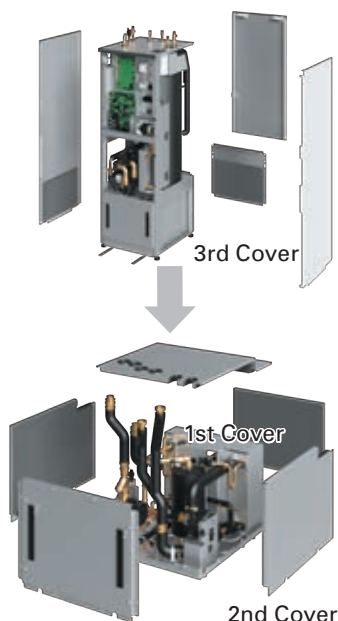


Avoiding Vibration Noise

Rubber mounted stabilizer plate cushions the vibration noise of the compressor



Easy Installation & Transportation

At only 1750mm, ecodan geodan is the class-leading compact unit on the market, making it the ideal solution for rooms and basements with a low ceiling height.

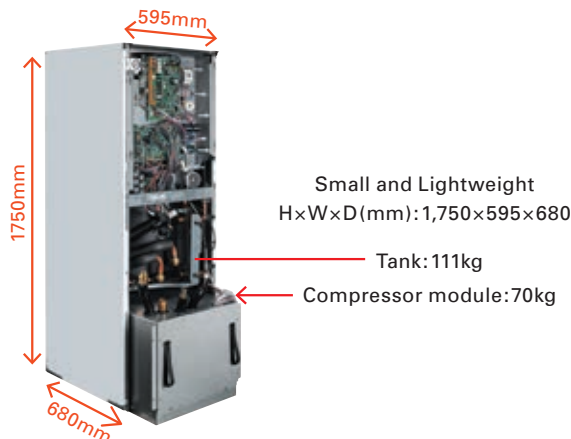

Easy Transportation

Compressor module can be removed for easier installation and transportation. Once removed, the tank can be transported horizontally.




Flexible Piping Work

Pipings on top are placed in a Zig-Zag shape. This enables easier installation without interrupting each piping work, especially in case of replacement.



Easy Adjustment

Adjust bolt capable of 50mm expansion for easy installation even on uneven surfaces.



Mr.SLIM+

A Smart Air Conditioning and Hot Water Supply System Conceived from Eco-conscious Ideas

Mr. SLIM+ has a heat recovery function, which uses waste heat from air conditioners to heat water. Thanks to heat recovery, the Mr. SLIM+ model can achieve a COP of 7.0*, resulting in intelligent systems with amazing efficiency.

*Conditions for air-to-air cooling: Indoor 27°C (dry bulb), 19°C (wet bulb); Outdoor 35°C (dry bulb)

1 Unit, 2 Roles – Total Comfort Year-round

Air Conditioning and Hot Water Supply Matching the Needs of Each Room


All-in-one outdoor unit (air conditioning, domestic hot water supply and hot water heating)

Mr. SLIM for Air-to-Air

Mr. SLIM+ utilises a duct system that enables the air conditioning or heating of multiple rooms, and other indoor unit type systems that it is possible to fit to various applications.

ecodan for Air-to-Water

- ✓Domestic hot water (DHW) supply
- ✓Heating for multiple rooms

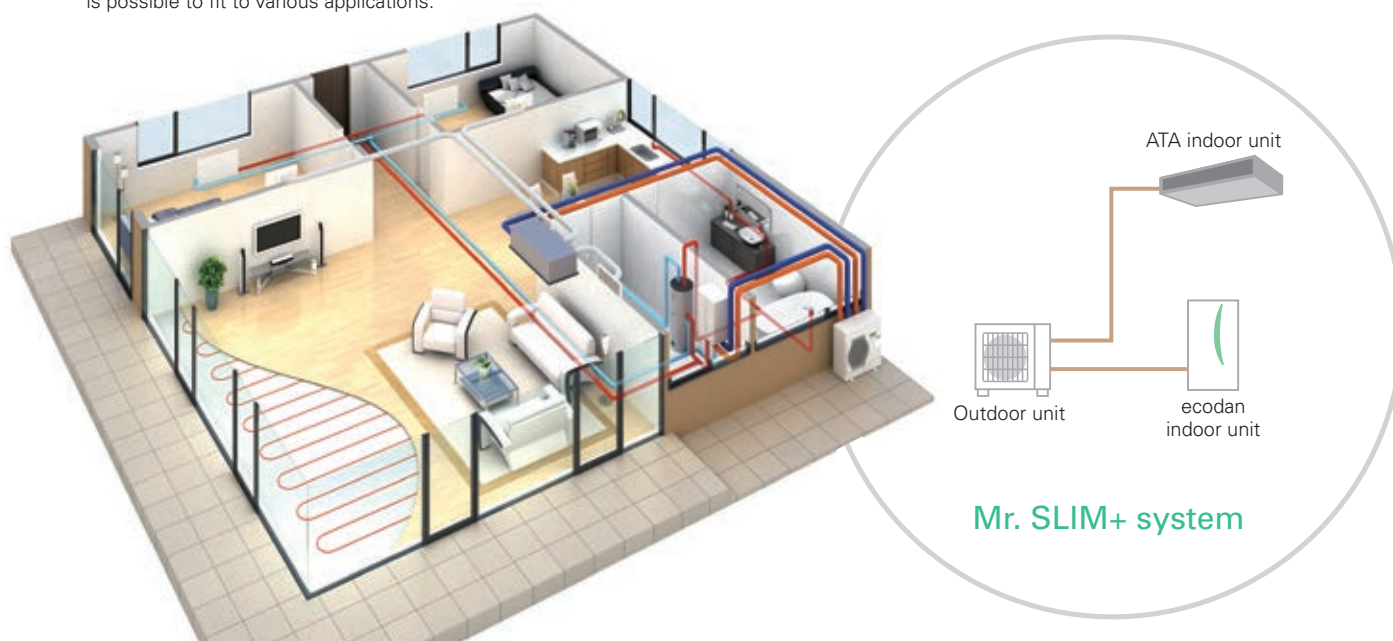

Various Operations

Mr. SLIM / ATA (Air Cooling)

Cooling using ATA indoor unit




Mr. SLIM / ATA (Air Heating)

Heating using ATA indoor unit




ecodan / ATW (Hot water heating + DHW)

Heating and DHW using ATW indoor unit

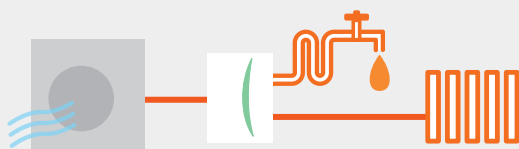

Mr. SLIM + ecodan / ATA (Air Cooling) + DHW

Heat recovery using both ATA and ATW indoor units

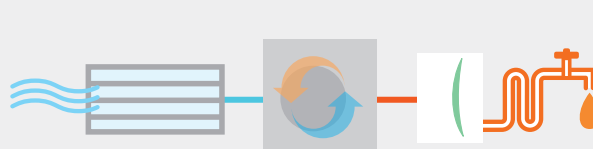

Specifications

Indoor unit				PLA-ZM71EA		PKA-M71KAL		PCA-M71KA		PSA-RP71KA		PEAD-M71JA		PEAD-M71JAL		
Outdoor unit				PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		PUHZ-FRP71VHA2		
Refrigerant				R410A*1												
Power supply		Outdoor (V / Phase / Hz)		230 / Single / 50												
Air-to-Air (ATA)	Cooling	Capacity	Rated	kW	7.1	7.1	7.1	7.1	7.1	7.1						
			Min-Max	kW	3.3-8.1	3.3-8.1	3.3-8.1	3.3-8.1	3.3-8.1	3.3-8.1						
		Total input	Rated	kW	1.88	1.93	1.93	2.15	2.10	2.04						
			EER			3.77	3.67	3.67	3.30	3.38	3.48					
		Design load		kW	7.1	7.1	7.1	7.1	7.1	7.1						
		Annual electricity consumption *2		kWh/a	376	386	384	409	444	427						
		SEER *4		6.6	6.4	6.4	6.0	5.5	5.8							
			Energy-efficiency class		A++	A++	A++	A+	A	A+						
		Heating (average season)	Capacity	Rated	kW	8.0	8.0	8.0	8.0	8.0	8.0					
				Min-Max	kW	3.5-10.2	3.5-10.2	3.5-10.2	3.5-10.2	3.5-10.2	3.5-10.2					
	Total input		Rated	kW	2.11	2.29	2.29	2.42	2.11	2.11						
			COP			3.80	3.50	3.50	3.30	3.79	3.79					
	Design load		kW	4.7	4.7	4.7	4.7	4.9	4.9							
	Declared capacity		at reference design temperature	kW	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.9 (−10°C)	4.9 (−10°C)						
			at bivalent temperature	kW	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.7 (−10°C)	4.9 (−10°C)	4.9 (−10°C)						
			at operation limit temperature	kW	3.5 (−20°C)	3.5 (−20°C)	3.5 (−20°C)	3.5 (−20°C)	3.7 (−20°C)	3.7 (−20°C)						
	Back-up heating capacity		kW	0	0	0	0	0	0							
	Annual electricity consumption *2		kWh/a	1,509	1,564	1,556	1,699	1,791	1,791							
	SCOP *4			4.3	4.2	4.2	3.8	3.8	3.8							
			Energy-efficiency class		A+	A+	A+	A	A	A						
	Air-to-Water (ATW)	Nominal flow rate (for heating)			L/min	22.90										
		Heating*5	A7W35	Capacity	kW	8.00	8.00	8.00	8.00	8.00	8.00					
Input				kW	1.98	1.98	1.98	1.98	1.98	1.98						
COP					4.05	4.05	4.05	4.05	4.05	4.05						
A2W35			Capacity	kW	7.50	7.50	7.50	7.50	7.50	7.50						
			Input	kW	2.67	2.67	2.67	2.67	2.67	2.67						
			COP		2.81	2.81	2.81	2.81	2.81	2.81						
Heat recovery (ATA cooling & ATW)*6		W45	Capacity (ATA cooling + ATW)	kW	7.1+8.0	7.1+8.0	7.1+8.0	7.1+8.0	7.1+8.0	7.1+8.0						
			Input	kW	1.90	1.93	1.95	2.02	2.15	2.13						
			COP		7.95	7.82	7.74	7.48	7.02	7.09						
		W55	Capacity (ATA cooling + ATW)	kW	7.1+9.0	7.1+9.0	7.1+9.0	7.1+9.0	7.1+9.0	7.1+9.0						
			Input	kW	2.97	3.00	3.02	3.09	3.22	3.20						
			COP		5.42	5.37	5.33	5.21	5.00	5.03						
ATW indoor unit				Cylinder unit or Hydro box (see previous page)												
Outdoor unit	Dimensions	HxWxD	mm	943-950-330 (+30)												
	Weight		kg	73	73	73	73	73	73							
	Air volume	Cooling	m³/min	50	50	50	50	50	50							
		Heating	m³/min	50	50	50	50	50	50							
	Sound pressure level (SPL)	Cooling	dB(A)	47	47	47	47	47	47							
		Heat recovery	dB(A)	47	47	47	47	47	47							
		ATA Heating	dB(A)	49	49	49	49	49	49							
		ATW Heating	dB(A)	49	49	49	49	49	49							
	Sound power level (PWL)	Cooling	dB(A)	67	67	67	67	67	67							
		Heat recovery	dB(A)	67	67	67	67	67	67							
		ATA Heating	dB(A)	68	68	68	68	68	68							
		ATW Heating	dB(A)	68	68	68	68	68	68							
	Operating current (max)			A	19.0	19.0	19.0	19.0	19.0	19.0						
Breaker size			A	25	25	25	25	25	25							
Ext.piping	Diameter	Liquid/Gas	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88							
	Max. length	Out-In	m	30 (for ATA) + 30 (for ATW)												
	Max. height	Out-In	m	20	20	20	20	20	20							
Guaranteed operating range (outdoor)		Cooling *3	°C	−15~+46	−15~+46	−15~+46	−15~+46	−15~+46	−15~+46							
		Heating	°C	−20~+21	−20~+21	−20~+21	−20~+21	−20~+21	−20~+21							
		ATW	°C	−20~+35	−20~+35	−20~+35	−20~+35	−20~+35	−20~+35							
		Heat recovery	°C	+7~+46	+7~+46	+7~+46	+7~+46	+7~+46	+7~+46							

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

*3 Optional air protection guide is required where ambient temperature is lower than -5°C.

*4 SEER/SCOP values are measured based on EN14825.

*5 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*6 Conditions for Air-to-Air cooling: Indoor 27°C (dry bulb) /19°C (wet bulb); Outdoor 35°C (dry bulb).

PUMY+ecodan

Air-to-Air and Air-to-Water Hybrid Multi Split System

1 Unit, 2 Roles – Total Comfort Year-round

Air Conditioning and Hot Water Supply Matching the Needs of Each Room


All-in-one outdoor unit (air conditioning, domestic hot water supply and hot water heating)

PUMY for Air-to-Air


PUMY utilises various indoor units, enabling the air conditioning or heating of multiple rooms, and controls each unit individually.

ecodan for Air-to-Water


- ✓Domestic hot water (DHW) supply
- ✓Heating for multiple rooms

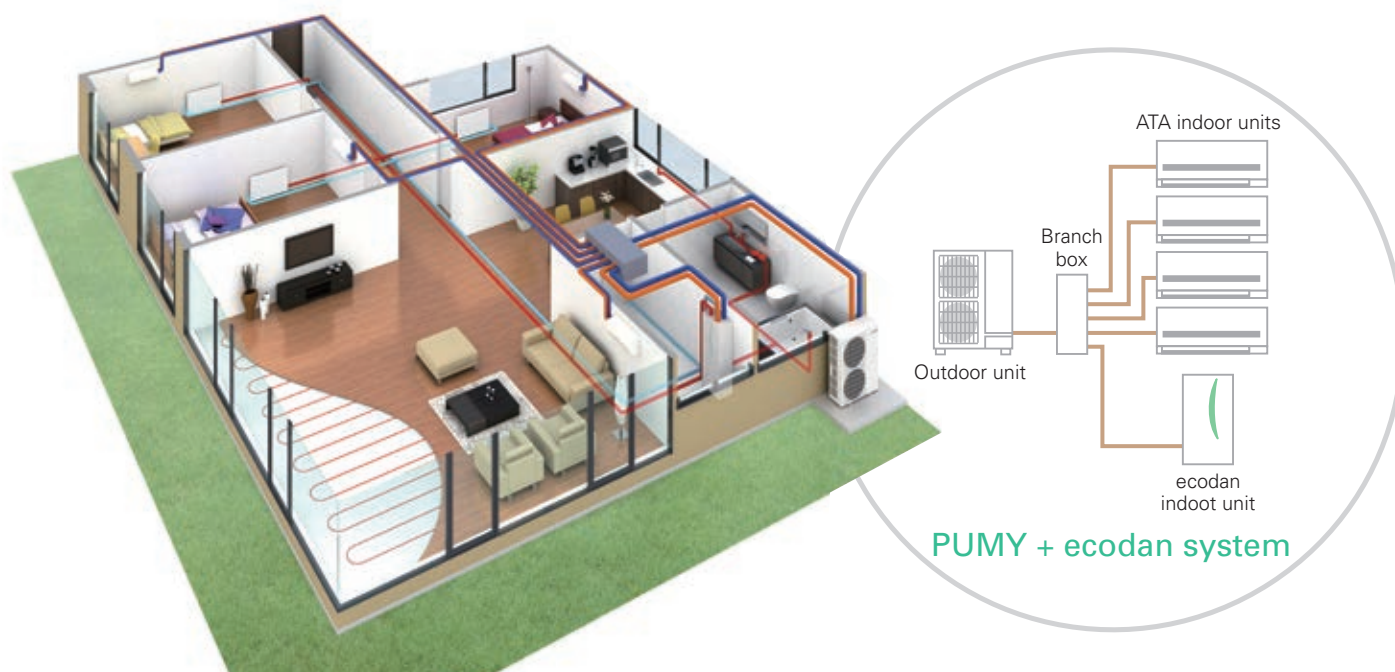

Main Operation Patterns

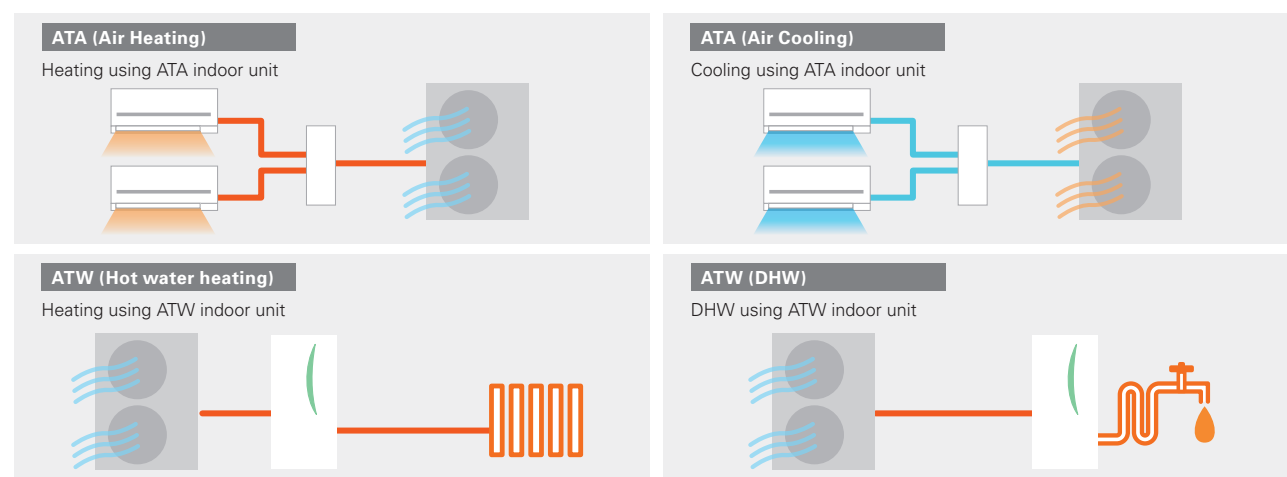

Optional Operation Patterns* (simultaneous)

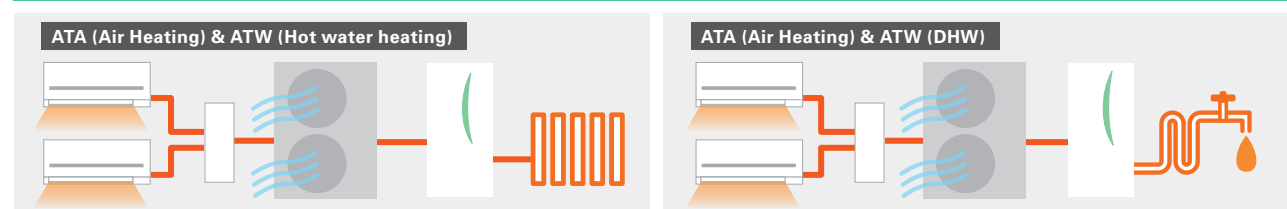


*When using optional simultaneous operation, there are some restrictions, such as connectable indoor units, operation range and DHW flow temp.

Usage Pattern All-in-one System Solution


Summer 2-in-1 Operation

In summer ATA cooling and DHW are utilised. Keep your room comfortable with ATA cooling during high temperature daytime. Heat pump operates to heat up water stored in the DHW tank when ATA is not operated. The hot water can be utilised for shower and washing dishes during daytime.

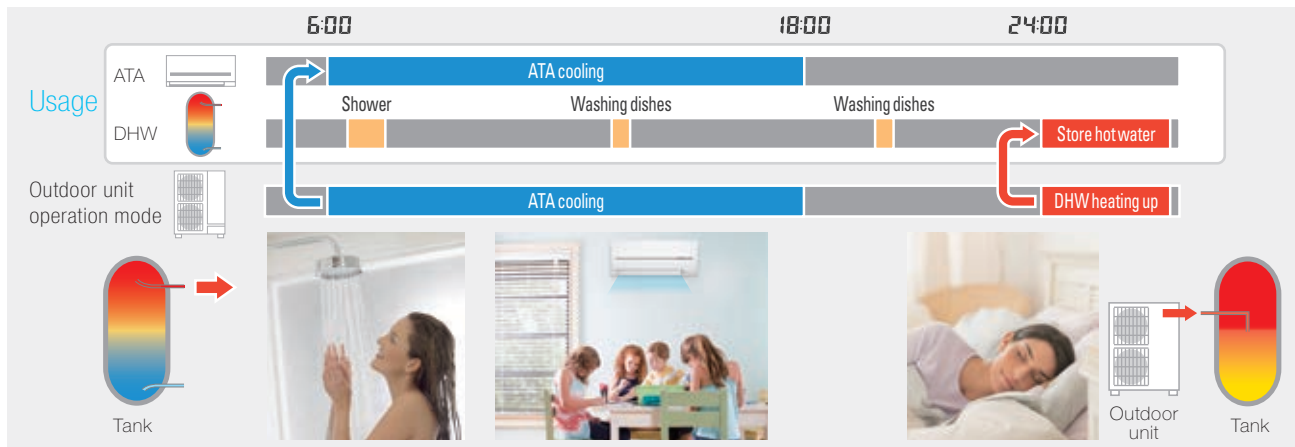


Spring & Autumn 2-in-1 Operation

In spring and autumn, ATA heating and DHW are utilised. ATA heating can warm up each room quickly during the low temperature morning and evening. Heat pump operates to heat up water stored in the DHW tank when ATA is not operated. The hot water can be utilised for shower and washing dishes during daytime.

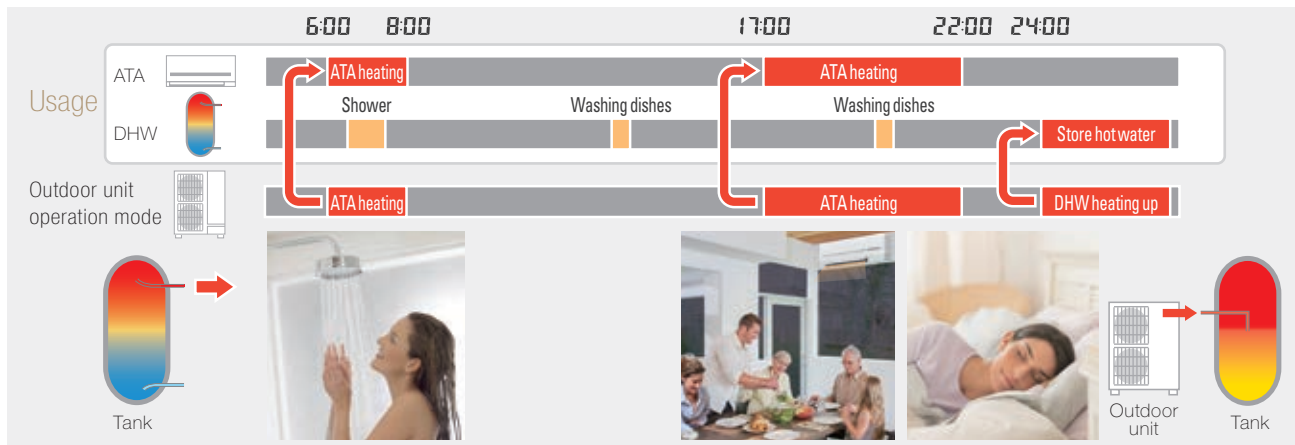

Winter ecodan

In winter ATW heating and DHW are utilised. ATW heating warms home all the day in severe cold weather. ATW heating stops temporarily only when the heat pump operates to heat up water stored in the DHW tank.

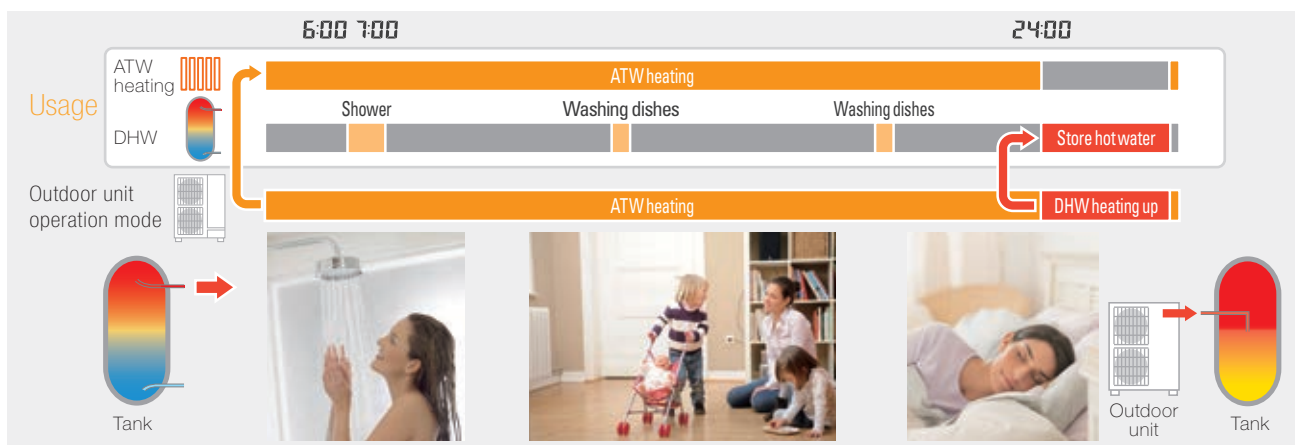

Model name				PUMY- P112VKM4(-BS)	PUMY- P125VKM4(-BS)	PUMY- P140VKM4(-BS)	PUMY- P112YKM(E)4(-BS)	PUMY- P125YKM(E)4(-BS)	PUMY- P140YKM(E)4(-BS)			
Power supply				1-phase 220 - 230 - 240V, 50Hz			3-phase 380 - 400 - 415V, 50Hz					
Air-to-Air (ATA)	Cooling (nominal)*1	Capacity	kW	12.5	14.0	15.5	12.5	14.0	15.5			
		Power input	kW	2.79	3.46	4.52	2.79	3.46	4.52			
		EER		4.48	4.05	3.43	4.48	4.05	3.43			
	Temp. range of cooling	Indoor temp.	W.B.	15 - 24°C								
		Outdoor temp.*2	D.B.	-5 - 52°C								
	Heating (nominal)*1	Capacity	kW	14.0	16.0	18.0	14.0	16.0	18.0			
		Power input	kW	3.04	3.74	4.47	3.04	3.74	4.47			
		COP		4.61	4.28	4.03	4.61	4.28	4.03			
	Temp. range of heating	Indoor temp.	W.B.	15 - 27°C								
		Outdoor temp.	D.B.	-20 - 15°C								
Air-to-Water (ATW)	Nominal flow rate (for heating)			L/min								
	Heating*3	A7W35	Capacity	kW								
			Power input	kW								
			COP									
		A2W35	Capacity	kW								
			Power input	kW								
			COP									
	Guaranteed operating range	ATW	Heating	D.B.								
			DHW	D.B.								
		ATA + ATW	ATA heating + DHW	D.B.								
			ATA heating + ATW heating *4	D.B.								
	Maximum Outlet water temp.			°C								
Outdoor unit	Indoor unit connectable	ATA only	Total capacity		50 to 130% of outdoor unit capacity							
			Model/ Quantity	Branch box system	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8		
				Mixed system*12	15-140*5/10	15-140*5/10*6	15-140*5/10*6	15-140*5/10	15-140*5/10*6	15-140*5/10*6		
		ATA + ATW individual operation	Total capacity		ATA : Max 130% of outdoor unit capacity + ATW (EHST20C or EHSC) *7							
			Model/Quantity (including ATW)	Branch box system	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8	15-100/8		
				Mixed system*12	15-140*5/10	15-140*5/10*6	15-140*5/10*6	15-140*5/10	15-140*5/10*6	15-140*5/10*6		
		ATA + ATW simultaneous operation	Total capacity		Max 100% of outdoor unit capacity : ATA + ATW (EHST20C or EHSC) *7							
			Model/Quantity	ATA*12	15/1*8	15-25/2*9	15-42*11/3*10	15/1*8	15-25/2*9	15-42*11/3*10		
				ATW	ATW (EHST20C or EHSC) / 1							
		Sound pressure level (measured in anechoic room)			dB<A>		49 / 51	50 / 52	51 / 53	49 / 51	50 / 52	51 / 53
		Sound power level (measured in anechoic room)			dB<A>		69 / 71	70 / 72	71 / 73	69 / 71	70 / 72	71 / 73
		Refrigerant piping diameter			Liquid pipe		mm					
				Gas pipe		mm						
	Fan	Type × Quantity			9.52 flare							
					15.88 flare							
					Propeller fan × 2							
					110							
		Airflow rate			L/s							
					1,883							
	Compressor	Motor output			cfm							
					3,884							
					kW							
					0.074 + 0.074							
		Type × Quantity			Scroll hermetic compressor × 1							
Starting method			Inverter									
Motor output					kW							
					2.9	3.5	3.9	2.9	3.5	3.9		
External dimensions (H × W × D)			mm		1,338 × 1,050 × 330 (+40)							
Weight			kg		122				YKM: 125 / YKMF: 136			

*1

	Indoor	Outdoor	Piping length	Level difference
Cooling	27°C DB / 19°C WB	35°C DB	7.5m	0m
Heating	20°C DB	7°C DB / 6°C WB	7.5m	0m

*2 10 to 52°C D.B.: When connecting PKFY-P15/20/25VBM, PFFY-P20/25/32VKM, PFFY-P20/25/32VLE(R)M, PEFY-P*VMA3 or M, S and P series indoor unit.

*3 In the case of ATW single connection. Input to circulation pump is not included.

*4 In the case of simultaneous operation of ATA heating and ATW heating, target flow temperature range is restricted to 45-55°C and when the ambient temp is under 7°C, the flow temp is lowered.

*5 Up to P100 when connecting via branch box.

*6 Up to 11 units when connecting via 2 branch boxes.

*7 Only one ecodan unit can be connected.

*8 Exceptionally, one MSZ-SF15VA or MSZ-AP15VF can be connected.

*9 Exceptionally, two MSZ-SF15VA or MSZ-AP15VF can be connected.

*10 Exceptionally, three MSZ-SF15VA or MSZ-AP15VF can be connected.


*11 In the case of City Multi connection, maximum is P32.

*12 PKFY and PFFY series are not connectable.

Piping specifications

Total piping length	m	150*	a+b+c+d+e+f
Farthest piping length	m	80	a+b+d or a+c+e
		85	a+f
Total piping length between outdoor unit and branch box	m	55	a+b+c
Total piping length between branch boxes and indoor units	m	95	d+e
Farthest piping length from the first joint	m	30	b or c or f
Farthest piping length after branch box	m	25	d or e
Height difference (Outdoor upside / Outdoor downside)	m	50 / 40	

*When an ecodan is connected, the maximum piping length is 150m.

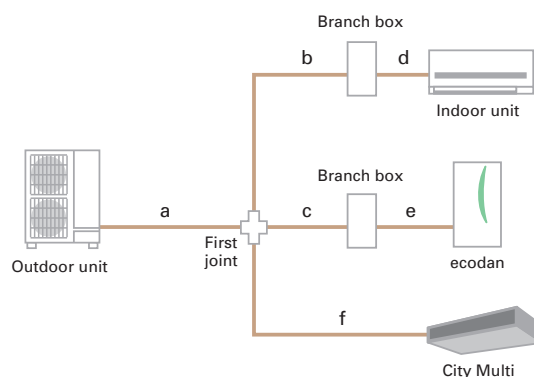

PUMY+ ecodan Compatibility Table

ATW branch box connection compatibility table

Series	Type	Model name	Compatibility	Type	Model name	Compatibility	Type	Model name	Compatibility
ATW	Cylinder unit	EHST20C-VM2/6D	●	Hydro box	EHSC-VM2/6D	●	Branch box	PAC-MK53BC	●
		EHST20C-YM9D	●		EHSC-YM9D	●		PAC-MK33BC	●
		EHST20C-TM9D	●		EHSC-TM9D	●		PAC-MK53BCB	●
		EHST20C-YM9ED	●		EHSC-YM9ED	●		PAC-MK33BCB	●

Branch box connection compatibility table

Series	Type	Model name	Capacity										
			15	18	20	22	25	35	42	50	60	71	100
M series	Wall-mounted	MSZ-LN•VG					●	●		●			
		MSZ-AP•VG	●		●		●	●	●	●			
		MSZ-FH•VE2					●	●		●			
		MSZ-EF•VG		●		●	●	●	●	●			
		MSZ-SF•VA	●		●								
		MSZ-SF•VE3					●	●	●	●			
		MSZ-GF•VE2									●	●	
	Floor-standing	MFZ-KJ•VE2					●	●		●			
S series	1-way cassette	MLZ-KP•VF					●	●		●			
	Ceiling-concealed	SEZ-M•DA(L)					●	●		●	●	●	
	2x2 cassette	SLZ-M•FA	●				●	●		●			
P series	Ceiling-suspended	PCA-M•KA						●		●	●	●	●
	4-way cassette	PLA-M•EA						●		●	●	●	●
	Ceiling-concealed	PEAD-M•JA(L)								●	●	●	●

LEV kit connection compatibility table

Series	I/U type	Model name	Capacity									
			15	18	20	22	25	35	42	50	60	71
M series	Wall-mounted	MSZ-LN•VG					●	●		●		
		MSZ-AP•VG	●		●		●	●	●	●		
		MSZ-FH•VE2					●	●		●		
		MSZ-EF•VG		●		●	●	●	●	●		
		MSZ-SF•VA	●		●							
		MSZ-SF•VE3					●	●	●	●		
	Floor-standing	MFZ-KJ•VE2					●	●		●		

Connectable indoor unit capacity

For individual operation ATA+ATW (no simultaneous operation) ATA: Max 130% of outdoor unit capacity + ATW (EHST20C or EHSC)

Outdoor capacity 12.5kW		
ATW indoor unit (Cylinder or Hydro box) 11.2kW	Connectable ATA indoor unit total capacity: Max.16.2kW (130%)	
Outdoor capacity 14.0kW		
ATW indoor unit (Cylinder or Hydro box) 11.2kW	Connectable ATA indoor unit total capacity: Max.18.2kW (130%)	
Outdoor capacity 15.5kW		
ATW indoor unit (Cylinder or Hydro box) 11.2kW	Connectable ATA indoor unit total capacity: Max.20.2kW (130%)	

For simultaneous operation of ATA+ATW Max 100% of outdoor unit capacity: ATA + ATW (EHST20C or EHSC)

Outdoor capacity 12.5kW			
ATW indoor unit (Cylinder or Hydro box) 11.2kW	ATA capacity Max. 1.3kW	*Exceptionally, one MSZ-SF15VA or MSZ-AP15VF can be connected.	
Outdoor capacity 14.0kW			
ATW indoor unit (Cylinder or Hydro box) 11.2kW	ATA capacity Max. 2.8kW	*Exceptionally, two units of MSZ-SF15VA or MSZ-AP15VF can be connected.	
Outdoor capacity 15.5kW			
ATW indoor unit (Cylinder or Hydro box) 11.2kW	ATA capacity Max. 4.3kW	*Exceptionally, three units of MSZ-SF15VA or MSZ-AP15VF can be connected.	

Split Type Specifications

Indoor unit

<Cylinder unit (Heating only)>

<Cylinder unit (Heating only)>				Small capacity																
Model name					EHST17D-VM2D	EHST20D-MED	EHST20D-VM2D	EHST20D-VM6D	EHST20D-VM9D	EHST20D-VM9ED	EHST20D-TM9D	EHST30D-MED	EHST30D-VM6ED	EHST30D-VM9ED	EHST30D-TM9ED					
			Type		Heating only															
			Expansion vessel		✓	—	✓	✓	✓	—	✓	—	—	—	—					
			Booster heater (2/6/9kW)		✓	—	✓	✓	✓	✓	✓	—	✓	✓	✓					
Dimensions		HxWxD	mm	1400x595x680							1600x595x680							2050x595x680		
Weight (empty)			kg	93	98	104	105	106	101	106	113	115	116	116	116					
Control Board Power supply (Phase / V / Hz)				~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz	~ /N,230V, 50Hz					
Heater	Booster heater	Power supply (Phase / V / Hz)		~ /N,230V, 50Hz	—	~ /N,230V, 50Hz	~ /N,230V, 50Hz	3 ~, 400V, 50Hz	3 ~, 400V, 50Hz	3 ~, 230V, 50Hz	—	~ /N,230V, 50Hz	3 ~, 400V, 50Hz	3 ~, 230V, 50Hz						
		Capacity	kW	2	—	2	2+4	3+6	3+6	3+6	—	2+4	3+6	3+6						
		Current	A	9	—	9	26	13	13	23	—	26	13	23						
		Breaker size	A	16	—	16	32	16	16	32	—	32	16	32						
Domestic hot water tank	Volume / Material		L / -	170 / Stainless steel	200 / Stainless steel							300 / Stainless steel								
Guaranteed operating range *1	Ambient		°C	0 - 35 (≦80%RH)																
	Outdoor	Heating	°C	See outdoor unit spec table																
		Cooling	°C	—																
Target temperature range	Heating	Room temperature	°C	10 - 30																
		Flow temperature	°C	20 - 60																
	Cooling	Room temperature	°C	—																
		Flow temperature	°C	—																
DHW tank performance	Max. hot water temperature		°C	70	*2	70							*2	70						
	Water heater energy efficiency class			A+								A - A+								
Sound pressure level (PWL)			dB (A)	41																

*1 The indoor environment must be frost-free.

*2 For the model without booster heater and immersion heater, the maximum allowable hot water temperature is 3°C lower than maximum outlet water of outdoor unit.
For the maximum outlet water of outdoor unit, refer to outdoor unit data book.

<Cylinder unit (Heating only)>

<Cylinder unit (Heating only)>				Medium capacity										
Model name			Type	EHST20C-MED	EHST20C-VM2D	EHST20C-VM6D	EHST20C-VM9D	EHST20C-VM9ED	EHST20C-TM9D	EHST30C-MED	EHST30C-VM6ED	EHST30C-VM9ED	EHST30C-TM9ED	
				Heating only										
				—	✓	✓	✓	—	✓	—	—	—	—	
				—	✓	✓	✓	✓	✓	—	✓	✓	✓	
Dimensions		HxWxD	mm	1600x595x680						2050x595x680				
Weight (empty)			kg	106	113	114	115	109	115	118	120	121	121	
Control Board Power supply (Phase / V / Hz)				~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	
Heater	Booster heater	Power supply (Phase / V / Hz)		—	~ /N,230V,50Hz	~ /N,230V,50Hz	3 ~,400V,50Hz	3 ~,400V,50Hz	3 ~,400V,50Hz	—	~ /N,230V,50Hz	3 ~,400V,50Hz	3 ~,230V,50Hz	
		Capacity		kW	—	2	2+4	3+6	3+6	3+6	—	2+4	3+6	3+6
		Current		A	—	9	26	13	13	23	—	26	13	23
		Breaker size		A	—	16	32	16	16	32	—	32	16	32
Domestic hot water tank	Volume / Material		L / -	200 / Stainless steel						300 / Stainless steel				
Guaranteed operating range *1	Ambient		°C	0 - 35 (≦80%RH)										
	Outdoor	Heating	°C	See outdoor unit spec table										
		Cooling	°C	—										
Target temperature range	Heating	Room temperature		°C	10 - 30									
		Flow temperature		°C	20 - 60									
	Cooling	Room temperature		°C	—									
		Flow temperature		°C	—									
DHW tank performance		Max. hot water temperature		°C	*2	70					*2	70		
		Water heater energy efficiency class			A+					A				
Sound pressure level (PWL)			dB (A)	40										

*1 The indoor environment must be frost-free.

*2 For the model without booster heater and immersion heater, the maximum allowable hot water temperature is 3°C lower than maximum outlet water of outdoor unit.
For the maximum outlet water of outdoor unit, refer to outdoor unit data book.

<Hydro box (Heating only)>

<Hydro box (Heating only)>			Small capacity							Medium capacity							Large capacity	
Model name		Type	EHSD-MED	EHSD-VM2D	EHSD-VM6D	EHSD-VM9D	EHSD-VM9ED	EHSD-TM9D	EHSC-MED	EHSC-VM2D	EHSC-VM6D	EHSC-VM9D	EHSC-VM9ED	EHSC-TM9D	EHSE-VM9ED	EHSE-MED		
			Heating only															
Expansion vessel		—	✓	✓	✓	—	✓	—	✓	✓	✓	—	✓	—	—	—		
Booster heater (2/6/9 kW)		—	✓	✓	✓	✓	✓	✓	—	✓	✓	✓	✓	✓	✓	—		
Dimensions		HxWxD	mm	800x530x360												950x600x360		
Weight (empty)			kg	36	43	44	44	40	44	40	47	48	48	43	48	63	61	
Control Board Power supply (Phase / V / Hz)				~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	~ /N,230V,50Hz	
Heater	Booster heater	Power supply (V / Phase / Hz)		—	~ /N,230V,50Hz	~ /N,230V,50Hz	3 ~,400V,50Hz	3 ~,400V,50Hz	3 ~,230V,50Hz	—	~ /N,230V,50Hz	~ /N,230V,50Hz	3 ~,400V,50Hz	3 ~,400V,50Hz	3 ~,230V,50Hz	3 ~,400V,50Hz	—	
		Capacity	kW	—	2	2+4	3+6	3+6	3+6	—	2	2+4	3+6	3+6	3+6	3+6	—	
		Current	A	—	9	26	13	13	23	—	9	26	13	13	23	13	—	
		Breaker size	A	—	16	32	16	16	32	—	16	32	16	16	32	16	—	
Guaranteed operating range *1	Ambient		L / -	0 - 35 (≤80%RH)														
	Outdoor	Heating	°C	See outdoor unit spec table														
		Cooling	°C	—														
Target temperature range	Heating	Room temperature	°C	10 - 30														
		Flow temperature	°C	20 - 60														
	Cooling	Room temperature	°C	—														
		Flow temperature	°C	—														
Sound pressure level (PWL)			dB (A)	41					40					45				

*1 The indoor environment must be frost-free.

Split Type Specifications

Indoor unit

<Cylinder unit (Reversible)>

<Cylinder unit (Reversible)>			Small capacity			Medium capacity		
Model name			ERST17D-VM2D	ERST20D-VM2D	ERST30D-VM2ED	ERST20C-VM2D	ERST30C-VM2ED	
	Type	Heating and Cooling						
	Expansion vessel	✓	✓		✓	—		
	Booster heater (2/6/9kW)	✓	✓	✓	✓	✓		
Dimensions	HxWxD	mm	1400x595x680	1600x595x680	2050x595x680	1600x595x680	2050x595x680	
Weight (empty)		kg	93	104	114	113	120	
Control Board Power supply (Phase / V / Hz)			~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	
Heater	Booster heater	Power supply (V / Phase / Hz)	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	
		Capacity	kW	2	2	2	2	2
		Current	A	9	9	9	9	9
		Breaker size	A	16	16	16	16	16
Domestic hot water tank	Volume / Material		L / -	170 / Stainless steel	200 / Stainless steel	300 / Stainless steel	200 / Stainless steel	300 / Stainless steel
Guaranteed operating range *1	Ambient		°C	0 - 35 (≦80%RH)				
	Outdoor	Heating	°C	See outdoor unit spec table				
		Cooling	°C	See outdoor unit spec table *2				
Target temperature range	Heating	Room temperature	°C	10 - 30				
		Flow temperature	°C	20 - 60				
	Cooling	Room temperature	°C	—				
		Flow temperature	°C	5 - 25				
DHW tank performance		Max. hot water temperature	°C	70				
		Water heater energy efficiency class		A+	A+	A - A+	A+	A
Sound pressure level (PWL)			dB (A)	41			40	

*1 The indoor environment must be frost-free.

*2 During cooling operation at low outdoor temperature (10°C or lower), frozen water may cause damage on plate heat exchanger.

<Hydro box (Reversible)>

<Hydro box (Reversible)>			Small capacity		Medium capacity		Large capacity			
Model name			ERSD-MED	ERSD-VM2D	ERSC-MED	ERSC-VM2D	ERSE-YM9ED	ERSE-MED		
			Type		Heating only					
			Expansion vessel		—	✓	—	✓	—	—
			Booster heater (2/6/9kW)		—	✓	—	✓	✓	—
Dimensions		HxWxD	mm	800x530x360				950x600x360		
Weight (empty)			kg	38	44	40	47	64	62	
Control Board Power supply (Phase / V / Hz)				~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	~ /N, 230V, 50Hz	
Heater	Booster heater	Power supply (V / Phase / Hz)		—	~ /N, 230V, 50Hz	—	~ /N, 230V, 50Hz	3 ~ , 400V, 50Hz	—	
		Capacity	kW	—	2	—	2	3+6	—	
		Current	A	—	9	—	9	13	—	
		Breaker size	A	—	16	—	16	16	—	
Guaranteed operating range *1	Ambient			0 - 35 (≤80%RH)						
	Outdoor	Heating	°C	See outdoor unit spec table						
		Cooling	°C	See outdoor unit spec table						
Target temperature range	Heating	Room temperature	°C	10 - 30						
		Flow temperature	°C	20 - 60						
	Cooling	Room temperature	°C	—						
		Flow temperature	°C	5-25						
Sound pressure level (PWL)			dB (A)	41		40		45		

*1 The indoor environment must be frost-free

*2 If you use our system in cooling mode at the low ambient temperature (10°C or below), there are some risks of plate heat exchanger breaking by frozen water.

Split Type Specifications

Outdoor unit

Outdoor unit				Eco Inverter		
Model name				SUZ-SWM40VA	SUZ-SWM60VA	SUZ-SWM80VA
Refrigerant				R32*1		
Dimensions		H×W×D	mm	880×840×330	880×840×330	880×840×330
Weight			kg	54	54	54
Power supply (V / Phase / Hz)				230 / 1-ph / 50	230 / 1-ph / 50	230 / 1-ph / 50
Heating	A7W35*2	Nominal	kW	4.0	6.0	7.5
		COP		5.20	4.86	4.70
	A2W35*2	Nominal	kW	4.0	5.0	6.5
		COP		3.90	3.33	3.40
		Average climate water outlet 35°C*3		Class	A+++	A+++
		ηs	180	181	182	
Average climate water outlet 55°C*3	Class		A++	A++	A++	
	ηs		129	130	131	
DHW 200L(L) Load Profile (Average climate)*4	Class		A+	A+	A+	
	ηwh		159	148	148	
Max outlet water temperature (°C)				60	60	60
Cooling	A35W7*2	Nominal	kW	4.5	5.0	5.4
		EER		3.29	3.03	3.00
	A35W18*2	Nominal	kW	5.6	6.0	6.3
		EER		4.97	4.88	4.80
		PWL (Heating)*5		dB(A)	58	60
Max operating current			A	13.9	13.9	13.9
Breaker size			A	16	16	16
Piping	Diameter	Liquid/Gas	mm	6.35 / 12.7	6.35 / 12.7	6.35 / 12.7
	Length	Out-In	m	5-30	5-30	5-30
	Height	Out-In	m	Max 30	Max 30	Max 30
Guaranteed Operating Range	Heating	°C		-20°C~24°C	-20°C~24°C	-20°C~24°C
	DHW	°C		-20°C~35°C	-20°C~35°C	-20°C~35°C
	Cooling	°C		10°C~46°C	10°C~46°C	10°C~46°C

Outdoor unit

Outdoor unit				Power Inverter, Heating only				ZUBADAN, Heating only				
Model name				PUD-SWM60VAA	PUD-SWM80V/YAA	PUD-SWM100V/YAA	PUD-SWM120V/YAA	PUD-SHWM60VAA	PUD-SHWM80V/YAA	PUD-SHWM100V/YAA	PUD-SHWM120V/YAA	PUD-SHWM140V/YAA
Refrigerant				R32*1								
Dimensions		HxWxD	mm	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480	1020x1050x480
Weight			kg	101	101/114	105/118	105/118	102	102/115	108/121	108/121	110/122
Power supply (V / Phase / Hz)				VAA: 230 / 1-ph / 50, YAA: 400 / 3-ph / 50								
Heating	A7W35*2	Nominal	kW	5.0	6.0	8.0	10.0	5.0	6.0	8.0	10.0	12.0
		COP		4.76	4.76	4.95	4.70	4.94	5.00	5.00	4.80	4.70
	A2W35*2	Nominal	kW	6.0	8.0	10.0	12.0	6.0	8.0	10.0	12.0	14.0
		COP		3.60	3.55	3.30	3.24	3.80	3.75	3.45	3.30	3.05
Average climate water outlet 35°C*3		Class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
		ηs		175	178/176	178/177	177/176	178	181/179	180/178	179/177	179/177
Average climate water outlet 55°C*3		Class		A++	A++	A++	A++	A++	A++	A++	A++	A++
		ηs		130	131/130	131/130	129/128	134	135/134	136/135	135/134	134/134
DHW 200L(L)/300L(XL) Load Profile (Average climate)*4		Class		A+ / A	A+ / A	A+ / A	A+ / A	A+ / A	A+ / A	A+ / A	A+ / A	A+ / A
		ηwh		148/121	148/121	148/121	148/121	148/121	148/121	148/121	148/121	145/121
Max outlet water temperature (°C)				60	60	60	60	60	60	60	60	60
PWL (Heating)*5			dB(A)	55	56	59	60	55	56	59	60	62
Max operating current			A	16.5	22/8	26/10	28/12	16.5	22/8	26/10	28/12	35/12
Breaker size			A	20	25/16	30/16	32/16	20	25/16	30/16	32/16	40/16
Piping	Diameter	Liquid/Gas	mm	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7	6.35/12.7
	Length	Out-In	m	2 - 30	2 - 30	2 - 30	2 - 30	2 - 30	2 - 30	2 - 30	2 - 30	2 - 25
	Height	Out-In	m	Max. 30	Max. 30	Max. 30	Max. 30	Max. 30	Max. 30	Max. 30	Max. 30	Max. 25
Guaranteed Operating Range	Heating		°C	-25°C-24°C	-25°C-24°C	-25°C-24°C	-25°C-24°C	-28°C-24°C	-28°C-24°C	-28°C-24°C	-28°C-24°C	-28°C-24°C
	DHW		°C	-25°C-35°C	-25°C-35°C	-25°C-35°C	-25°C-35°C	-28°C-35°C	-28°C-35°C	-28°C-35°C	-28°C-35°C	-28°C-35°C

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*3 ηs values are measured based on EN14825. *4 ηwh values are measured based on EN16147. *5 Sound power levels are measured based on EN12102.

Split type

Small capacity (Under 5kW)*

Medium capacity (6.0kW~14kW)*



Eco Inverter



SUZ-SWM40/60



PUD-SHWM60/80/100/120/140



PUD-SWM60/80/100/120



SUZ-SWM80

*Rated capacity is at conditions A2W35. (according to EN14511)

Split Type Specifications

Outdoor unit


Outdoor unit				Power Inverter				
Model name				PUHZ-SW75V/YAA(-BS)	PUHZ-SW100V/YAA(-BS)	PUHZ-SW120V/YHA(-BS)	PUHZ-SW160YKA(-BS)	PUHZ-SW200YKA(-BS)
Refrigerant				R410A*1				
Dimensions		HxWxD	mm	1020×1050×480	1020×1050×480	1350×950×330	1338×1050×330	1338×1050×330
Weight			kg	92/104	114/126	118/130	136	136
Power supply (V / Phase / Hz)				VAA, VHA: 230 / 1-ph / 50, YAA, YHA, YKA: 400 / 3-ph / 50				
Heating	A7W35*2	Nominal	kW	8.0	11.2	16.0	22.0	25.0
		COP		4.40	4.46	4.10	4.20	4.00
	A2W35*2	Nominal	kW	7.5	10.0	12.0	16.0	20.0
		COP		3.40	3.32	3.24	3.11	2.80
Average climate water outlet 35°C*3		Class		A++	A++	A++	A++	A++
		ηs		162/160	167/165	162/162	161	163
Average climate water outlet 55°C*3		Class		A++	A++	A++	A++	A++
		ηs		129/128	130/129	125/125	125	127
DHW 200L(L)/300L(XL) Load Profile (Average climate)*4		Class		A+ / A	A+ / A	A+ / A	–	–
		ηwh		145/120	145/120	138/118	–	–
Max outlet water temperature (°C)				60	60	60	–	–
Cooling	A35W7*2	Nominal	kW	7.1	10.0	12.5	16.0	20.0
		EER		2.70	2.83	2.32	2.76	2.25
	A35W18*2	Nominal	kW	7.1	10.0	14.0	18.0	22.0
		EER		4.43	4.47	4.08	4.56	4.1
PWL (Heating)*5			dB(A)	58	60	72	78	78
Max operating current			A	22.0/11.5	28.0/12.0	29.5/13.0	19.0	21.0
Breaker size			A	25/16	32/16	32/16	25	32
Piping	Diameter	Liquid/Gas	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/25.4	12.7/25.4
	Length	Out-In	m	40	75	75	80	80
	Height	Out-In	m	10	10	30	30	30
Guaranteed Operating Range	Heating		°C	–20°C~21°C	–20°C~21°C	–20°C~21°C	–20°C~21°C	–20°C~21°C
	DHW		°C	–20°C~35°C	–20°C~35°C	–20°C~35°C	–20°C~35°C	–20°C~35°C
	Cooling		°C	–15°C~46°C	–15°C~46°C	–15°C~46°C	–15°C~46°C	–15°C~46°C

				ZUBADAN			
Model name				PUHZ-SHW80V/YAA(-BS)	PUHZ-SHW112V/YAA	PUHZ-SHW140YHA	PUHZ-SHW230YKA2
Refrigerant				R410A*1			
Dimensions		HxWxD	mm	1020x1050x480	1020x1050x480	1350x950x330	1338x1050x330
Weight			kg	116/128	116/128	134	143
Power supply (V / Phase / Hz)				VAA, VHA: 230 / 1-ph / 50, YAA, YHA, YKA: 400 / 3-ph / 50			
Heating	A7W35*2	Nominal	kW	8.0	11.2	14.0	23.0
		COP		4.65	4.40	4.22	3.65
	A2W35*2	Nominal	kW	8.0	11.2	14.0	23.0
		COP		3.55	3.22	2.96	2.37
Average climate water outlet 35°C*3		Class		A++	A++	A++	A++
		ηs		169/167	171/169	163	164
Average climate water outlet 55°C*3		Class		A++	A++	A++	A++
		ηs		133/132	135/135	127	127
DHW 200L(L)/300L(XL) Load Profile (Average climate)*4		Class		A+ / A	A+ / A	A+ / A	–
		ηwh		145/120	145/120	138/118	–
Max outlet water temperature (°C)				60	60	60	60
Cooling	A35W7*2	Nominal	kW	7.1	10.0	12.5	20.0
		EER		3.31	2.83	2.17	2.22
	A35W18*2	Nominal	kW	7.1	10	12.5	20.0
		EER		4.52	4.74	4.26	3.55
PWL (Heating)*5			dB(A)	59	60	70	75
Max operating current			A	22/13	28/13	13	20
Breaker size			A	25/16	32/16	16	25
Piping	Diameter	Liquid/Gas	mm	9.52/15.88	9.52/15.88	9.52/15.88	12.7/25.4
	Length	Out-In	m	75	75	75	80
	Height	Out-In	m	30	30	30	30
Guaranteed Operating Range	Heating		°C	–28°C~21°C	–28°C~21°C	–28°C~21°C	–25°C~21°C
	DHW		°C	–28°C~35°C	–28°C~35°C	–28°C~35°C	–25°C~35°C
	Cooling		°C	–15°C~46°C	–15°C~46°C	–15°C~46°C	–15°C~46°C

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

*2 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*3 ηs values are measured based on EN14825. *4 ηwh values are measured based on EN16147. *5 Sound power levels are measured based on EN12102.

R410A Split type		Medium capacity (7.5kW~14kW)		Large capacity (≥16kW)	
					
		PUHZ-SHW80/112AA	PUHZ-SHW140	PUHZ-SHW230	
					
		PUHZ-SW75/100AA	PUHZ-SW120	PUHZ-SW160/200	

Packaged Type Specifications

Indoor unit

<Cylinder unit (Heating only)>

Model name			EHPT17X- VM2D	EHPT17X- VM6D	EHPT17X- VM9D	EHPT20X- MED	EHPT20X- VM6D	EHPT20X- YM9D	EHPT20X- YM9ED	EHPT20X- TM9D	EHPT20X- MHEDW	EHPT30X- MED	EHPT30X- YM9ED																
Type			Heating only																										
Immersion heater			-	-	-	-	-	-	-	-	✓	-	-																
Expansion vessel			✓	✓	✓	-	✓	✓	-	✓	-	-	-																
Booster heater			✓	✓	✓	-	✓	✓	✓	✓	-	-	✓																
Dimensions			H×W×D		mm		1400×595-680						1600×595×680		2050×595×680														
Weight (empty)					kg		85		86		87		93		101		102		96		102		90		106		109		
Control board power supply (Phase / V / Hz)							~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		~N, 230V, 50Hz		
Heater	Booster heater*2	Power supply (Phase / V / Hz)				~N, 230V, 50Hz		~N, 230V, 50Hz		3~, 400V, 50Hz		-		~N, 230V, 50Hz		3~, 400V, 50Hz		3~, 400V, 50Hz		3~, 230V, 50Hz		-		~N, 230V, 50Hz		-		3~, 400V, 50Hz	
		Capacity		kW		2		2+4		3+6		-		2+4		3+6		3+6		3+6		-		-		-		3+6	
		Current		A		9		26		13		-		26		13		13		23		-		-		-		13	
		Breaker size		A		16		32		16		-		32		16		16		32		-		-		-		16	
	Immersion heater	Power supply (Phase / V / Hz)				-		-		-		-		-		-		-		-		~N, 230V, 50Hz		-		-		-	
		Capacity		kW		-		-		-		-		-		-		-		-		3		-		-		-	
		Current		A		-		-		-		-		-		-		-		-		13		-		-		-	
		Breaker size		A		-		-		-		-		-		-		-		-		16		-		-		-	
Domestic hot water tank	Volume / Material		L / -		170 / Stainless steel				200 / Stainless steel								300 / Stainless steel												
Guaranteed operating range*1	Ambient	°C		0 - 35 (≤80%RH)																									
	Outdoor	Heating	°C		See outdoor unit spec table																								
		Cooling	°C		-																								
Target temperature range	Heating	Room temperature	°C		10~30																								
		Flow temperature	°C		20~60																								
	Cooling	Room temperature	°C		-																								
		Flow temperature	°C		-																								
DHW tank performance	Max. hot water temperature		°C		70				*3		70				*3		70												
	Water heater energy efficiency class				A+																								
Sound pressure level (PWL)			dB (A)		40																								

*1 The indoor environment must be frost-free.

*2 Do not fit immersion heaters without thermal cut-out. Use only Mitsubishi Electric service parts as a direct replacement.

*3 For the model without booster heater and immersion heater, the maximum allowable hot water temperature is 3°C lower than maximum outlet water of outdoor unit.
For the maximum outlet water of outdoor unit, refer to outdoor unit data book.

<Cylinder unit (Reversible)>

Model name			ERPT17X-VM2D	ERPT20X-MD	ERPT20X-VM2D	ERPT20X-VM6D	ERPT30X-VM2ED		
Type			Heating and cooling						
			Immersion heater						
			Expansion vessel						
			Booster heater						
Dimensions			H×W×D	mm	1400×595×680		1600×595×680	2050×595×680	
Weight (empty)			kg	86	99	100	101	107	
Control board power supply (Phase / V / Hz)				~N, 230V, 50Hz		~N, 230V, 50Hz			
Heater	Booster heater	Power supply (Phase / V / Hz)			~N, 230V, 50Hz		~N, 230V, 50Hz		
		Capacity	kW	2	—	2	2+4	2	
		Current	A	9	—	9	26	9	
		Breaker size	A	16	—	16	32	16	
	Immersion heater*2	Power supply (Phase / V / Hz)			—		—		
		Capacity	kW	—	—	—	—	—	
		Current	A	—	—	—	—	—	
		Breaker size	A	—	—	—	—	—	
Domestic hot water tank	Volume / Material		L / —	170 / Stainless steel	200 / Stainless steel			300 / Stainless steel	
Guaranteed operating range*1	Ambient			0 - 35 (≤80%RH)					
	Outdoor	Heating	°C		See outdoor unit spec table				
		Cooling	°C		See outdoor unit spec table*3				
Target temperature range	Heating	Room temperature	°C		10~30				
		Flow temperature	°C		20~60				
	Cooling	Room temperature	°C		—				
		Flow temperature	°C		5~25				
DHW tank performance	Max. hot water temperature		°C		70				
	Water heater energy efficiency class			A+			A		
Sound pressure level (PWL)			dB (A)		40				

*1 The indoor environment must be frost-free.

*2 Do not fit immersion heaters without thermal cut-out. Use only Mitsubishi Electric service parts as a direct replacement.

*3 During cooling operation at low outdoor temperature (10°C or lower), frozen water may cause damage on plate heat exchanger.

<Hydro box (Heating only)>

Model name			EHPX-MED	EHPX-VM2D	EHPX-VM6D	EHPX-VM9D	EHPX-VM9ED	
	Type		Heating only					
	Immersion heater		-	-	-	-	-	
	Expansion vessel		-	✓	✓	✓	-	
	Booster heater		-	✓	✓	✓	✓	
Dimensions		H×W×D	mm	800×530×360				
Weight (empty)			kg	28	35	37	37	32
Control board power supply (Phase / V / Hz)			~N, 230V, 50Hz					
Heater	Booster heater	Power supply (Phase / V / Hz)	-	~N, 230V, 50Hz				3~, 400V, 50Hz
		Capacity	kW	-	2	2+4	3+6	3+6
		Current	A	-	9	26	13	13
		Breaker size	A	-	16	32	16	16
Guaranteed operating range*1	Ambient		°C	0-35 (≤80%RH)				
	Outdoor	Heating	°C	See outdoor unit spec table				
		Cooling	°C	-				
Target temperature range	Heating	Room temperature	°C	10-30				
		Flow temperature	°C	20-60				
	Cooling	Room temperature	°C	-				
		Flow temperature	°C	-				
Sound pressure level (PWL)			dB (A)	40				

*1 The indoor environment must be frost-free.

Outdoor unit

Model name				PUZ-WM50VHA	PUZ-WM60VAA	PUZ-WM85V/YAA	PUZ-WM112V/YAA
Refrigerant				R32*1			
Dimensions		HxWxD	mm	943x950x330	1020x1050x480	1020x1050x480	1020x1050x480
Weight			kg	71	98	98/111	119/132
Power supply (V / Phase / Hz)				VHA + VAA: 230 / 1-ph / 50, YHA + YAA: 400 / 3-ph / 50			
Heating	A7W35*2	Nominal	kW	5.0	6.0	8.5	11.2
		COP		5.00	5.06	4.80	4.70
	A2W35*2	Nominal	kW	5.0	6.0	8.5	11.2
		COP		3.70	3.75	3.51	3.44
Average climate water outlet 35°C*3		Class	A+++	A+++	A+++	A+++	
		ηs	183	190	193/190	191/189	
Average climate water outlet 55°C*3		Class	A++	A++	A++	A++	
		ηs	129	142	139/138	134/133	
DHW 200(L) Load Profile (Average climate)*4		Class	A+	A+	A+	A+	
		ηwh	135	145	145	148	
Max outlet water temperature (°C)				60	60	60	60
Cooling	A35W7*2	Nominal	kW	4.5	6.0	7.5	10.0
		EER		3.40	3.30	3.15	3.30
	A35W18*2	Nominal	kW	4.5	6.0	7.5	10.0
		EER		5.00	4.45	4.90	4.90
PWL (Heating)*5			dB(A)	61	58	58	60
Max operating current			A	13.0	13.0	22.0/11.5	28.0/13.0
Breaker size			A	16	16	25/16	32/16
Piping	Diameter	Liquid/Gas	mm	-	-	-	-
	Length	Out-In	m	-	-	-	-
	Height	Out-In	m	-	-	-	-
Guaranteed Operating Range	Heating		°C	-20°C~21°C	-20°C~21°C	-20°C~21°C	-25°C~21°C
	DHW		°C	-20°C~35°C	-20°C~35°C	-20°C~35°C	-25°C~35°C
	Cooling		°C	10°C~46°C	10°C~46°C	10°C~46°C	10°C~46°C

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 Air-to-Water values are measured based on EN14511 (Circulation pump input is not included.).

*3 ηs values are measured based on EN14825.

*4 ηwh values are measured based on EN16147.

*5 Sound power levels are measured based on EN12102.



Packaged type

Small capacity
(Under 5kW)*

Medium capacity
(6.0kW~11.2kW)*



PUZ-WM50



PUHZ-WM60/85/112

*Rated capacity is at conditions A2W35. (according to EN14511)

Optional Parts

Split type

<Indoor unit>

Parts name	Model name	Cylinder	Hydrobox	Remarks
Wireless remote controller	PAR-WT50R-E	✓	✓	
Wireless receiver	PAR-WR51R-E	✓	✓	
Thermistors	PAC-SE41TS-E	✓	✓	For room temp.
	PAC-TH011-E	✓	✓	For buffer and zone (flow and return temp.)
	PAC-TH011TK2-E	-	✓	For tank temp. (5m)
	PAC-TH011TKL2-E	-	✓	For tank temp. (30m)
	PAC-TH012HT-E	✓	✓	For boiler and buffer (5m)
	PAC-TH012HTL-E	✓	✓	For boiler and buffer (30m)
Immersion heater	PAC-IH01V2-E	✓	-	1Ph 1kW
	PAC-IH03V2-E	✓	-	1Ph 3kW
Joint pipe	PAC-SG72RJ-E	✓	✓	For PUHZ-SW75 ø6.35 → ø9.52
	PAC-SG73RJ-E	-	✓	For PUHZ-SW200YKA/SHW230YKA2 ø9.52 → ø12.7
	PAC-SG74RJ-E	✓	✓	For PUHZ-SW75 ø12.7 → ø15.88
	PAC-SH30RJ-E	✓	✓	For PUHZ-SW75AA ø9.52 → 6.35
	PAC-SH50RJ-E	✓	✓	For PUHZ-SW75AA ø15.88 → 12.7
	PAC-SH50RJ-E	✓	✓	
Wi-Fi interface	MAC-S67IF-E	✓	✓	
2 Zone kit	PAC-TZ02-E	✓	✓	
Expansion vessel	PAC-EVP12-E	✓	-	12L

<Outdoor unit>

Parts name	Model name	R32 (Eco Inverter)			R32 Heating only (Power Inverter)				R32 Heating only (ZUBADAN)				
		SUZ-SWM40VA	SUZ-SWM60VA	SUZ-SWM80VA	PUD-SWM60VAA	PUD-SWM80VYAA	PUD-SWM100VYAA	PUD-SWM120VYAA	PUD-SHWM60VAA	PUD-SHWM80VYAA	PUD-SHWM100VYAA	PUD-SHWM120VYAA	PUD-SHWM140VYAA
Connector for drain hose heater signal output	PAC-SE60RA-E	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Air discharge guide	MAC-886SG-E	✓	✓	✓	-	-	-	-	-	-	-	-	-
	PAC-SG59SG-E	-	-	-	-	-	-	-	-	-	-	-	-
	PAC-SH96SG-E	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Air protection guide	PAC-SH63AG-E	-	-	-	-	-	-	-	-	-	-	-	-
	PAC-SH95AG-E	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Attachement	PAC-SJ82AT-E	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Drain socket*	PAC-SG61DS-E	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Centralized drain pan*	PAC-SG64DP-E	-	-	-	-	-	-	-	-	-	-	-	-
	PAC-SH97DP-E	-	-	-	-	-	-	-	-	-	-	-	-
	PAC-SJ83DP-E	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Base heater	MAC-642BH-U1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Control/Service tool	PAC-SK52ST	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓

Parts name	Model name	R410A (Power Inverter)					R410A (ZUBADAN)			
		PUHZ-SW75VYAA	PUHZ-SW100VYAA	PUHZ-SW120VYHA	PUHZ-SW160YKA	PUHZ-SW200YKA	PUHZ-SHW80VYAA	PUHZ-SHW112VYAA	PUHZ-SHW140YHA	PUHZ-SHW230YKA
Connector for drain hose heater signal output	PAC-SE60RA-E	✓	✓	✓	✓	✓	✓	✓	✓	✓
Air discharge guide	MAC-886SG-E	-	-	-	-	-	-	-	-	-
	PAC-SG59SG-E	-	-	✓	-	-	-	-	✓	-
	PAC-SH96SG-E	✓	✓	✓	✓	✓	✓	✓	-	✓
Air protection guide	PAC-SH63AG-E	-	-	✓	-	-	-	-	✓	-
	PAC-SH95AG-E	✓	✓	-	✓	✓	✓	✓	-	✓
Attachement	PAC-SJ82AT-E	✓	✓	-	-	-	✓	✓	-	✓
Drain socket*	PAC-SG61DS-E	✓	✓	✓	✓	✓	✓	✓	-	-
Centralized drain pan*	PAC-SG64DP-E	-	-	✓	-	-	-	-	-	-
	PAC-SH97DP-E	-	-	-	✓	✓	-	-	-	-
	PAC-SJ83DP-E	✓	✓	-	-	-	✓	✓	-	-
Base heater	MAC-642BH-U1	-	-	-	-	-	-	-	-	-
Control/Service tool	PAC-SK52ST	✓	✓	✓	✓	✓	✓	✓	✓	✓

*Cannot be used for cold climate.

Interface/Flow Temperature Controller

Split type

Parts name	Model name	Description
Capacity step control interface	PAC-IF011B-E	1 PC board w/ Case
Flow temperature controller	PAC-IF032B-E	1 PC board w/ Case
	PAC-IF033B-E	1 PC board w/ Case
	PAC-IF033PCB-E	10 PC board w/o case
	PAC-IF071B-E	1 PC board w/ Case
System Controllers	PAC-IF071B-E	1 PC board w/ Case
Pressure sensor	PAC-PS01-E	For SUZ-SWM40/60/80VA
Flow sensor	PAC-FS01-E	
Thermistor	PAC-TH011-E	

Optional Parts

Packaged type

<Indoor unit>

Parts name	Model name	Cylinder	Hydrobox	Remarks
Wireless remote controller	PAR-WT50R-E	✓	✓	
Wireless receiver	PAR-WR51R-E	✓	✓	
Thermistors	PAC-SE41TS-E	✓	✓	For room temp.
	PAC-TH011-E	✓	✓	For buffer and zone (flow and return temp.)
	PAC-TH011TK2-E	–	✓	For tank temp. (5m)
	PAC-TH011TKL2-E	–	✓	For tank temp. (30m)
	PAC-TH012HT-E	✓	✓	For boiler and buffer (5m)
	PAC-TH012HTL-E	✓	✓	For boiler and buffer (30m)
Immersion heater	PAC-IH01V2-E	✓ (Except EHPT20X-MHEDW)	–	1Ph 1kW
	PAC-IH03V2-E	✓ (Except EHPT20X-MHEDW)	–	1Ph 3kW
EHPT accessories for UK	PAC-WK02UK-E	✓	–	
Wi-Fi interface	MAC-567F-E	✓	✓	
2 Zone kit	PAC-TZ02-E	✓	✓	
Expansion vessel	PAC-EVP12-E	✓	–	12L

<Outdoor unit>

Parts name	Model name	R32 (Power Inverter)			
		PUZ-WM50VHA	PUZ-WM60VAA	PUZ-WM85V/YAA	PUZ-WM112V/YAA
Connector for drain hose heater signal output	PAC-SE60RA-E	✓	✓	✓	✓
Air discharge guide	PAC-SG59SG-E	✓	–	–	–
	PAC-SH96SG-E	–	✓*	✓*	✓*
Air protection guide	PAC-SH63AG-E	✓	–	–	–
	PAC-SH95AG-E	–	✓*	✓*	✓*
Attachment	PAC-SJ82AT-E	–	✓	✓	✓
Drain socket	PAC-SG61DS-E	✓	✓	✓	✓
Centralized drain pan	PAC-SG64DP-E	✓	–	–	–
	PAC-SJ83DP-E	–	✓	✓	✓

*Attachment (PAC-SJ82AT-E) is necessary for the Air Guide.



Ground Source Heat Pump Specifications

Specification with 38% propylene glycol

Model name			EHGT17D-YM9ED		
Heating Capacity (Min-Max)			2.5-10.0kW		
Heat Output B0/W35 (Rated)			5.0kW		
COP B0/W35			4.58		
SCOP (Average Climate)	Low Temp		5.27		
		Rank	A+++		
	η_s^{*2}	203%			
	Mid Temp		3.96		
		Rank	A+++		
	η_s^{*2}	150%			
	η_{wh}	134%			
L Load Profile (Average Climate)*3	Rank	A*			
Sound Power Level (Rated)*4			42dB(A)		
Refrigerant /Amount			R32*1/0.9kg		
GWP			608		
Dimensions (HxWxD)			1,750mm×595mm×680mm		
DHW Tank			170L		
Weight			Unit 181kg		
Electrical data	Heat pump	Power supply	3ph/400V/50Hz		
		Max current	8A		
		Breaker	16A		
	Booster heater	Power supply	3ph/400V/50Hz		
		Capacity	3kW+6kW		
		Current	13A		
		Breaker	16A		
Connections	Water	Primary circuit	ø28mm		
		DHW circuit	ø22mm		
	Brine	Brine circuit	ø28mm		
Operating range	Heating	Room temperature	10-30°C		
		Flow temperature	20-60°C		
	DHW		40-60°C		
		Legionella prevention		60-70°C	
Guaranteed operating range		Ambient	0-35°C		
			≤80%RH		
		Water outlet temperature	20-60°C		
		Brine inlet temperature	-8-30°C		
		Min. brine outlet temperature	-12°C		
Flow rate range	Primary circuit	Max.	27.7L/min		
		Min.	7.1L/min		
	Brine circuit	Max.	27.7L/min		
		Min.	7.1L/min		
Heat source fluid type			29 WT% Bioethanol		
			38 WT% Propylene glycol		
			25 WT% Ethylene glycol		

*1 Refrigerant leakage contribute to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.

*2 η_{gs} values are measured based on EN14825. *3 η_{wh} values are measured based on EN16147. *4 Sound power levels are measured based on EN12102.

Interface/Flow Temperature Controller

Packaged type

Parts name	Model name	Description
Flow temperature controller	PAC-IF033B-E	1 PC board w/ Case
	PAC-IF033PCB-E	10 PC board w/o case
System Controllers	PAC-IF072B-E	
Flow sensor	PAC-FS01-E	
Thermistor	PAC-TH011-E	

D Generation

Combination Table

Split Indoor/outdoor unit

Split indoor/outdoor unit combination		R32										R410A						ATA/ATW Hybrid system								
		Power inverter					ZUBADAN					Power inverter			ZUBADAN			Mr. SUM+	PUMY							
		SUZ-SWM40VA	SUZ-SWM60VA	SUZ-SWM80VA	PUD-SWM60VAA	PUD-SWM80V/YAA	PUD-SWM100V/YAA	PUD-SWM120V/YAA	PUD-SHWM60VAA	PUD-SHWM80V/YAA	PUD-SHWM100V/YAA	PUD-SHWM120V/YAA	PUD-SHWM140V/YAA	PUHZ-SW75V/YAA	PUHZ-SW100V/YAA	PUHZ-SW120V/YHA	PUHZ-SW160YKA	PUHZ-SW200YKA	PUHZ-SHW60V/YAA	PUHZ-SHW112V/YAA	PUHZ-SHW140YHA	PUHZ-SHW230YKA2	PUHZ-FRP71VHA2	PUMY-P112V/YKME/4	PUMY-P125V/YKME/4	PUMY-P140V/YKME/4
Heating only Cylinder	EHST17D-VM2D	●	●	●	●	●			●	●			●													
	EHST20D-MED	●	●	●	●	●	●	●	●	●	●	●	●													
	EHST20D-VM2D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHST20D-VM6D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHST20D-YM9D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHST20D-YM9ED	●	●	●	●	●	●	●	●	●	●	●	●													
	EHST20D-TM9D	●	●					●	●	●	●	●	●													
	EHST30D-MED			●	●	●	●	●	●	●	●	●	●													
	EHST30D-VM6ED			●	●	●	●	●	●	●	●	●	●													
	EHST30D-YM9ED			●	●	●	●	●	●	●	●	●	●													
	EHST30D-TM9ED			●	●	●	●	●	●	●	●	●	●													
	EHST20C-MED													●	●			●	●	●		●				
	EHST20C-VM2D													●	●	●		●	●	●		●	●	●	●	●
	EHST20C-VM6D													●	●			●	●	●		●	●	●	●	●
	EHST20C-YM9D													●	●			●	●	●		●	●	●	●	●
	EHST20C-YM9ED													●	●			●	●	●		●	●	●	●	●
	EHST20C-TM9D													●	●			●	●	●		●	●	●	●	●
	EHST30C-MED													●	●			●	●	●						
	EHST30C-VM6ED													●	●			●	●	●						
	EHST30C-YM9ED													●	●			●	●	●						
	EHST30C-TM9ED													●	●			●	●	●						
Reversible Cylinder	ERST17D-VM2D	●	●	●	●	●			●	●			●													
	ERST20D-VM2D	●	●	●	●	●	●	●	●	●	●	●	●													
	ERST30D-VM2ED			●	●	●	●	●	●	●	●	●	●													
	ERST20C-VM2D													●	●			●	●	●						
	ERST30C-VM2ED													●	●			●	●	●						
Heating only Hydro box	EHSD-MED	●	●	●	●	●	●	●	●	●	●	●	●													
	EHSD-VM2D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHSD-VM6D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHSD-YM9D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHSD-YM9ED	●	●	●	●	●	●	●	●	●	●	●	●													
	EHSD-TM9D	●	●	●	●	●	●	●	●	●	●	●	●													
	EHSC-MED													●	●			●	●	●		●				
	EHSC-VM2D													●	●			●	●	●		●	●	●	●	●
	EHSC-VM6D													●	●			●	●	●		●	●	●	●	●
	EHSC-YM9D													●	●			●	●	●		●	●	●	●	●
	EHSC-YM9ED													●	●			●	●	●		●	●	●	●	●
	EHSC-TM9D													●	●			●	●	●		●	●	●	●	●
	EHSE-YM9ED															●	●				●					
	EHSE-MED															●	●				●					
Reversible Hydro box	ERSD-MED	●	●	●	●	●	●	●	●	●	●	●	●													
	ERSD-VM2D	●	●	●	●	●	●	●	●	●	●	●	●													
	ERSC-MED													●	●			●	●	●						
	ERSC-VM2D													●	●			●	●	●						
	ERSE-YM9ED															●	●				●					
	ERSE-MED															●	●				●					

Packaged indoor/outdoor unit

Packaged indoor/outdoor unit combination		R32		
		Power inverter		
Heating only Cylinder	EHPT17X-VM2D	●	●	●
	EHPT17X-VM6D	●	●	●
	EHPT17X-YM9D	●	●	●
	EHPT20X-MED	●	●	●
	EHPT20X-VM6D	●	●	●
	EHPT20X-YM9D	●	●	●
	EHPT20X-YM9ED	●	●	●
	EHPT20X-TM9D	●	●	●
	EHPT20X-MHEDW	●	●	●
	EHPT30X-MED		●	●
	EHPT30X-YM9ED		●	●
Reversible Cylinder	ERPT17X-VM2D	●	●	●
	ERPT20X-VM2D	●	●	●
	ERPT20X-MD	●	●	●
	ERPT20X-VM6D	●	●	●
	ERPT30X-VM2ED		●	●
Heating only Hydro box	EHPX-VM2D	●	●	●
	EHPX-VM6D	●	●	●
	EHPX-YM9D	●	●	●
	EHPX-MED	●	●	●
	EHPX-YM9ED	●	●	●

MELCloud (Wi-Fi Interface) for ecodan

MELCloud for Fast, Easy Remote Control and Monitoring of Your ecodan

MELCloud is a new Cloud-based solution for controlling ecodan either locally or remotely by computer, tablet or smartphone via the Internet. Setting up and remotely operating your ecodan heating system via MELCloud is simple and straight forward. All you need is wireless computer connectivity in your home or the building where the ecodan is installed and an Internet connection on your mobile or fixed terminal. To set up the system, the router and the ecodan WiFi interface must be paired, and this is done simply and quickly using the WPS button found on all mainstream routers.

You can control and check ecodan via MELCloud from virtually anywhere an Internet connection is available.

That means, thanks to MELCloud, you can use ecodan much more easily and conveniently.



Key Control and Monitoring Features

- 1 Turn system on/off
- 2 See status of each of your heating zones & adjust set points
- 3 See the status of your hot water cylinder & boost remotely
- 4 Live weather feed from ecodan location
 - Holiday mode - Set system parameters while away
 - Schedule timer - Set 7 day weekly schedule
 - Frost protection - Set system to run at minimum temperature
 - Error status
- 5 Check energy usage report* *Additional metering hardware is required.



All A++ or Above!!

Outdoor unit	Indoor unit	For medium-temperature application							For low-temperature application						
		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor
				kW	%	%	dB	dB			kW	%	%	dB	dB
SUZ-SWM40VA	EHST17D-***D	A++	A+	4.6	129	148	41	58	A+++	A+	5.1	180	148	41	58
	ERST17D-***D	A++	A+	4.6	132	148	41	58	A+++	A+	5.1	187	148	41	58
	EHST20D-***D	A++	A+	4.6	129	159	41	58	A+++	A+	5.1	180	159	41	58
	ERST20D-***D	A++	A+	4.6	132	159	41	58	A+++	A+	5.1	187	159	41	58
	EHSD-***D	A++	–	4.6	129	–	41	58	A+++	–	5.1	180	–	41	58
	ERSD-***D	A++	–	4.6	132	–	41	58	A+++	–	5.1	187	–	41	58
SUZ-SWM60VA	EHST17D-***D	A++	A+	6.0	130	144	41	60	A+++	A+	6.6	181	144	41	60
	ERST17D-***D	A++	A+	6.0	133	144	41	60	A+++	A+	6.6	187	144	41	60
	EHST20D-***D	A++	A+	6.0	130	148	41	60	A+++	A+	6.6	181	148	41	60
	ERST20D-***D	A++	A+	6.0	133	148	41	60	A+++	A+	6.6	187	148	41	60
	EHSD-***D	A++	–	6.0	130	–	41	60	A+++	–	6.6	181	–	41	60
	ERSD-***D	A++	–	6.0	133	–	41	60	A+++	–	6.6	187	–	41	60
SUZ-SWM80VA	EHST17D-***D	A++	A+	7.1	131	144	41	62	A+++	A+	7.1	182	144	41	62
	ERST17D-***D	A++	A+	7.1	133	144	41	62	A+++	A+	7.1	187	144	41	62
	EHST20D-***D	A++	A+	7.1	131	148	41	62	A+++	A+	7.1	182	148	41	62
	ERST20D-***D	A++	A+	7.1	133	148	41	62	A+++	A+	7.1	187	148	41	62
	EHST30D-***D	A++	A+	7.1	131	127	41	62	A+++	A+	7.1	182	127	41	62
	ERST30D-***D	A++	A+	7.1	133	127	41	62	A+++	A+	7.1	187	127	41	62
	EHSD-***D	A++	–	7.1	131	–	41	62	A+++	–	7.1	182	–	41	62
	ERSD-***D	A++	–	7.1	133	–	41	62	A+++	–	7.1	187	–	41	62
PUD-SWM60VAA	E*ST17D-***D	A++	A+	6.0	130	136	41	55	A+++	A+	6.0	175	136	41	55
	E*ST20D-***D	A++	A+	6.0	130	148	41	55	A+++	A+	6.0	175	148	41	55
	E*ST30D-***D	A++	A	6.0	130	121	41	55	A+++	A	6.0	175	121	41	55
	E*SD-***D	A++	–	6.0	130	–	41	55	A+++	–	6.0	175	–	41	55
PUD-SWM80V/YAA	E*ST17D-***D	A++	A+	8.0	131/130	136	41	56	A+++	A+	8.0	178/176	136	41	56
	E*ST20D-***D	A++	A+	8.0	131/130	148	41	56	A+++	A+	8.0	178/176	148	41	56
	E*ST30D-***D	A++	A	8.0	131/130	121	41	56	A+++	A	8.0	178/176	121	41	56
	E*SD-***D	A++	–	8.0	131/130	–	41	56	A+++	–	8.0	178/176	–	41	56
PUD-SWM100V/YAA	E*ST20D-***D	A++	A+	10.0	131/130	148	41	59	A+++	A+	10.0	178/177	148	41	59
	E*ST30D-***D	A++	A	10.0	131/130	121	41	59	A+++	A	10.0	178/177	121	41	59
	E*SD-***D	A++	–	10.0	131/130	–	41	59	A+++	–	10.0	178/177	–	41	59
PUD-SWM120V/YAA	E*ST20D-***D	A++	A+	12.0	129/128	148	41	60	A+++	A+	12.0	177/176	148	41	60
	E*ST30D-***D	A++	A	12.0	129/128	121	41	60	A+++	A	12.0	177/176	121	41	60
	E*SD-***D	A++	–	12.0	129/128	–	41	60	A+++	–	12.0	177/176	–	41	60
PUD-SHWM60VAA	E*ST17D-***D	A++	A+	6.0	134	136	41	55	A+++	A+	6.0	178	136	41	55
	E*ST20D-***D	A++	A+	6.0	134	148	41	55	A+++	A+	6.0	178	148	41	55
	E*ST30D-***D	A++	A	6.0	134	121	41	55	A+++	A	6.0	178	121	41	55
	E*SD-***D	A++	–	6.0	134	–	41	55	A+++	–	6.0	178	–	41	55
PUD-SHWM80V/YAA	E*ST17D-***D	A++	A+	8.0	135/134	136	41	56	A+++	A+	8.0	181/179	136	41	56
	E*ST20D-***D	A++	A+	8.0	135/134	148	41	56	A+++	A+	8.0	181/179	148	41	56
	E*ST30D-***D	A++	A	8.0	135/134	121	41	56	A+++	A	8.0	181/179	121	41	56
	E*SD-***D	A++	–	8.0	135/134	–	41	56	A+++	–	8.0	181/179	–	41	56

Note: E**T17/20*-***D use "Load profile L".
E**T30*-***D use "Load profile XL".

All A++ or Above!!

Outdoor unit	Indoor unit	For medium-temperature application							For low-temperature application						
		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor
				kW	%	%	dB	dB			kW	%	%	dB	dB
PUD-SHWM100V/YAA	E*ST20D-***D	A++	A+	10.0	136/135	148	41	59	A+++	A+	10.0	180/178	148	41	59
	E*ST30D-***D	A++	A	10.0	136/135	121	41	59	A+++	A	10.0	180/178	121	41	59
	E*SD-***D	A++	–	10.0	136/135	–	41	59	A+++	–	10.0	180/178	–	41	59
PUD-SHWM120V/YAA	E*ST20D-***D	A++	A+	12.0	135/134	148	41	60	A+++	A+	12.0	179/177	148	41	60
	E*ST30D-***D	A++	A	12.0	135/134	121	41	60	A+++	A	12.0	179/177	121	41	60
	E*SD-***D	A++	–	12.0	135/134	–	41	60	A+++	–	12.0	179/177	–	41	60
PUD-SHWM140V/YAA	E*ST20D-***D	A++	A+	14.0	134/134	145	41	62	A+++	A+	14.0	179/177	145	41	62
	E*ST30D-***D	A++	A	14.0	134/134	121	41	62	A+++	A	14.0	179/177	121	41	62
	E*SD-***D	A++	–	14.0	134/134	–	41	62	A+++	–	14.0	179/177	–	41	62
PUHZ-SW75V/YAA	EHST17D-***D	A++	A+	7.1	129	136	41	58	A++	A+	7.2	162	136	41	58
	ERST17D-***D	A++	A+	7.1	132	136	41	58	A++	A+	7.2	166	136	41	58
	EHST20D-***D	A++	A+	7.1	129	145	41	58	A++	A+	7.2	162	145	41	58
	ERST20D-***D	A++	A+	7.1	132	145	41	58	A++	A+	7.2	166	145	41	58
	EHST30D-***D	A++	A	7.1	129	120	41	58	A++	A	7.2	162	120	41	58
	ERST30D-***D	A++	A	7.1	132	120	41	58	A++	A	7.2	166	120	41	58
	EHSD-***D	A++	–	7.1	129	–	41	58	A++	–	7.2	162	–	41	58
	ERSD-***D	A++	–	7.1	132	–	41	58	A++	–	7.2	166	–	41	58
PUHZ-SW100V/YAA	EHST20C-***D	A++	A+	10.0	130	145	40	60	A++	A+	10.6	167	145	40	60
	ERST20C-***D	A++	A+	10.0	132	145	40	60	A++	A+	10.6	170	145	40	60
	EHST30C-***D	A++	A	10.0	130	120	40	60	A++	A	10.6	167	120	40	60
	ERST30C-***D	A++	A	10.0	132	120	40	60	A++	A	10.6	170	120	40	60
	EHSC-***D	A++	–	10.0	130	–	40	60	A++	–	10.6	167	–	40	60
	ERSC-***D	A++	–	10.0	132	–	40	60	A++	–	10.6	170	–	40	60
PUHZ-SW120V/YHA	EHST20C-***D	A++	A+	12.0	125	138	40	72	A++	A+	12.9	162	138	40	72
	ERST20C-***D	A++	A+	12.0	127	138	40	72	A++	A+	12.9	164	138	40	72
	EHST30C-***D	A++	A	12.0	125	118	40	72	A++	A	12.9	162	118	40	72
	ERST30C-***D	A++	A	12.0	127	118	40	72	A++	A	12.9	164	118	40	72
	EHSC-***D	A++	–	12.0	125	–	40	72	A++	–	12.9	162	–	40	72
	ERSC-***D	A++	–	12.0	127	–	40	72	A++	–	12.9	164	–	40	72
PUHZ-SW160YKA	EHSE-***D	A++	–	13.5	125	–	45	78	A++	–	15.3	161	–	45	78
	ERSE-***D	A++	–	13.5	126	–	45	78	A++	–	15.3	163	–	45	78
PUHZ-SW200YKA	EHSE-***D	A++	–	15.5	127	–	45	78	A++	–	17.3	163	–	45	78
	ERSE-***D	A++	–	15.5	129	–	45	78	A++	–	17.3	164	–	45	78
PUHZ-SHW80V/YAA	EHST20C-***D	A++	A+	9.0	133	145	40	59	A++	A+	9.6	169	145	40	59
	ERST20C-***D	A++	A+	9.0	135	145	40	59	A++	A+	9.6	172	145	40	59
	EHST30C-***D	A++	A	9.0	133	120	40	59	A++	A	9.6	169	120	40	59
	ERST30C-***D	A++	A	9.0	135	120	40	59	A++	A	9.6	172	120	40	59
	EHSC-***D	A++	–	9.0	133	–	40	59	A++	–	9.6	169	–	40	59
	ERSC-***D	A++	–	9.0	135	–	40	59	A++	–	9.6	172	–	40	59
PUHZ-SHW112V/YAA	EHST20C-***D	A++	A+	12.7	135	145	40	60	A++	A+	13.9	171	145	40	60
	ERST20C-***D	A++	A+	12.7	137	145	40	60	A++	A+	13.9	173	145	40	60
	EHST30C-***D	A++	A	12.7	135	120	40	60	A++	A	13.9	171	120	40	60
	ERST30C-***D	A++	A	12.7	137	120	40	60	A++	A	13.9	173	120	40	60
	EHSC-***D	A++	–	12.7	135	–	40	60	A++	–	13.9	171	–	40	60
	ERSC-***D	A++	–	12.7	137	–	40	60	A++	–	13.9	173	–	40	60

Outdoor unit	Indoor unit	For medium-temperature application							For low-temperature application						
		Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level LWA indoor	Sound power level LWA outdoor
				kW	%	%	dB	dB			kW	%	%	dB	dB
PUHZ-SHW140YHA	EHST20C-***D	A++	A+	15.8	127	138	40	70	A++	A+	17.0	163	138	40	70
	ERST20C-***D	A++	A+	15.8	128	138	40	70	A++	A+	17.0	165	138	40	70
	EHST30C-***D	A++	A+	15.8	127	118	40	70	A++	A+	17.0	163	118	40	70
	ERST30C-***D	A++	A+	15.8	128	118	40	70	A++	A+	17.0	165	118	40	70
	EHSC-***D	A++	–	15.8	127	–	40	70	A++	–	17.0	163	–	40	70
	ERSC-***D	A++	–	15.8	128	–	40	70	A++	–	17.0	165	–	40	70
PUHZ-SHW230YKA2	EHSE-***D	A++	–	23.0	127	–	45	75	A++	–	25.0	164	–	45	75
	ERSE-***D	A++	–	23.0	128	–	45	75	A++	–	25.0	165	–	45	75
PUZ-WM50VHA	EHPT17X-***D	A++	A+	5.0	129	148	40	61	A+++	A+	5.0	183	148	40	61
	ERPT17X-***D	A++	A+	5.0	133	148	40	61	A+++	A+	5.0	190	148	40	61
	EHPT20X-***D	A++	A+	5.0	129	135	40	61	A+++	A+	5.0	183	135	40	61
	ERPT20X-***D	A++	A+	5.0	133	135	40	61	A+++	A+	5.0	190	135	40	61
	EHPX-***D	A++	–	5.0	129	–	40	61	A+++	–	6.0	190	–	40	61
PUZ-WM60VAA	EHPT17X-***D	A++	A+	6.0	142	144	40	58	A+++	A+	6.0	190	144	40	58
	ERPT17X-***D	A++	A+	6.0	145	144	40	58	A+++	A+	6.0	197	144	40	58
	EHPT20X-***D	A++	A+	6.0	142	145	40	58	A+++	A+	6.0	190	145	40	58
	ERPT20X-***D	A++	A+	6.0	145	145	40	58	A+++	A+	6.0	197	145	40	58
	EHPX-***D	A++	–	6.0	142	–	40	58	A+++	–	6.0	190	–	40	58
PUZ-WM85V/YAA	EHPT17X-***D	A++	A+	8.5	139/138	144	40	58	A+++	A+	8.5	193/190	144	40	58
	ERPT17X-***D	A++	A+	8.5	141	144	40	58	A+++	A+	8.5	197	144	40	58
	EHPT20X-***D	A++	A+	8.5	139/138	145	40	58	A+++	A+	8.5	193/190	145	40	58
	ERPT20X-***D	A++	A+	8.5	141	145	40	58	A+++	A+	8.5	197	145	40	58
	EHPT30X-***D	A++	A	8.5	139/138	120	40	58	A+++	A	8.5	193/190	120	40	58
	ERPT30X-***D	A++	A	8.6	141	120	40	58	A+++	A	8.5	197	120	40	58
	EHPX-***D	A++	–	8.5	139/138	–	40	58	A+++	–	8.5	193/190	–	40	58
PUZ-WM112V/YAA	EHPT20X-***D	A++	A+	10.0	134/133	148	40	60	A+++	A+	10.0	191/189	148	40	60
	ERPT20X-***D	A++	A+	10.0	136	148	40	60	A+++	A+	10.0	195	148	40	60
	EHPT30X-***D	A++	A	10.0	134/133	120	40	60	A+++	A	10.0	191/189	120	40	60
	ERPT30X-***D	A++	A	10.0	136	120	40	60	A+++	A	10.0	195	120	40	60
	EHPX-***D	A++	–	10.0	134/133	–	40	60	A+++	–	10.0	191/189	–	40	60
PUHZ-FRP71VHA2	EHST20C-***D	A+	A+	7.5	121	138	40	68	A++	A+	7.5	163	138	40	68
	EHSC-***D	A+	–	7.5	121	–	40	68	A++	–	7.5	163	–	40	68
PUMY-P112VKM3/YKM(E)4	EHST20C-***D	A+	A	11.2	121	106	40	69	A++	A	11.2	168	106	40	69
	EHSC-***D	A+	–	11.2	121	–	40	69	A++	–	11.2	168	–	40	69
PUMY-P125VKM3/YKM(E)4	EHST20C-***D	A+	A	11.2	121	106	40	69	A++	A	11.2	168	106	40	69
	EHSC-***D	A+	–	11.2	121	–	40	69	A++	–	11.2	168	–	40	69
PUMY-P140VKM3/YKM(E)4	EHST20C-***D	A+	A	11.2	121	106	40	69	A++	A	11.2	168	106	40	69
	EHSC-***D	A+	–	11.2	121	–	40	69	A++	–	11.2	168	–	40	69

Note: E**T17/20*-***D use "Load profile L".
E**T30*-***D use "Load profile XL".

NEW ECODESIGN DIRECTIVE

WHAT IS THE ErP DIRECTIVE?

The Ecodesign Directive for Energy-related Products (ErP Directive) establishes a framework to set mandatory standards for ErPs sold in the European Union (EU). The ErP directive introduces new energy-efficiency ratings across various product categories and affects how products such as computers, vacuum cleaners, boilers and even windows are classified in terms of environmental performance.

Regulations that apply to air conditioning systems of rated capacity up to 12kW came into effect as of January 1, 2013. Based on the use of future-orientated technologies, Mitsubishi Electric is one step ahead of these changes, with our air conditioning systems already achieving compliance with these new regulations.


NEW ENERGY LABEL AND MEASUREMENTS

Under regulation 2011/626/EU, supplementing directive 2010/30/EU, air conditioning systems are newly classified into energy-efficiency classes on the basis of a new energy labelling system, which includes three new classes: A⁺, A⁺⁺ and A⁺⁺⁺.

Revisions to the measurement points and calculations of the seasonal energy efficiency ratio (SEER) and seasonal coefficient of performance (SCOP) has resulted in changes to how air conditioning systems are classified into energy-efficiency classes.


Specifically, for cooling mode, air conditioning systems must achieve at least class B. For heating mode, air conditioning systems must achieve at least a SCOP value of 3.8.

■ New Energy Efficiency Label

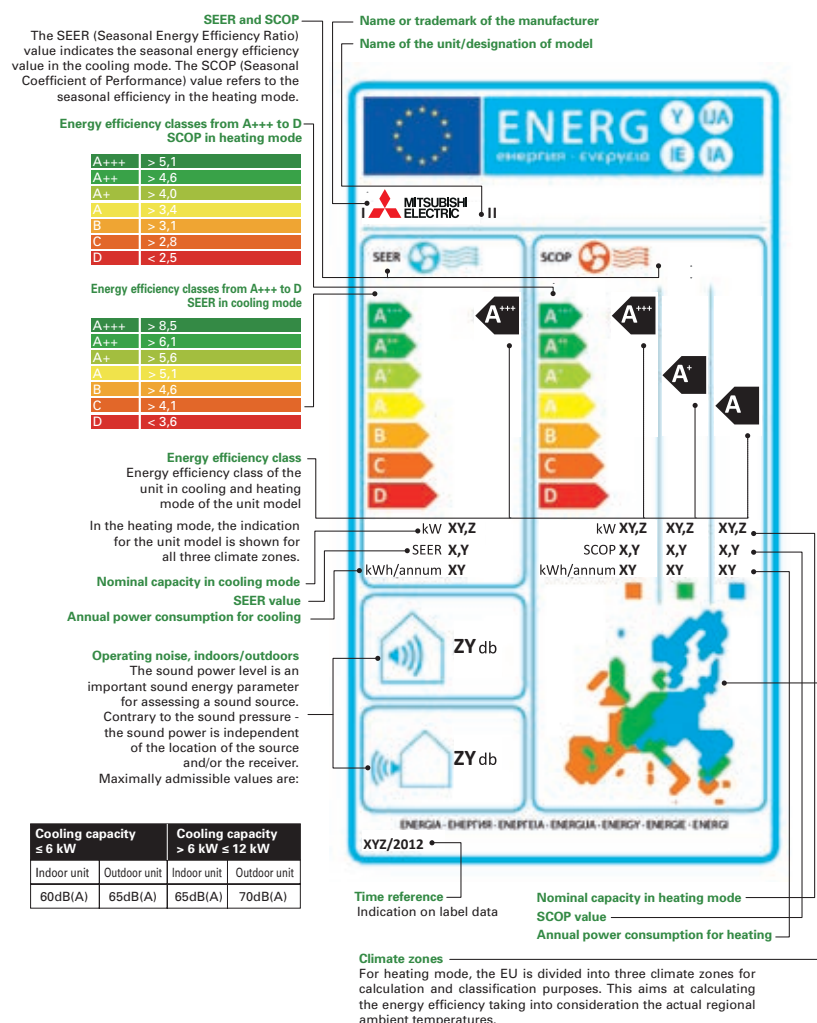

■ Climate Zones for Heating Mode

Reference climate zones for calculating the SCOP
Since the climate conditions have a great influence on the operating behaviour in the heat pump mode, three climate zones have been stipulated for the EU: warm, moderate, cold. The measurement points are homogenous at 12°C, 7°C, 2°C and -7°C.

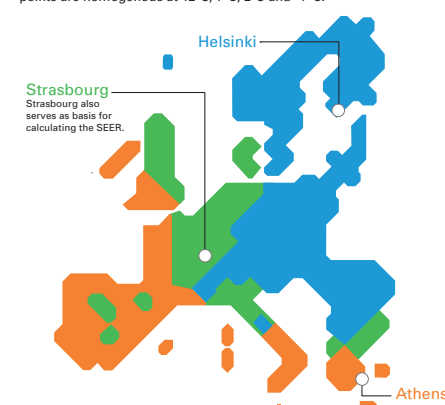

Warm (Athens)				
Partial load	Temperature conditions			Indoors
	Outdoors		WB	
	DB	WB	DB	DB
100%	2°C	1°C		20°C
64%	7°C	6°C		20°C
29%	12°C	11°C		20°C


Moderate (Strasbourg)				
Partial load	Temperature conditions			Indoors
	Outdoors		WB	
	DB	WB	DB	DB
88%	-7°C	-8°C		20°C
54%	2°C	1°C		20°C
35%	7°C	6°C		20°C
15%	12°C	11°C		20°C

Cold (Helsinki)				
Partial load	Temperature conditions			Indoors
	Outdoors		WB	
	DB	WB	DB	DB
61%	-7°C	-8°C		20°C
37%	2°C	1°C		20°C
24%	7°C	6°C		20°C
11%	12°C	11°C		20°C

SEER/SCOP

Air conditioning systems were previously assessed using the energy-efficiency rating (EER), which evaluated efficiency in cooling mode, and the coefficient of performance (COP), which defined the efficiency, or the ratio of consumed and output power, in heating mode. Under this system, assessments were not truly reflective of performance as they were based on a single measurement point, which led to manufacturers optimising products accordingly in order to achieve higher efficiency ratings. SEER and SCOP address this problem by including seasonal variation in the ratings via use of realistic measurement points. For cooling mode, measurements at outside temperatures of 20, 25, 30 and 35°C are incorporated and weighted in accordance with climate data for Strasbourg, which is used as a single reference point for the whole EU. For instance, for partial-load operation, which represents more than 90% of operation, there is a correspondingly high weighting for the efficiency classification. For heating mode, a comprehensive temperature profile for the whole EU was not possible, so the EU has been divided into three climate zones, north, central and south, and load profiles created. The same measurement points, at outside temperatures of 12, 7, 2 and -7°C, are used for all three zones.

■ SCOP Calculation

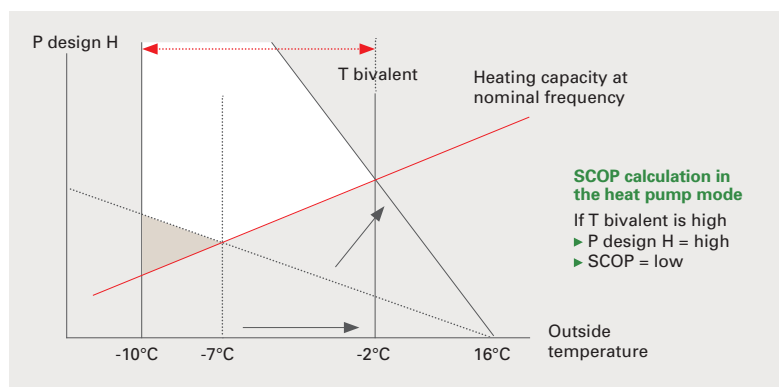

Technical Terms with Respect to the SCOP

P design H: Corresponds to a heating load of 100%. The value depends on the selected bivalence point.


T design: Outside temperature which determines the P design H point. The latter is determined from the area conditions.

T bivalent: Corresponds to the lowest temperature at which full heating performance can be achieved with the heat pump (without additional heating). This point can be freely selected within the prescribed temperature ranges (T design - T bivalent).

SOUND PRESSURE LEVEL

Consumers will also receive more information on the noise levels emitted by split-system air conditioners to help them make their purchasing decision. Specifically, the sound power level of indoor and outdoor units is to be indicated in decibels as an objective parameter. Knowing the sound power makes it possible to calculate sound emissions while considering distance and radiation characteristics, which is beneficial because it allows the noise levels of different air conditioning systems to be compared regardless of the usage location and how the sound pressure is measured. This is an improvement on sound pressure values which are usually measured at an approximate distance of 1m where all modern split-system air conditioning systems tend to be very quiet at an average of 21 decibels.

■ Sound Pressure vs Sound Power Level

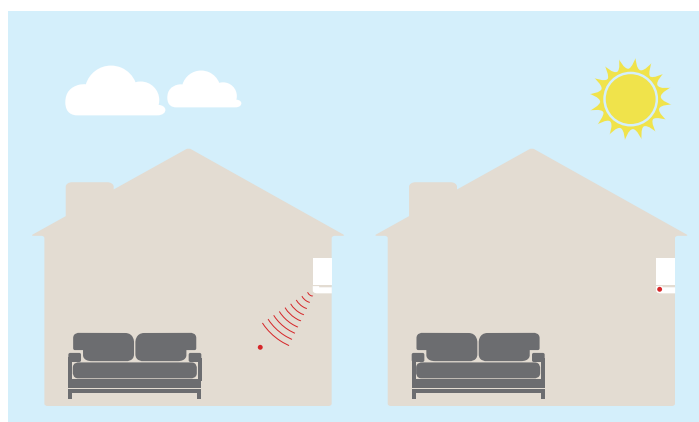

Sound pressure level dB(A)

The sound pressure level is a sound field parameter which indicates the perceived operating noise of an indoor unit within a certain distance.

Sound power level dB(A)

The sound power is an acoustic parameter which describes the source strength of a sound generator and is thus independent of the distance to the receiver location.



INVERTER TECHNOLOGIES

Mitsubishi Electric inverters ensure superior performance including the optimum control of operation frequency. As a result, optimum power is applied in all heating/cooling ranges and maximum comfort is achieved while consuming minimal energy. Fast, comfortable operation and amazingly low running cost — That's the Mitsubishi Electric promise.

INVERTERS — HOW THEY WORK

Inverters electronically control the electrical voltage, current and frequency of electrical devices such as the compressor motor in an air conditioner. They receive information from sensors monitoring operating conditions, and adjust the revolution speed of the compressor, which directly regulates air conditioner output. Optimum control of operation frequency results in eliminating the consumption of excessive electricity and providing the most comfortable room environment.


ECONOMIC OPERATION

Impressively low operating cost is a key advantage of inverter air conditioners. We've combined advanced inverter technologies with cutting-edge electronics and mechanical technologies to achieve a synergistic effect that enables improvements in heating/cooling performance efficiency. Better performance and lower energy consumption are the result.

TRUE COMFORT

Below is a simple comparison of air conditioner operation control with and without an inverter.

■ Inverter operation comparison

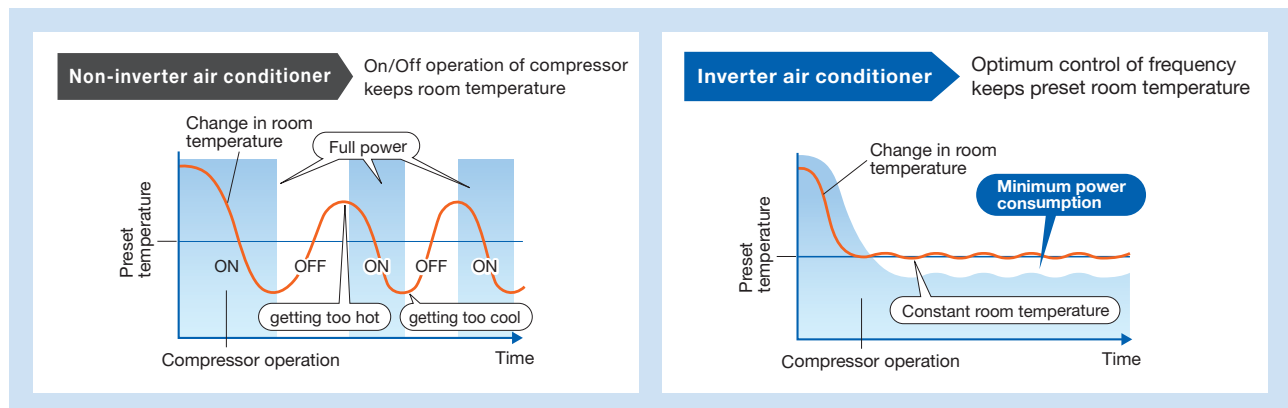

The compressors of air conditioners without an inverter start and stop repeatedly in order to maintain the preset room temperature. This repetitive on/off operation uses excessive electricity and compromises room comfort. The compressors of air conditioners equipped with an inverter run continuously; the inverter quickly optimizing the operating frequency according to changes in room temperature. This ensures energy-efficient operation and a more comfortable room.

Point 1 Quick & Powerful

Increasing the compressor motor speed by controlling the operation frequency ensures powerful output at start-up, brings the room temperature to the comfort zone faster than units not equipped with an inverter. Hot rooms are cooled, and cold rooms are heated faster and more efficiently.

Point 2 Room Temperature Maintained

The compressor motor operating frequency and the change of room temperature are monitored to calculate the most efficient waveform to maintain the room temperature in the comfort zone. This eliminates the large temperature swings common with non-inverter systems, and guarantees a pleasant, comfortable environment.

KEY TECHNOLOGIES

Our Rotary Compressor

Our rotary compressors use our original "Poki-Poki Motor" and "Heat Caulking Fixing Method" to realise downsizing and higher efficiency, and are designed to match various usage scenes in residential to commercial applications. Additionally, development of an innovative production method known as "Divisible Middle Plate" realises further size/weight reductions and increased capacity while also answering energy-efficiency needs.

Our Scroll Compressor

Our scroll compressors are equipped with an advanced frame compliance mechanism that allows self-adjustment of the position of the orbiting scroll according to pressure load and the accuracy of the fixed scroll position. This minimises gas leakage in the scroll compression chamber, maintains cooling capacity and reduces power loss.

MORE ADVANTAGES WITH MITSUBISHI ELECTRIC



Joint Lap DC Motor

Mitsubishi Electric has developed a unique motor, called the “Poki-Poki Motor” in Japan, which is manufactured using a joint lapping technique. This innovative motor operates based on a high-density, high-magnetic force, leading to extremely high efficiency and reliability.




Magnetic Flux Vector Sine Wave Drive

This drive device is actually a microprocessor that converts the compressor motor's electrical current waveform from a conventional waveform to a sine wave (180°conductance) to achieve higher efficiency by raising the motor winding utilisation ratio and reducing energy loss.




Reluctance DC Rotary Compressor

Powerful neodymium magnets are used in the rotor of the reluctance DC motor. More efficient operation is realised by strong magnetic and reluctance torques produced by the magnets.

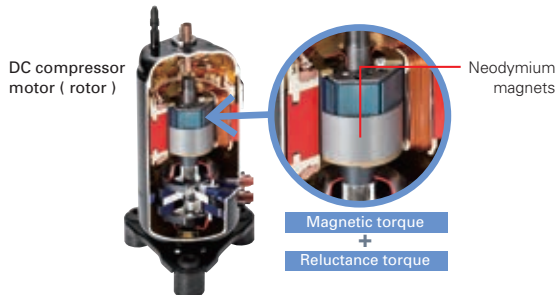


Highly Efficient DC Scroll Compressor

Higher efficiency has been achieved by adding a frame compliance mechanism to the DC scroll compressor. The mechanism allows movement in the axial direction of the frame supporting the cradle scroll, thereby greatly reducing leakage and friction loss, and ensuring extremely high efficiency at all speeds.

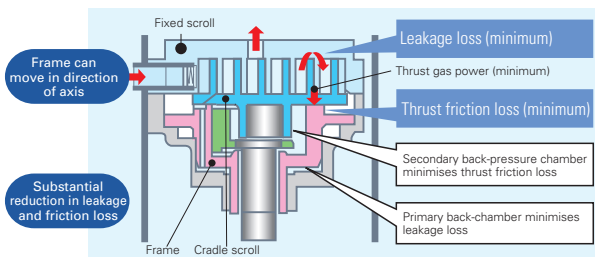

Heat Caulking Fixing Method

To fix internal parts in place, a “Heat Caulking Fixing Method” is used, replacing the former arc spot welding method. Distortion of internal parts is reduced, realising higher efficiency.



DC Fan Motor

A highly efficient DC motor drives the fan of the outdoor unit. Efficiency is much higher than an equivalent AC motor.




Vector-Wave Eco Inverter

This inverter monitors the varying compressor motor frequency and creates the most efficient waveform for the motor speed. As the result, operating efficiency in all speed ranges is improved, less power is used and annual electricity cost is reduced.


Smooth wave pattern

Inverter size has been reduced using insert-molding, where the circuit pattern is molded into the synthetic resin. To ensure quiet operation, soft PWM control is used to prevent the metallic whine associated with conventional inverters.



PAM (Pulse Amplitude Modulation)

PAM is a technology that controls the current waveform so that it resembles the supply voltage wave, thereby reducing loss and realising more efficient use of electricity. Using PAM control, 98% of the input power supply is used effectively.

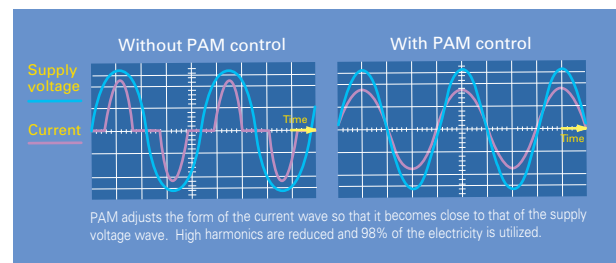

Merits of PAM Control

Significant energy savings
Remarkable reduction in power loss saves electricity

Limited energy savings
Electricity is wasted


Power increased
Efficient voltage increase realises increased power

Limited power
Insufficient power when needed




Power Receiver and Twin LEV Control

Mitsubishi Electric has developed a power receiver and twin linear expansion valves (LEVs) circuit that optimise compressor performance. This technology ensures optimum control in response to operating waveform and outdoor temperature. Operating efficiency has been enhanced by tailoring the system to the characteristics of R410A refrigerant.

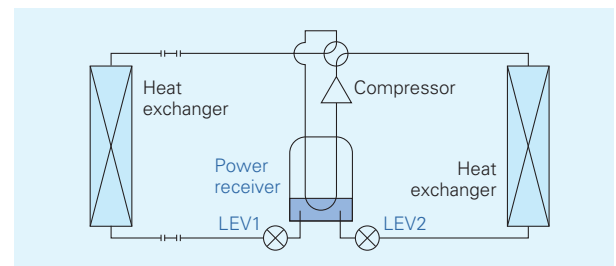

Grooved Piping

High-performance grooved piping is used in heat exchangers to increase the heat exchange area.




COMFORT

3D i-see Sensor


3D i-see Sensor for M SERIES

The LN Series and FH Series are equipped with the 3D i-see Sensor, an infrared-ray sensor that measures the temperature at distant positions. While moving to the left and right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. This detailed analysis makes it possible to judge where people are in the room, thus allowing creation of features such as "Indirect airflow," to avoid airflow hitting people directly, and "direct airflow" to deliver airflow to where people are.

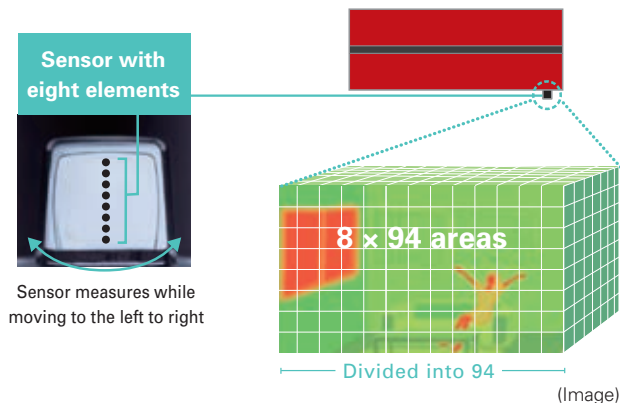

No occupancy energy-saving mode


The sensors detect whether there are people in the room. When no-one is in the room, the unit automatically switches to energy-saving mode.

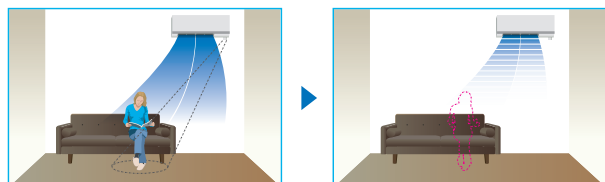

The "3D i-see Sensor" detects people's absence and the power consumption is automatically reduced approximately 10% after 10 minutes and 20% after 60 minutes.


Indirect Airflow

The indirect airflow setting can be used when the flow of air feels too strong or direct. For example, it can be used during cooling to avert airflow and prevent body temperature from becoming excessively cooled.




Direct Airflow

This setting can be used to directly target airflow at people such as for immediate comfort when coming indoors on a hot (cold) day.




Even Airflow *LN Series only

Normal swing mode



The airflow is distributed equally throughout the room, even to spaces where there is no human movement.



Even airflow mode



The 3D i-see sensor memorizes human movement and furniture positions, and efficiently distributes airflow.

No occupancy Auto-OFF mode *LN Series only

The sensors detect whether or not there are people in the room. When there is no one in the room, the unit turns off automatically.



3D i-see Sensor for S & P SERIES

Detects number of people


The 3D i-see Sensor detects the number of people in the room and adjusts the power accordingly. This makes automatic power-saving operation possible in places where the number of people changes frequently. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it can also stop the operation.

Detects people's position

Once a person is detected, the angle of the vane is automatically adjusted. Each vane can be independently set to "Direct Airflow" or "Indirect Airflow" according to taste.

Highly accurate people detection

A total of eight sensors rotate a full 360° in 3-minute intervals. In addition to detecting human body temperature, our original algorithm also detects people's positions and the number of people.

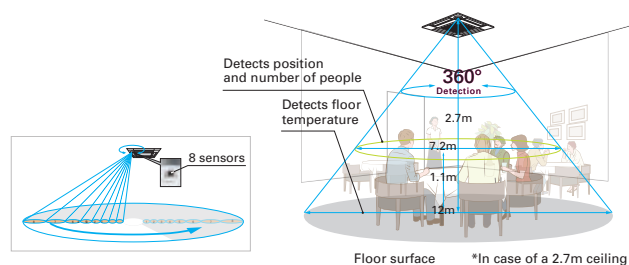

Detects number of people

Room occupancy energy-saving mode

The 3D i-see Sensor detects the number of people in the room. It then calculates the occupancy rate based on the maximum number of people in the room up to that point in time in order to save air-conditioning power. When the occupancy rate is approximately 30%, air-conditioning power equivalent to 1°C during both cooling and heating operation is saved. The temperature is controlled according to the number of people.

No occupancy energy-saving mode

When 3D i-see Sensor detects that no one is in the room, the system is switched to a pre-set power-saving mode. If the room remains unoccupied for more than 60min, air-conditioning power equivalent to 2°C during both cooling and heating operation is saved. This contributes to preventing waste in terms of heating and cooling.

No occupancy Auto-OFF mode*

When the room remains unoccupied for a pre-set period of time, the air conditioner turns off automatically, thereby providing even greater power savings. The time until operation is stopped can be set in intervals of 10min, ranging from 60 to 180 min.

*When MA Remote Controller is used to control multiple refrigerant systems, "No occupancy Auto-OFF mode" cannot be used.

Room occupancy energy save mode



100 %




30 %

1°C power savings

No occupancy energy save mode



100 %




0 %

2°C power savings

No occupancy Auto-OFF mode



100 %



0 %


Auto-Off

*PAR-40MAA is required for each setting

Detects people's position

Direct/Indirect settings*

The horizontal airflow spreads across the ceiling. When set to "Indirect Airflow" uncomfortable drafty-feeling is eliminated completely!

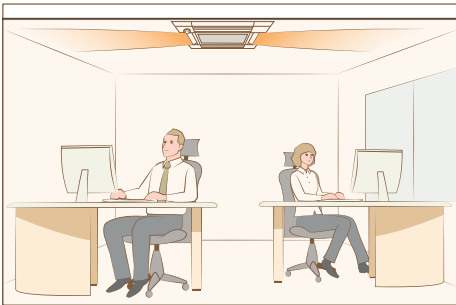

*PAR-40MAA or PAR-SL100A-E is required for each setting.


Seasonal airflow*

When cooling

Saves energy while keeping a comfortable effective temperature by automatically switching between ventilation and cooling. When a pre-set temperature is reached, the air conditioning unit switches to swing fan operation to maintain the effective temperature. This clever function contributes to keeping a comfortable coolness.

When heating


The air conditioning unit automatically switches between circulator and heating. Wasted heat that accumulates near the ceiling is reused via circulation. When a pre-set temperature is reached the air conditioner switches from heating to circulator and blows air in the horizontal direction. It pushes down the warm air that has gathered near the ceiling to people's height, thereby providing smart heating.

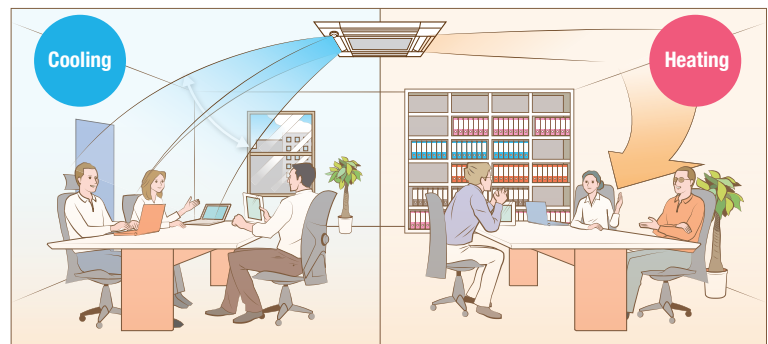


*PAR-40MAA is required for each setting.

Area Temperature Monitor

The "3D i-see Sensor" monitors the whole room in sections and directs the airflow to areas of the room where the temperature does not match the temperature setting. (When cooling the room, if the middle of the room is detected to be hotter, more airflow is directed towards it.) This eliminates unnecessary heating /cooling and contributes to lower electricity costs.



Cooling mode



COMFORT

ENERGY-SAVING



Econo Cool Energy-Saving Feature

"Econo Cool" is an intelligent temperature control feature that adjusts the amount of air directed towards the body based on the air-outlet temperature. The setting temperature can be raised by as much as 2°C without any loss in comfort, thereby realising a 20% gain in energy efficiency. *(Function only available during manual cooling operation.)*

	Conventional	Econo Cool
Ambient temperature	35°C	35°C
Set temperature	25°C	27°C
Perceived temperature	30°C	29.3°C

Econo Cool Mode

A comfortable room environment is maintained even when setting the temperature 2°C higher than the conventional cooling mode.

Econo Cool on



Conventional cooling mode



Temperature distribution (°C)



Demand Function (Onsite Adjustment)

The demand function can be activated when the unit is equipped with a commercially available timer or an On/Off switch is added to the CNDM connector (option) on the control board of the outdoor unit. Energy consumption can be reduced up to 100% of the normal consumption according to the signal input from outside.

[Example: Power Inverter Series]

Limit energy consumption by changing the settings of SW7-1, SW2 and SW3 on the control board of the outdoor unit. The following settings are possible.

SW7-1	SW2	SW3	Energy consumption
ON	OFF	OFF	100%
	ON	OFF	75%
	ON	ON	50%
	OFF	ON	0% (Stop)

*PUHZ outdoor only

AIR QUALITY



Plasma Quad Plus

Plasma Quad Plus is a plasma-based filter system similar to Plasma Quad, but in addition to bacteria, viruses, allergens, and dust, it can also filter out microparticles such as PM2.5.



Plasma Quad

Plasma Quad attacks bacteria and viruses from inside the unit using a strong curtain-like electrical field and discharge of electric current across the whole inlet-air opening of the unit.



Dual Barrier Coating

A two-barrier coating which prevents hydrophobic and hydrophilic dirt from sticking to the inner surface and inner parts of the indoor unit.



Fresh-air Intake

Indoor air quality is enhanced by the direct intake of fresh exterior air.



High-efficiency Filter

This high-performance filter has a much finer mesh compared to standard filters, and is capable of capturing minute particulates floating in the air that were not previously caught.



Air Purifying Filter

The filter has a large capture area and deodorise the circulating air.



Oil Mist Filter

The oil mist filter prevents oil mist from penetrating into the inner part of the air conditioner.



Long-life Filter

A special process for the entrapment surface improves the filtering effect, making the maintenance cycle longer than that of units equipped with conventional filters.



Filter Check Signal

Air conditioner operating time is monitored, and the user is notified when filter maintenance is necessary.



Silver-ionized Air Purifier Filter

Captures the bacteria, pollen and other allergens in the air and neutralises them.

AIR DISTRIBUTION



Double Vane

Double vane separates the airflow in the different directions to deliver airflow not only across a wide area of the room, but also simultaneously to two people in different locations.



Horizontal Vane

The air outlet vane swings up and down so that the airflow is spread evenly throughout the room.



Vertical Vane

The air outlet fin swings from side to side so that the airflow reaches every part of the room.



High Ceiling Mode

In the case of rooms with high ceilings, the outlet-air volume can be increased to ensure that air is circulated all the way to the floor.



Low Ceiling Mode

If the room has a low ceiling, the airflow volume can be reduced for less draft.



Auto Fan Speed Mode

The airflow speed mode adjusts the fan speed of the indoor unit automatically according to the present room conditions.


CONVENIENCE

CONVENIENCE

"i save" Mode

"i save" is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice in repetition to immediately return to the previous temperature setting.

Using this function contributes to comfortable waste-free operation, realising the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.

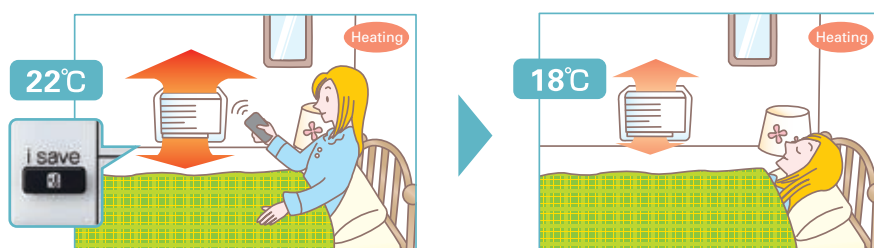

* Temperature can be preset to 10°C when heating in the "i-save" mode.



Auto Changeover

The air conditioner automatically switches between heating and cooling modes to maintain the desired temperature.

Auto Restart

Especially useful at the time of power outages, the unit turns back on automatically when power is restored.

Low-temperature Cooling

Intelligent fan speed control in the outdoor unit ensures optimum performance even when the outside temperature is low.

10°C Heating

During heating operation, the temperature can be set in 1°C increments down to 10°C.

Ampere Limit Adjustment

Dip switch settings can be used to adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs.

*Maximum capacity is lowered with the use of this function.


Operation Lock (Indoor unit)

To accommodate specific-use applications, cooling or heating operation can be specified using the wireless remote controller. A convenient option when a system needs to be configured for exclusive cooling or heating service.

Operation Lock (Outdoor unit)

To accommodate specific-use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. A convenient option when a system needs to be configured for exclusive cooling or heating service.

■ Dip Switch Setting (Board for MXZ-5E102)

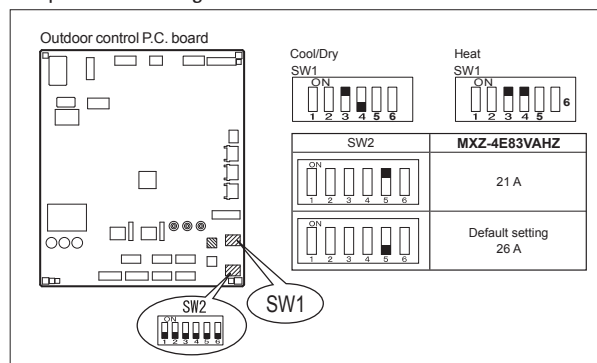

Night Mode

When Night Mode is activated using the wireless remote controller, it will switch to the settings described below.

- The brightness of the operation indicator lamp will become dimmer.
- The beeping sound will be disabled.
- The outdoor operating noise will drop to 3dB lower than the rated specification operating noise.

*The cooling/heating capacity may drop.

Low-noise Operation (Outdoor Unit)

System operation can be adjusted to prioritise less noise from the outdoor unit over air conditioning performance.

On/Off Operation Timer

Use the remote controller to set the times of turning the air conditioner On/Off.

Built-in Weekly Timer Function

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
6:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
8:00	Automatically changes to high-power operation at wake-up time						
10:00	OFF	OFF	OFF	OFF	OFF	ON 18°C	ON 18°C
12:00	Automatically turned off during work hours						Midday is warmer, so the temperature is set lower
14:00							
16:00							
18:00	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C	ON 22°C
20:00	Automatically turns on, synchronized with arrival at home						Automatically raises temperature setting to match time when outside-air temperature is low
22:00 (during sleeping hours)	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C
	Automatically lowers temperature at bedtime for energy-saving operation at night						

Settings

Pattern Settings: Input up to four settings for each day

Settings: •Start/Stop operation •Temperature setting *The operation mode cannot be set.


Easy set-up using dedicated buttons



The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.



How to set the Weekly Timer

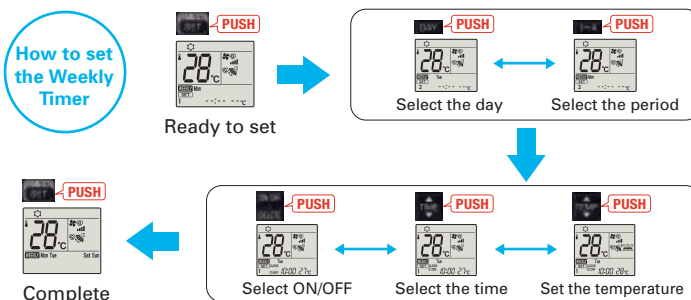

- Start by pushing the "SET" button and follow the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit).
- It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

Back Light Remote Controller

Not only the indoor units, but the wireless remote controllers come in four colours as well. Each remote controller matches the indoor unit. Even the textures are the same.



The setting can be easily checked in the dark.

INSTALLATION & MAINTENANCE

INSTALLATION



Cleaning-free Pipe Reuse

It is possible to reuse the same piping. It allows cleaning-free renewal of air conditioning systems that use R22 or R410 refrigerant.




Reuse of Existing Wiring

Wiring recycling problem solved! Compatible with other wiring connection methods*


The wiring method has been improved, making it possible to use methods different from that utilized for control and power supply. Units are compatible with the dual harness control line/power line method and the separate power supply method. Using a power supply terminal kit, wire can be efficiently reused at the time of system renewal regardless of the method the existing system uses.

* Optional. Usage may be limited due to wiring type diameter.


Single Harness Control/Power Line Method (Current method)

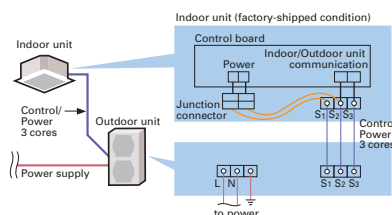

Dual Harness Control Line/Power Line Method

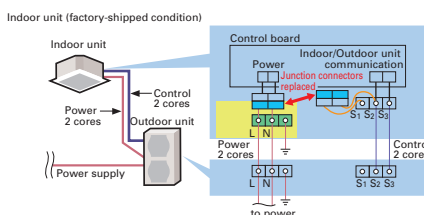


Separate Power Supply Method

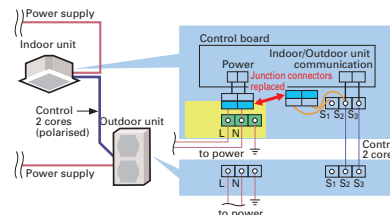

Wiring/Piping Correction Function*


The push of a single button is all that is required to confirm that piping and wiring are properly connected. Corrections are made automatically if a wiring error is detected, eliminating the need for complicated wiring confirmation work when expanding the number of rooms served.

* This function cannot be used when the outdoor temperature is below 0°C. The correction process requires 10–20 minutes, and only works when the unit is set to the Cooling mode.

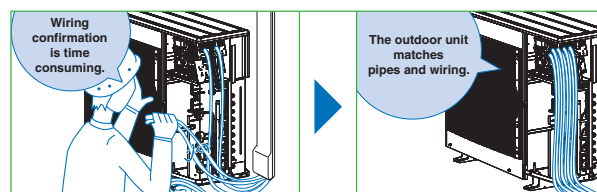

Drain Pump

A built-in drain pump enables drain piping to be raised.

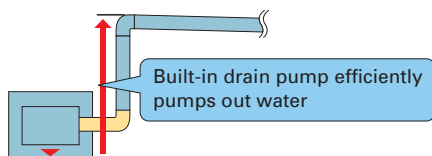

Flare Connection

Flare connection to cooling pipe work is possible.



Pump Down Switch

Enables smooth and easy recovery of refrigerant. Simply press the "Pump Down" switch before moving or changing the unit.

Outdoor unit control circuit board



* Photo of Model PUHZ-P100

Pump Down Switch



Pump down switch

Push this switch to start/stop refrigerant recovery operation automatically. (Valve in refrigerant circuit is opened/closed.)

MAINTENANCE



Self-Diagnostic Function (Check Code Display)

Check codes are displayed on the remote controller or the operation indicator to inform the user of malfunctions detected.



Failure Recall Function

Operation failures are recorded, allowing confirmation when needed.

SYSTEM CONTROL

SYSTEM CONTROL



PAR-40MAA/PAC-YT52CRA/PAC-CT01MAA

Units are compatible for use with the PAR-40MAA, PAC-YT52CRA or PAC-CT01MAA remote controller, which has a variety of management functions.



System Group Control

The same remote controller is capable of controlling the operational status of up to 16 refrigerant systems.



M-NET Connection

Units can be connected to MELANS system controllers (M-NET controllers) such as the AG-150A.



MELCloud (Wi-Fi interface)

MELCloud for fast, easy remote control and monitoring

MELCloud is a Cloud-based solution for controlling air-conditioner either locally or remotely by computer, tablet or smartphone via the Internet. Setting up and remotely operating via MELCloud is simple and straight forward. All you need is wireless computer connectivity in your home or the building where the air-conditioner is installed and an Internet connection on your mobile or fixed terminal. To set up the system, the router and the Wi-Fi interface must be paired, and this is done simply and quickly using the WPS button found on all mainstream routers.

You can control and check air-conditioner via MELCloud from virtually anywhere an Internet connection is available.

That means, thanks to MELCloud, you can use much more easily and conveniently.

Key control and monitoring features

- 1 Turn system on/off
- 2 See status of operating & adjust set point
- 3 Live weather feed from your location
Schedule timer - Set 7 day weekly schedule
Error status
- 4 Energy Consumption Monitoring



MELCloud™



MELCloud uses the MAC-567IF-E interface

Connecting the Wi-Fi interface


The new Wi-Fi interface MAC-567IF-E can be mounted on the wall or on the outer side of the indoor unit. For LN Series, there is a built-in Wi-Fi interface inside the indoor unit.

When mounting on the wall

The interface can be mounted simply by affixing the holder to the wall on either side of the unit and inserting the interface unit into the holder.




*When mounting on the right side of the unit

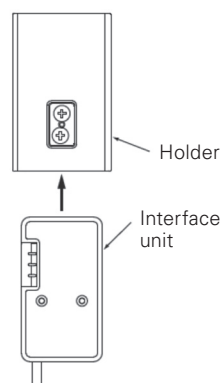

When mounting on the outer side of the unit

The interface can be mounted on the right side, left side, bottom right, or bottom left of the indoor unit. After inserting the clip into the holder, slip the clip over the edge of the corner box.

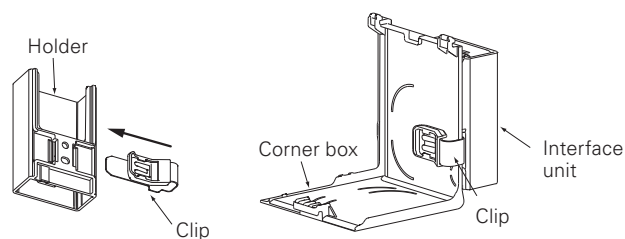

Right side



Bottom right



Left side



Bottom left

CONTROL TECHNOLOGIES

User-friendly Deluxe Remote Controller with Excellent Operability and Visibility



PAR-40MAA

Easy To Read & Easy To Use Inverted display screen

The screen background color can be set to black to suit the atmosphere of the installation location.



Full Dot Liquid-crystal Display Adopted

Easier to read thanks to use of a full dot liquid-crystal display with backlight, and easier to use owing to adopting a menu format that has reduced the number of operating buttons.

Display Example [Operation Mode]

Full Dot LCD



Multi-language Display

Multi-language

Control panel operation in fourteen different languages

Choose the desired language, among the following languages.

English	Spanish	Italian	Turkish
French	Greek	Portuguese	Swedish
German	Russian	Polish	Czech
Hangarian	Dutch		

Temperature Control


Dual Set Point

Two preset temperatures

When the operation mode is set to the Auto (Dual Set Point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, indoor unit will automatically operate in either the COOL or HEAT mode and keep the room temperature within the preset range.



Operation pattern during Auto (Dual Set Point) mode

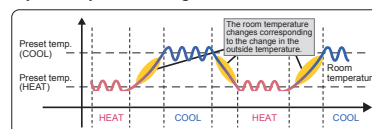

*Please refer to the function list on pages 193-200 for the combination of the available units.

Energy-efficient Control

Operation Control Functions

Energy-saving Schedule

Precise control of power consumption

The amount of power consumed in each time period is managed so that the demand value is not exceeded. The demand control function can be set to start and finish in 5-minute units.

Additionally, the level can be adjusted to 0, 50, 60, 70, 80 or 90% of maximum capacity, and up to 4 patterns can be set per day. Air-conditioning operation is automatically controlled to ensure that electricity in excess of the contracted volume is not consumed.

Setting pattern example

Start time	Finish time	Capacity savings
8:15 → 12:00		80%
12:00 → 13:00		50%
13:00 → 17:00		90%
17:00 → 21:00		50%

Auto-return

Prevents wasteful operation by automatically returning to the preset temperature after specified operating time

After adjusting the temperature for initial heating in winter or cooling on a hot summer day, it is easy to forget to return the temperature setting to its original value. The Auto-return function automatically resets the temperature back to the original setting after a specified period of time, thereby preventing overheating/overcooling. The Auto-return activation time can be set in 10-minute units, in a range between 30 and 120 minutes.

*Auto-return cannot be used when Temperature Range Restrictions is in use.

Auto-off Timer

Turns heating/cooling off automatically after preset time elapses

When using Auto-off Timer, even if one forgets to turn off the unit, operation stops automatically after the preset time elapses, thereby preventing wasteful operation. Auto-off Timer can be set in 10-minute units, in a range between 30 minutes and 4 hours. Eliminates all anxiety about forgetting to turn off the unit.

Recommended for **Meeting room** **Changing room**

Night Setback

Keep desired room temperatures automatically

This function monitors the room temperature and automatically activates the heating mode when the temperature drops below the preset minimal temperature setting. It has the same function for cooling, automatically activating the cooling mode when the temperature rises above the preset maximum temperature setting.

Operation Lock

Fixed temperature setting promotes energy savings

In addition to operation start/stop, the operation mode, temperature setting and airflow direction can be locked. Unwanted adjustment of temperature settings is prevented and an appropriate temperature is constantly maintained, leading to energy savings. This feature is also useful in preventing erroneous operation or tampering.

Recommended for **Office** **School** **Public hall**
Hospital **Computer server facility**

Temperature Range Restriction


Temperature Range Restriction prevents overheating/overcooling

Using a temperature that is 1°C lower/higher for heating/cooling results in a 10% reduction in power consumption.* Temperature Range Restriction limits the maximum and minimum temperature settings, contributing to the prevention of overheating/overcooling.

*In-house calculations

Cooling/Dry

(Setting example of minimum temp. in 25°C)

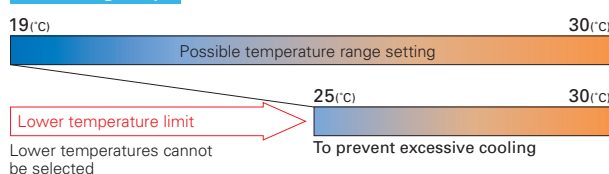

Recommended for **Office** **Restaurant**


Weekly Timer

Weekly Timer with Two Types of Settings

Weekly schedule timer can save two different settings which can be easily switched according to different seasons. In addition, it offers eight different pattern setting per day. (on, off and temperature setting)

*Weekly Timer cannot be used when On/Off Timer is in use.

Setting Example (restaurant in summer time)

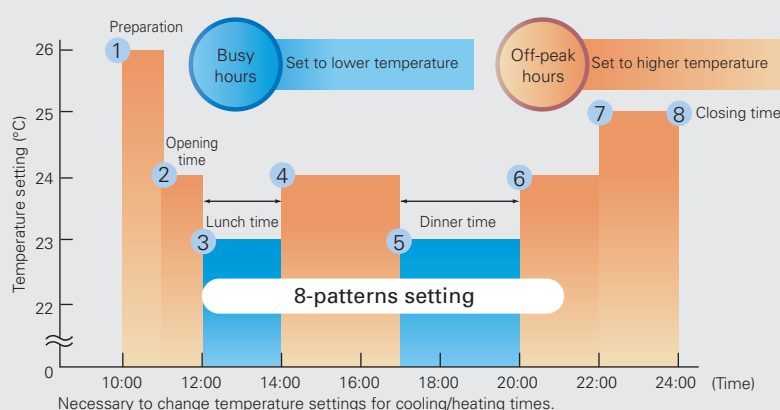

CONTROL TECHNOLOGIES

Installation/Maintenance Support Functions

Smooth Maintenance

Outdoor unit data accessed immediately, enabling fast maintenance (only PUZ/PUHZ type)

Using the Stable Operation Control (fixed frequency) of the Smooth Maintenance function, the operating status of the inverter can be checked easily via the screen on the remote controller.

Smooth Maintenance Function Operating Procedure



Display information (11 items)


Compressor		⑥	OU TH4 temp. (°C)
①	COMP. current (A)	⑦	OU TH6 temp. (°C)
②	COMP. run time (Hr)	⑧	OU TH7 temp. (°C)
③	COMP. ON/OFF (times)	Indoor Unit	
④	COMP. frequency (Hz)	⑨	IU air temp. (°C)
Outdoor Unit		⑩	IU HEX temp. (°C)
⑤	Sub cool (°C)	⑪	IU filter operating time* (Hr)

*IU filter operating time is the time elapsed since filter was reset.

Inspection Guidelines

The computed temperature difference is plotted as in the graph below and operating status is determined.

		Item
Cooling	Temp. difference	(⑥ OU TH4 temp.) - (⑦ OU TH6 temp.)
		(⑨ IU air temp.) - (⑩ IU HEX temp.)
Heating		(⑥ OU TH4 temp.) - (⑩ IU HEX temp.)
		(⑩ IU HEX temp.) - (⑨ IU air temp.)

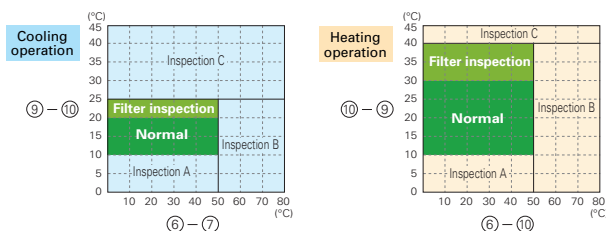

Result

Normal	Normal operating status.
Filter inspection	Filter may be blocked.*1
Inspection A	Capacity is reduced. Detailed inspection is necessary.
Inspection B	Refrigerant level is low.
Inspection C	Filter or indoor unit heat exchanger is blocked.

*1: Due to indoor and outdoor temperatures, "Filter inspection" may be displayed even if the filter is not blocked.

* The above graphs are based on trial data. Results may vary depending on installation/temperature conditions.

● Stable operation may not be possible under the following temperature conditions:

a) In cooling mode when the outdoor induction temperature is over 40°C or the indoor induction temperature is below 23°C.

b) In heating mode when the outdoor induction temperature is over 20°C or when the indoor induction temperature is over 25°C.

● If the above temperature conditions do not apply and stable operation is not achieved after 30 minutes has passed, please inspect the units.

● The operating status may change due to frost on the outdoor heat exchanger.

Manual Vane Angle Setting (4-way ceiling cassette)

Direction of vertical airflow for each vane can be set

Setting the vertical airflow direction for each individual vane can be performed simply via illustrated display. Seasonal settings such as switching between cooling and heating are easily changed as well.

Auto-descending Panel Operation

Easily raise/lower panels using the remote controller

Auto-descending panel operation is available as an option. Panels can be raise/lower using a button on the wired remote controller. Filter cleaning can be performed easily.

Silent Mode

Three outdoor noise level setting

The outdoor noise level can be reduced on demand according to the surrounding environment. Select from three setting mode: standard mode (rated), silent mode and ultra-silent mode.

Initial Password Setting

Password for initial settings

A password is required (default setting is "0000") for initial settings such as time and display language.

Rotation
Back-up

Rotation*, Back-up* and 2nd Stage Cut-in Functions* (PAR-40MAA)


(1) Rotation and Back-up Functions

Function Outline

- Main and sub units take turns operating according to a rotation interval setting.
- If one unit malfunctions, the other unit automatically begins operation (Back-up function)

*PUZ/PUHZ only

System Image



(2) 2nd Stage Cut-in Function

Function Outline



- Number of units operating is based on room temperature and predetermined settings.
- When room temperature rises above the desired setting, the standby unit starts (2-unit operation).
- When the room temperature falls 4°C below the predetermined setting, the standby unit stops (1-unit operation).

System Constraint


- This function is only available for rotation operation and when the back-up function is in cooling mode.

*PUZ/PUHZ only

Operation Pattern

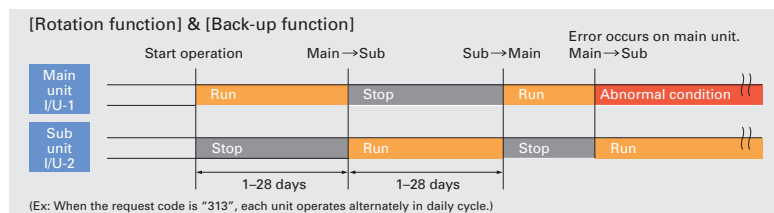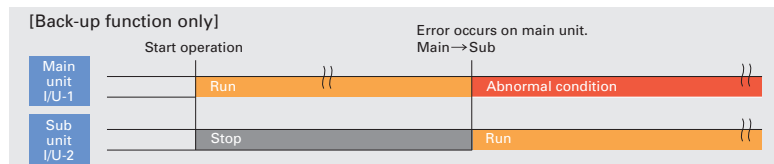

Operation Pattern

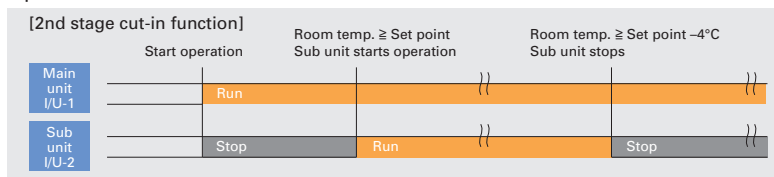

Simple MA Remote Controller PAC-YT52CRA

Backlit LCD


Features a liquid-crystal display (LCD) with backlight for operation in dark conditions.


Flat Back

The slim and flat-back shape makes installation easier without requiring a hole in the wall. Thickness is 14.5mm or less.

Vane Angle Setting

The vane button has been added to allow users to change the airflow direction (ceiling-cassette and wall-mounted units).

Pressing the  button will switch the vane direction.

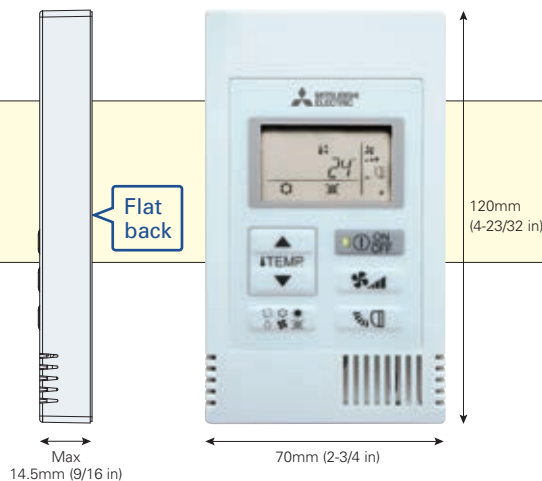


Dual Set Point

Two preset temperatures


When the operation mode is set to the Auto (Dual Set Point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, indoor unit will automatically operate in either the COOL or HEAT mode and keep the room temperature within the preset range.

Operation pattern during Auto (Dual Set Point) mode

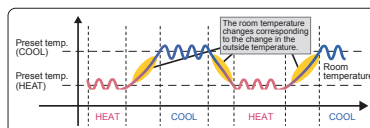

*Please refer to the function list on pages 193-200 for the combination of the available units.

* The settable vane directions vary depending on the indoor unit model to be connected.

* If the unit has no vane function, the vane direction cannot be set. In this case, the vane icon flashes when the  button is pressed.

CONTROL TECHNOLOGIES

MAT Touch Remote Controller
PAC-CT01MAA-SB
PAR-CT01MAA-PB



PAC-CT01MAA-SB



PAR-CT01MAA-PB

User-friendly Visible big size icons on the full color touch panel display.

Full color touch panel display



Touch Panel

3.5 inch/HVGA Full Color LCD



Operation panels



Temperature setting



Operation mode



Fan speed



Vane control



Ventilation



Louver control

Flexibility Customized display, color on parameter and background, editable parameter, logo image on the initial display.

Multiple color pattern

180 color patterns can be selected for control parameters or background on the display.

Control parameter customize

Users can customize the panel to display the selected parameters only.


● Control parameter customize

Simple operation panel is liked by users, especially in hotels. It is available to display only ON/OFF, set temp., fan speed.



Logo image customization

Logo image can be displayed on the initial screen.



Available in a wide variety of colors to suit the decor of any room.



Expandability Smartphone / tablet App is available for setting, customize, and control.

Bluetooth® low energy technology

Remote controller can communicate with smartphone or tablet device via Bluetooth Low Energy (BLE). Operation & Setting App are available on the App store.




*The Bluetooth® word mark is trademark of Bluetooth SIG, Inc., USA.
*Contact the sales company for information on "Bluetooth" function.



<App screen image>



User App




Setting App

Convenient BLE transmission functions for installation contractors

Initial setup for the remote controller can be easily performed using BLE transmission via a smartphone.

● Previous model

Previously, initial setup (selecting function parameters) was only available via the remote controller installed each room.

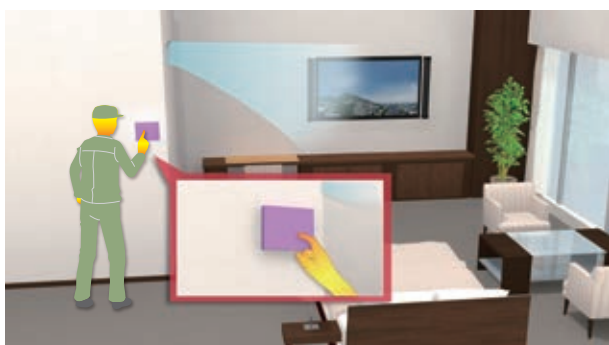

● New model

The initial setup (selecting function parameters) can now be performed in advance on a smartphone, with the settings transmitted to the remote controller by enabling BLE transmission upon entry to the room.




Convenient BLE transmission functions for guests

The remote controller has been further upgraded with hotels in mind, to allow smartphone connectivity and multilingual support.

Smartphone connectivity

For example, hotel guests can operate the air conditioner via their smartphones, without getting out of bed.

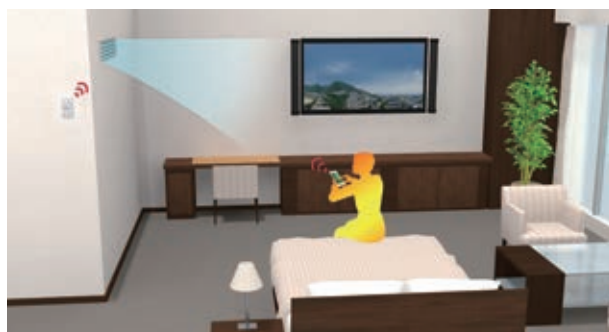

Multilingual support

The smartphone app can be displayed in the language that the guest's smartphone is set to.




CONTROL TECHNOLOGIES

Wireless Remote Controller PAR-SL100A-E

Weekly Timer

The Weekly Timer enables the setting of operation start and finish times and adjusting the temperature as standard features. Up to 4 patterns per day can be set, providing operation that matches the varying conditions of each period, such as the number of customers in the store.

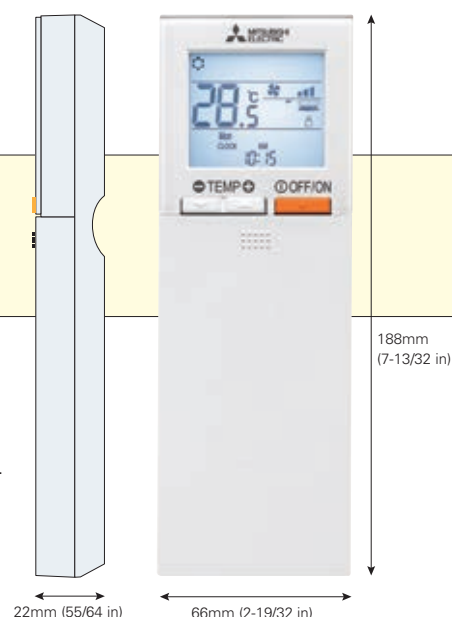

■ Example Operation Pattern (Winter/Heating mode)

	Mon.	Tues.	Wed.	Thurs.	Fri.	Sat.	Sun.
6:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
8:00	Automatically changes to high-power operation at wake-up time						
10:00	OFF	OFF	OFF	OFF	OFF	ON 18°C	ON 18°C
12:00	Automatically turned off during work hours					Midday is warmer, so the temperature is set lower	
14:00							
16:00							
18:00	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C	ON 20°C
20:00	Automatically turns on, synchronized with arrival at home					Automatically raises temperature setting to match time when outside-air temperature is low	
22:00	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C	ON 18°C
(during sleeping hours)	Automatically lowers temperature at bedtime for energy-saving operation at night						

*Weekly Timer cannot be used when On/Off Timer is in use.

*Only for SLZ-KF25/35/50/60VA2, PLA-ZP/RP35/50/60/71/100/125/140EA


Backlight

Backlight function incorporated, making screen easy to read in the dark. Even in dimly lit rooms, the screen can be seen clearly for trouble-free remote controller operation.



Individual Vane Settings

The airflow directions of the four vanes can each be adjusted independently. Easily set the optimum airflow according to the room setting.

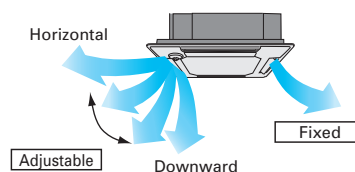


Dual Set Point

When the operation mode is set to the Auto (Dual Set Point) mode, two preset temperatures (one each for cooling and heating) can be set. Depending on the room temperature, the indoor unit will automatically operate in either the COOL or HEAT mode and keep the room temperature within the preset range.



Operation pattern during Auto (Dual Set Point) mode

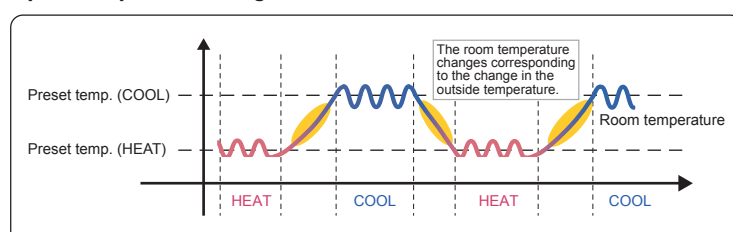

* Only available for compatible models.


Battery Replacement Sign



Previous wireless remote controllers were not easy to read, understand or use sometimes because the battery was low. Beginning with the PAR-SL100A-E, a battery charge indicator that shows the charge status is included in the LCD so it can be seen when the battery is low and needs to be changed.


3D i-see Sensor (Direct/Indirect Airflow)

Pressing the i-see button enables direct or indirect setting of all vanes.

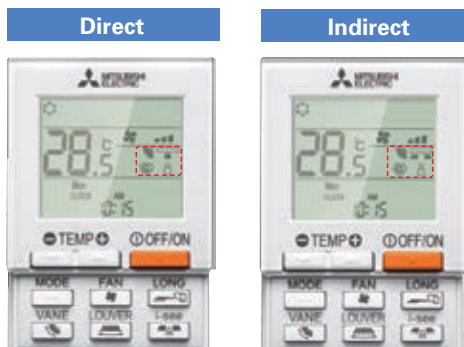


	Vane setting	
	Direct	Indirect
Cooling	horizontal → swing	keep horizontal
Heating	keep downward	downward → horizontal

Direct Airflow

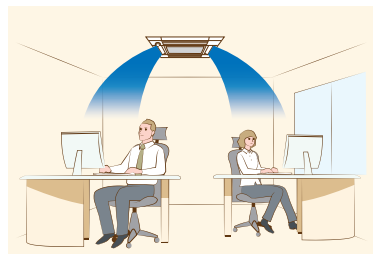

Indirect Airflow

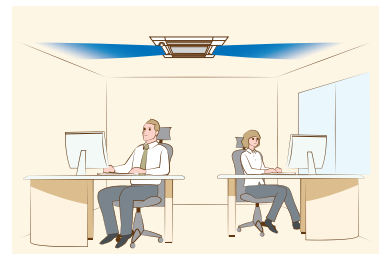

*Only available for models equipped with 3D i-see Sensor.

Basic Functions

Functions	Button	Liquid crystal
OFF / ON	⏻ OFF/ON 	
Preset temperature	⊖ TEMP ⊕ 	88.5°C
Mode	MODE 	Cool Dry Heat Fan Auto Dual set point *Dual Set Point function not operational first use.
Fan speed	FAN 	4-Speed Auto
Vane angle	VANE 	5-step Swing Auto
3D i-see Sensor	i-see 	Direct Indirect
Send sign		
Battery replacement sign		
Function setting		
Test run		
Self check		
Not available		




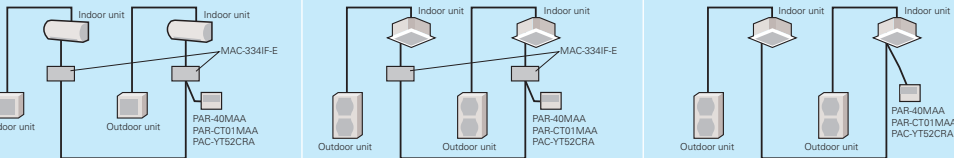

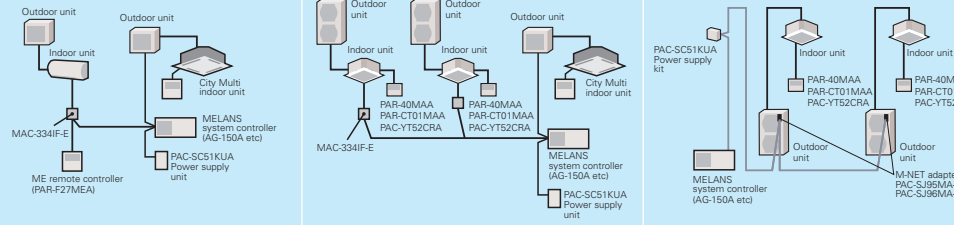
*This remote controller is only compatible with the following models: SLZ-M15/25/35/50/60FA, PLFY-P15/20/25/32/40/50/50VFM-E1, PLA-ZM/RP35/50/60/71/100/125/140EA, PLFY-P20/25/32/40/50/63/80/100/125VEM-E

*Functions available vary according to the model.

SYSTEM CONTROL

Versatile system controls can be realised using optional parts, relay circuits, control panels, etc.

MAJOR SYSTEM CONTROL

	System Examples		
Indoor Unit	M Series Indoor Unit	S Series & P Series Indoor Unit	P Series Indoor Unit
Outdoor Unit	M Series and MXZ Series Outdoor	S Series and MXZ Series Outdoor	P Series Outdoor
 PAR-40MAA Control PAC-YT52CRA Control			
Details	<ul style="list-style-type: none"> Wired remote controller can be connected to indoor unit 		
Major Optional Parts Required	<ul style="list-style-type: none"> MAC-334IF-E (Interface) PAR-40MAA (Wired remote controller) PAR-CT01MAA (Wired remote controller) PAC-YT52CRA (Wired remote controller) 		
 System Group Control			
Details	<ul style="list-style-type: none"> One remote controller can control plural air conditioners with the same settings simultaneously. One remote controller can control up to 16 refrigerant systems. (When connected to a MXZ unit, MAC-334IF-E is counted as one system.) Up to two remote controller can be connected. PAR-SL100A cannot be used when connected through the MAC-334IF-E or when group control is used. 		
Major Optional Parts Required	<ul style="list-style-type: none"> MAC-334IF-E (Interface) PAR-40MAA (Wired remote controller) PAR-CT01MAA (Wired remote controller) PAC-YT52CRA (Wired remote controller) 		
 M-NET Connections			
Details	<ul style="list-style-type: none"> Group of air conditioners can be controlled by MELANS system controller (M-NET). 		
Major Optional Parts Required	<ul style="list-style-type: none"> MAC-334IF-E (M-NET Interface) MELANS System controller PAC-SC51KUA (power supply unit) 		

OTHERS

For M Series Indoor Units (New A-control Models Only)

	System Examples	Connection Details	Control Details	Major Optional Parts Required
1 Remote On/Off Operation <ul style="list-style-type: none"> Air conditioner can be started/stopped remotely. (1) and (2) can be used in combination) 		Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	On/Off operation is possible from a remote location.	<ul style="list-style-type: none"> MAC-334IF-E (Interface) Parts for circuit such as relay box, lead wire, etc. (to be purchased locally)
2 Remote Display of Operation Status <ul style="list-style-type: none"> The On/Off status of air conditioners can be confirmed remotely. (1) and (2) can be used in combination) 		Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	The operation status (On/Off) or error signals can be monitored from a remote location.	<ul style="list-style-type: none"> MAC-334IF-E (Interface) Parts for circuit to be purchased locally (DC power source needed) External power source (12V DC) is required when using MAC-334IF-E.

For P Series and S Series Indoor Units

	System Examples		Details	Major Optional Parts Required
	Wired remote controller	Wireless remote controller		
A 2-remote Controller Control <p>With two remote controllers, control can be performed locally and remotely from two locations.</p>	<p>* Set "Main" and "Sub" remote controllers.</p>	<p>* When using wired and wireless remote controllers</p>	<ul style="list-style-type: none"> Up to two remote controllers can be connected to one group. Both wired and wireless remote controllers can be used in combination. 	<ul style="list-style-type: none"> Wired Remote Controller PAR-40MAA PAC-YT52CRA (for PKA, PAC-SH29TC-E is required) Wireless Remote Controller PAR-SL97A-E/PAR-SL100A-E (only for SLZ) Wireless Remote Controller Kit for PCA PAR-SL94B-E
B Operation Control by Level Signal <p>Air conditioner can be started/stopped remotely. In addition, On/Off operation by local remote controller can be prohibited/permitted.</p>	<p>Relay box (to be purchased locally)</p> <p>Adapter for remote On/Off</p>	<p>Relay box (to be purchased locally)</p> <p>Adapter for remote On/Off</p>	<ul style="list-style-type: none"> Operation other than On/Off (e.g., adjustment of temperature, fan speed, and airflow) can be performed even when remote controller operation is prohibited. Timer control is possible with an external timer. 	<ul style="list-style-type: none"> Adapter for remote On/Off PAC-SE55RA-E Relay box (to be purchased locally) Remote control panel (to be purchased locally)
C Operation Control by Pulse Signal	<p>Relay box (to be purchased locally)</p> <p>Connector cable for remote display</p>	<p>Relay box (to be purchased locally)</p> <p>Connector cable for remote display</p>	<ul style="list-style-type: none"> The pulse signal can be turned On/Off. Operation/emergency signal can be received at a remote location. 	<ul style="list-style-type: none"> Connector cable for remote display PAC-SA88HA-E/PAC-725AD (10 pcs. x PAC-SA88HA-E) Relay box (to be purchased locally) Remote control panel (to be purchased locally)
D Remote Display of Operating Status <p>Operating status can be displayed at a remote location.</p>	<p>Remote operation adapter/Connector cable for remote display + Relay box</p>	<p>Remote operation adapter/Connector cable for remote display + Relay box</p>	<ul style="list-style-type: none"> Operation/emergency signal can be received at a remote location (when channeled through the PAC-SF40RM-E → no-voltage signal, when channeled through the PAC-SA88HA-E → DC 12V signal). 	<ul style="list-style-type: none"> Remote display panel (to be purchased locally) Connector cable for remote display PAC-SA88HA-E/PAC-725AD (10 pcs. x PAC-SA88HA-E) Relay box (to be purchased locally) Remote operation adapter PAC-SF40RM-E * Unable to use with wireless remote controller
E Timer Operation <p>Allows On/Off operation with timer</p> <p>*For control by an external timer, refer to [B] Operation Control by Level Signal.</p>			<ul style="list-style-type: none"> Weekly Timer: On/Off and up to 8 pattern temperatures can be set for each calendar day. (Initial setting) On/Off Timer: On/Off can be set once each within 72 hr in intervals of 5-minute units. Auto-off Timer: Operation will be switched off after a certain time elapse. Set time can be changed from 30 min. to 4 hr. at 10 min. intervals. *Simple Timer and Auto-off Timer cannot be used at the same time. 	<p>Standard functions of PAR-40MAA / PAR-CT01MAA</p>

FUNCTION LIST (1)

Category	Icon		M SERIES							
			Indoor unit	MSZ-LN18/25/35/ 50/60VG2 (W)(V)(R)(B)	MSZ-AP20/25/35/ 42/50/60/71VG	MSZ-FH25/35/ 50VE2	MSZ-EF18/22/25/35/ 42/50VG(W)(B)(S)	MSZ-SF25/35/ 42/50VE3	MSZ-GF60/71VE2	MSZ-BT20/25/35/50VG
	Combination	Outdoor unit	MUZ-LN	MUZ-AP	MUZ-FH	MUZ-EF	MUZ-SF	MUZ-GF	MUZ-BT	
Technology	DC Inverter		●	●	●	●	●	●	●	
	Joint Lap DC Motor		●	●	●	●	●	●	●	
	Reluctance DC Rotary Compressor									
	Heating Caulking (Compressor)		●	●	●	●	●		●	
	DC Fan Motor		●	●	●	●	●	●	●	
	PAM (Pulse Amplitude Modulation)		●	●	●	●	●	●	●	
	Power Receiver and Twin LEV Control									
	Grooved Piping		●	●	●	●	●	●	●	
Functions	i-see Sensor	Felt Temperature Control (3D i-see Sensor)	●		●					
		AREA Temperature Monitor	●		●					
	Energy Saving	Econo Cool Energy-saving Feature	●	●	●	●	●	●	●	
		Standby Power Consumption Cut	●	●	●	●	●	●	●	
	Air Quality	Plasma Quad Plus	●							
		Plasma Quad			●					
		Dual Barrier Coating	●							
		Silver-ionized Air Purifier Filter	Opt	Opt	●	●	Opt	Opt	Opt	
		Air Purifying Filter		●		●	●	●	●	
	Air Distribution	Double Vane	●		●					
		Horizontal Vane	●	●	●	●	●	●	●	
		Vertical Vane	●	●	●		●			
		High Ceiling Mode								
		Auto Fan Speed Mode	●	●	●	●	●		●	
	Convenience	On/off Operation Timer	●	●	●	●	●	●	●	
		"I save" Mode	●	●	●	●	●	●	●	
		Auto Changeover	●	●	●	●	●	●	●	
		Auto Restart	●	●	●	●	●	●	●	
		Low-temperature Cooling	●	●	●	●	●	●	●	
		10°C Heating	●	●					●	
		Low-noise Operation (Outdoor Unit)								
		Night Mode	●	●					●	
		Ampere Limit Adjustment								
		Operation Lock (Indoor)	●	●					●	
		Operation Lock (Outdoor)								
		Built-in Weekly Timer Function	●	●	●	●	●	●		
	System Control	PAR-40MAA Control *3	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		PAR-CT01MAA Control *3	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		PAC-YT52CRA Control *3	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		Centralised On/Off Control *3	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		System Group Control *3	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		M-NET Connection *3	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		Wi-Fi Interface	●	Opt	Opt	Opt	Opt	Opt	Opt	
		Energy Consumption Monitoring through MELCloud								
	Installation	MXZ Connection								
		Cleaning-free Pipe Reuse	●	●	●	●	●	●	●	
		Wiring/Piping Correction Function								
		Drain Pump								
	Maintenance	Flare Connection	●	●	●	●	●	●	●	
		Self-Diagnosis Function (Check Code Display)	●	●	●	●	●	●	●	
	Failure Recall Function		●	●	●	●	●	●	●	

*1 When multiple indoor units connected to an MXZ outdoor unit are running at the same time, simultaneous cooling and heating is not possible.

*2 For the possible connectivity of MXZ outdoor units and indoor units, please refer to the list on pages 113-114 for details.

*3 Please refer to "System Control" on pages for details.

*4 When connected to MXZ outdoor units, the outdoor operating sound will not change.

M SERIES								
	MSZ-WN25/35VA	MSZ-DM25/35VA	MSZ-HJ25/35/50VA	MSZ-HJ60/71VA	MSZ-HR25/35/42/50/60/71VF	MFZ-KJ25/35/50VE2	MFZ-KT25/35/50/60VG	MLZ-KP25/35/50VF
	MUZ-WN	MUZ-DM	MUZ-HJ	MUZ-HJ	MUZ-HR	MUFZ-KJ	SUZ-M	SUZ-M
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●		●		●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
						●	●	
					Opt	●	●	Opt
	●	●	●	●	●	●	●	●
								●
								●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
					●	●	●	●
					●*1	●*1	●*1	●
	●	●	●	●	●	●	●	●
					●	●	●	●
					●			
					●			
						●	●	●
	Opt	Opt			Opt	Opt	Opt	Opt
	Opt	Opt			Opt	Opt	Opt	Opt
		Opt			Opt	Opt	Opt	Opt
		Opt			Opt	Opt	Opt	Opt
		Opt			Opt	Opt	Opt	Opt
	Opt	Opt			Opt	Opt	Opt	Opt
	●	●	●	●	●	●	●	●
								●
								●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●

• The figures listed in the table are "only when combined with an outdoor unit with the appropriate capacity range".
 • Opt: Separate parts must be purchased.

FUNCTION LIST (2)

Category	Icon		S SERIES					
			SLZ-M15/25/35/50/60FA *4				SEZ-M25/35/50/60/71DA(L)	
	Combination	Indoor unit						
		Outdoor unit	SUZ-M	SUZ-KA	PUZ-ZM	PUHZ-ZRP	SUZ-M	SUZ-KA
Technology	DC Inverter		●	●	●	●	●	●
	Joint Lap DC Motor		●	●			●	●
	Magnetic Flux Vector Sine Wave Drive				●	●		
	Reluctance DC Rotary Compressor		●	●			●	●
	Highly Efficient DC Scroll Compressor				●	●		
	Heating Caulking (Compressor)		●	●			●	●
	DC Fan Motor		●	●	●	●	●	●
	Vector-Wave Eco Inverter				●	●		
	PAM (Pulse Amplitude Modulation)		●	●	●	●	●	●
	Power Receiver and Twin LEV Control				●	●		
	Grooved Piping		●	●	●	●	●	●
Functions	i-see Sensor	Felt Temperature Control (3D i-see Sensor)	Opt	Opt	Opt	Opt		
		AREA Temperature Monitor	Opt	Opt	Opt	Opt		
	Energy Saving	Demand Function						
	Attractive	Pure White	●	●	●	●		
		Auto Vane	●	●	●	●		
	Air Quality	Fresh-air Intake	●	●	●	●		
		High-efficiency Filter						
		Oil Mist Filter						
		Long-life Filter	●	●	●	●		
	Air Distribution	Filter Check Signal	●	●	●	●		
		Horizontal Vane	●	●	●	●		
		Vertical Vane						
		High Ceiling Mode	●	●	●	●		
		Low Ceiling Mode						
	Convenience	Auto Fan Speed Mode	●	●	●	●	●	●
		On/off Operation Timer	●	●	●	●	●	●
		Auto Changeover	●	●	●	●	●	●
		Auto Restart	●	●	●	●	●	●
		Low-temperature Cooling	●	●	●	●	●	●
		Low-noise Operation (Outdoor Unit)			●	●		
		Ampere Limit Adjustment			60-140V	60-140V		
		Operation Lock						
		Rotation, Back-up and 2nd Stage Cut-in Functions			●	●		
	System Control	Dual Set Point *3			●	●		
		PAR-40MAA Control *1	Opt	Opt	Opt	Opt	Opt	Opt
		PAR-CT01MAA Control *1	Opt	Opt	Opt	Opt	Opt	Opt
		PAC-YT52CRA Control *1	Opt	Opt	Opt	Opt	Opt	Opt
		Centralised On/Off Control *1	Opt	Opt	Opt	Opt	Opt	Opt
		System Group Control *1	Opt	Opt	Opt	Opt	Opt	Opt
		M-NET Connection *1	Opt	Opt			Opt	Opt
		COMPO *2			71-140	71-140		
		Energy Consumption Monitoring through MELCloud						
		MXZ Connection						
	Installation	Cleaning-free Pipe Reuse	●	●	●	●	●	●
		Reuse of Existing Wiring						
		Wiring/Piping Correction Function						
		Drain Pump	●	●	●	●	Opt	Opt
		Pump Down Switch						
		Flare Connection	●	●	●	●	●	●
	Maintenance	Self-Diagnosis Function (Check Code Display)	●	●	●	●	●	●
		Failure Recall Function	●	●	●	●	●	●

*1 Please refer to "System Control" on pages for details.

*2 Please refer to page 57 for details.

*3 This function is only available with PAR-40MAA, PAC-YT52CRA.

*4 SLZ-M15 can be connected with R32 MXZ only.

• If a numerical figure is listed, the feature is only available with the outdoor unit of that capacity.
• Opt: Optional parts must be purchased.

Category	Icon			P SERIES									
	Combination	Indoor unit	PLA-ZM35/50/60/71/100/125/140EA			PLA-M35/50/60/71/100/125/140EA							
		Outdoor unit	PUHZ-SHW	PUZ-ZM	PUHZ-ZRP	PUHZ-SHW	PUZ-ZM	PUHZ-ZRP	SUZ-M	SUZ-KA	PUZ-M	PUHZ-P	
Technology	DC Inverter		●	●	●	●	●	●	●	●	●	●	
	Joint Lap DC Motor			35-71	35-71		35-71	35-71	●	●	100	100	
	Magnetic Flux Vector Sine Wave Drive		●	●	●	●	●	●			●	●	
	Reluctance DC Rotary Compressor			35-71	35-71		35-71	35-71	●	●	100-140	100-140	
	Highly Efficient DC Scroll Compressor		●	100-250	100-250	●	100-250	100-250			200-250	200-250	
	Heating Caulking (Compressor)			35-71	35-71		35-71	35-71	●	●	100	100	
	DC Fan Motor		●	●	●	●	●	●	●	●	●	●	
	Vector-Wave Eco Inverter		●	●	●	●	●	●			●	●	
	PAM (Pulse Amplitude Modulation)		●	35-140	35-140	●	35-140	35-140	●	●	100-140V	100-140V	
	Power Receiver and Twin LEV Control		●	35-250	35-140	●	35-250	35-140			100-250	100-140	
	Grooved Piping		●	●	●	●	●	●	●	●	●	●	
Functions	i-see Sensor	Felt Temperature Control (3D i-see Sensor)		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		AREA Temperature Monitor		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
	Energy Saving	Demand Function		Opt	Opt	Opt	Opt	Opt	Opt		Opt	Opt	
	Attractive	Pure White		●	●	●	●	●	●	●	●	●	●
		Auto Vane		●	●	●	●	●	●	●	●	●	●
	Air Quality	Fresh-air Intake		●	●	●	●	●	●	●	●	●	●
		High-efficiency Filter		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		Oil Mist Filter											
		Long-life Filter		●	●	●	●	●	●	●	●	●	●
	Air Distribution	Filter Check Signal		●	●	●	●	●	●	●	●	●	●
		Horizontal Vane		●	●	●	●	●	●	●	●	●	●
		Vertical Vane											
		High Ceiling Mode		●	●	●	●	●	●	●	●	●	●
		Low Ceiling Mode		●	●	●	●	●	●	●	●	●	●
	Convenience	Auto Fan Speed Mode		●	●	●	●	●	●	●	●	●	●
		On/off Operation Timer		●	●	●	●	●	●	●	●	●	●
		Auto Changeover		●	●	●	●	●	●	●	●	●	●
		Auto Restart		●	●	●	●	●	●	●	●	●	●
		Low-temperature Cooling		●	●	●	●	●	●	●	●	●	●
		Low-noise Operation (Outdoor Unit)		●	●	●	●	●	●			●	●
		Ampere Limit Adjustment		112/140	60-140V 200/250	60-140V 200/250	112/140	60-140V 200/250	60-140V 200/250				
		Operation Lock											
		Rotation, Back-up and 2nd Stage Cut-in Functions		●	●	●	●	●	●			●	●
	System Control	Dual Set Point *4			●	●		●	●			●	●
		PAR-40MAA Control *1		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		PAR-CT01MAA Control *1		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		PAC-YT52CRA Control *1		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		Centralised On/Off Control *1		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		System Group Control *1		●	●	●	●	●	●	Opt	Opt	●	●
		M-NET Connection *1		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
		COMPO *2		●	71-250	71-250	●	71-250	71-250			●	●
	Installation	Energy Consumption Monitoring through MELCloud											
		MXZ Connection											
		Cleaning-free Pipe Reuse		●	●	●	●	●	●	●	●	●	●
		Reuse of Existing Wiring		Opt	Opt	Opt	Opt	Opt	Opt			Opt	Opt
		Wiring/Piping Correction Function											
		Drain Pump		●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3	●*3
		Pump Down Switch		●	●	●	●	●	●			●	●
	Maintenance	Flare Connection		●	●	●	●	●	●	●	●	●	●
		Self-Diagnosis Function (Check Code Display)		●	●	●	●	●	●	●	●	●	●
	Failure Recall Function		●	●	●	●	●	●	●	●	●	●	●

*1 Please refer to "System Control" on pages for details.

*2 Please refer to page 64 for details.

*3 PEAD-M JAL are not equipped with a drain pump.

*4 This function is only available with PAR-40MAA, PAC-YT52CRA.

• If a numerical figure is listed, the feature is only available with the outdoor unit of that capacity.

• Opt: Optional parts must be purchased.

FUNCTION LIST (2)

Category	Icon			P SERIES															
	Combination	Indoor unit	PEAD-M35/50/60/71/100/125/140JA(L)							PEAD-M35/50/60/71/JA(L)	PEA-RP200/250 WKA		PKA-M35/50HA(L)						
		Outdoor unit	PUHZ-SHW	PUZ-ZM	PUHZ-ZRP	PUZ-M	PUHZ-P	SUZ-M	SUZ-KA	PUHZ-ZRP	PUHZ-P	PUZ-ZM	PUHZ-ZRP	PUZ-M	PUHZ-P				
Technology	DC Inverter			●	●	●	●	●	●	●	●	●	●	●	●	●			
	Joint Lap DC Motor				35-71	35-71	100	100	●	●			35-71	35-71	100	100			
	Magnetic Flux Vector Sine Wave Drive			●	●	●	●	●			●	●	●	●	●	●			
	Reluctance DC Rotary Compressor				35-71	35-71	100-140	100-140	●	●			35-71	35-71	●	100-140			
	Highly Efficient DC Scroll Compressor			●	100-250	100-250	200/250	200/250			●	●	100-200	100-200		200			
	Heating Caulking (Compressor)				35-71	35-71	100	100	●	●			35-71	35-71					
	DC Fan Motor			●	●	●	●	●	●	●	●	●	●	●	●	●			
	Vector-Wave Eco Inverter			●	●	●	●	●			●	●	●	●	●	●			
	PAM (Pulse Amplitude Modulation)			●	35-140	35-140	100-140V	100-140V	●	●			35-140	35-140	100V-140V	100V-140V			
	Power Receiver and Twin LEV Control			●	35-250	35-140	100-250	100-140					35-250	35-140	100-140	100-140			
Grooved Piping			●	●	●	●	●	●	●	●	●	●	●	●	●	●			
Functions	i-see Sensor	Felt Temperature Control (3D i-see Sensor)																	
		AREA Temperature Monitor																	
	Energy Saving	Demand Function			Opt	Opt	Opt	Opt	Opt			Opt	Opt	Opt	Opt	Opt			
	Attractive	Pure White												●	●	●	●		
		Auto Vane											●	●	●	●			
	Air Quality	Fresh-air Intake																	
		High-efficiency Filter																	
		Oil Mist Filter																	
		Long-life Filter			●	●	●	●	●	●	●								
		Filter Check Signal			●	●	●	●	●	●	●			Opt	Opt	Opt	Opt		
	Air Distribution	Horizontal Vane												●	●	●	●		
		Vertical Vane																	
		High Ceiling Mode																	
		Low Ceiling Mode																	
		Auto Fan Speed Mode			●	●	●	●	●	●	●			●	●	●	●		
	Convenience	On/off Operation Timer			●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Auto Changeover			●	●	●	●	●	●	●	●	●	●	●	●	●		
		Auto Restart			●	●	●	●	●	●	●	●	●	●	●	●	●		
		Low-temperature Cooling			●	●	●	●	●	●	●	●	●	●	●	●	●		
		Low-noise Operation (Outdoor Unit)			●	●	●	●	●			●	●	●	●	●	●		
		Ampere Limit Adjustment			112/140	60-140V 200/250	60-140V 200/250					●		60-140V 200/250	60-140V 200/250				
		Operation Lock																	
		Rotation, Back-up and 2nd Stage Cut-in Functions			●	●	●	●	●					●	●	●	●		
		Dual Set Point *4				●	●	●	●	●			●	●	●	●	●	●	
		System Control	PAR-40MAA Control *1			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
	PAR-CT01MAA Control *1			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt			
	PAC-YT52CRA Control *1			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt			
	Centraliesd On/Off Control *1			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt			
	System Group Control *1			●	●	●	●	●	Opt	Opt	●	●	Opt	Opt	Opt	Opt			
	M-NET Connection *1			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt			
	COMPO *2			●	71-250	71-250	●	●					71-250	71-250	●	●			
	Energy Consumption Monitoring through MELCloud																		
	Installation	MXZ Connection																	
		Cleaning-free Pipe Reuse			●	●	●	●	●	●	●	●	●	●	●	●	●		
		Reuse of Existing Wiring			Opt	Opt	Opt	Opt	Opt					Opt	Opt	Opt	Opt		
		Wiring/Piping Correction Function																	
		Drain Pump			●*3	●*3	●*3	●*3	●*3	●*3	●*3			Opt	Opt	Opt	Opt		
		Pump Down Switch			●	●	●	●	●			●	●	●	●	●	●		
		Flare Connection			●	●	●	●	●	●	●	●	●	●	●	●	●		
	Maintenance	Self-Diagnosis Function (Check Code Display)			●	●	●	●	●	●	●	●	●	●	●	●	●		
		Failure Recall Function			●	●	●	●	●	●	●	●	●	●	●	●	●		

*1 Please refer to "System Control" on pages for details.

*2 Please refer to page 64 for details.

*3 Please refer to page 64 for details.

*3 PEAD-M JAL are not equipped with a drain pump.

*4 This function is only available with PAR-40MAA, PAC-YT52CRA.

P SERIES															
	PKA-M60/71/100KA(L)					PCA-M35/50/60/71/100/125/140KA						PCA-M71HA		PSA-RP71/100/125/140KA	
	PUHZ -SHW	PUZ -ZM	PUHZ -ZRP	PUZ -M	PUHZ -P	PUZ -ZM	PUHZ -ZRP	PUZ -M	PUHZ -P	SUZ -M	SUZ -KA	PUZ -ZM	PUHZ -ZRP	PUHZ -ZRP	PUHZ -P
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
		60/71	60/71	100	100	35-71	35-71	100	100	●	●	71	71	71	100
	●	●	●	●	●	●	●	●	●			●	●	●	●
		60/71	60/71	100-140	100-140	35-71	35-71	100-140	100-140	●	●	71	71	71	100-140
	●	100-250	100-250	200/250	200/250	100-250	100-250	200/250	200/250			100-250	100-250	100-250	200/250
		60/71	60/71	100	100	35-71	35-71	100	100	●	●	71	71	71	100
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●			●	●	●	●
	●	60-140	60-140	100-140V	100-140V	35-140	35-140	100-140V	100-140V	●	●	71-140	71-140	71-140	100-140V
	●	60-250	60-140	100-250	100-140	35-250	35-140	100-250	100-140			71-250	71-140	71-140	100-140
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt			Opt	Opt	Opt	Opt
	●	●	●	●	●	●	●	●	●	●	●			●	●
	●	●	●	●	●	●	●	●	●	●	●				
						Opt	Opt	Opt	Opt	Opt	Opt	●	●		
						●	●	●	●	●	●			●	●
	Opt	Opt	Opt	Opt	Opt	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●				
						●	●	●	●	●	●			●	●
						●	●	●	●	●	●				
	●	●	●	●	●	●	●	●	●	●	●			●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●			●	●	●	●
	112/140	60-140V 200/250	60-140V 200/250			60-140V 200/250	60-140V 200/250						71-140V 200/250	71-140V 200/250	
	●	●	●	●	●	●	●	●	●			●	●		
		●	●	●	●	●	●	●	●						
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt		
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt		
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt		
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	●	●	●	●	Opt	Opt	●	●	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt
	●	71-250	71-250	●	●	71-250	71-250	●	●			71-250	71-250	71-250	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt			Opt	Opt	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt				
	●	●	●	●	●	●	●	●	●			●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

• If a numerical figure is listed, the feature is only available with the outdoor unit of that capacity.
• Opt: Optional parts must be purchased.

FUNCTION LIST (2)

Category	Icon	Series	MXZ SERIES															
			Std					Lo-std		H2i		Std			Lo-std			
			MXZ-VA(2)					MXZ-VA		MXZ-VA		MXZ-VF			MXZ-VF			
			2D	3E	4E	5E	6D	2DM	3DM	2E	4E	2F	3F	4F	2HA	3HA		
Technology	DC Inverter		●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Jolint Lap DC Motor		●	●	●	●		●	●	●		●	●	●	●	●		
	Magnetic Flux Vector Sine Wave Drive																	
	Reluctance DC Rotary Comperssor				83	●	●											
	Highly Efficient DC Scroll Compressor																	
	Heating Caulking (Compressor)		●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	DC Fan Motor		●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Vector-Wave Eco Inverter																	
	PAM (Pulse Amplitude Modulation)		●	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Power Receiver and Twin LEV Control			●	72			●				●	●			●		
Grooved Piping		●	●	●	●	●	●	●	●	●	●	●	●	●	●			
Functions	i-see Sensor	Felt Temperature Control (3D i-see)																
		AREA Temperature Monitor																
	Energy Saving	Demand Function																
	Attractive	Pure White																
		Auto Vane																
	Air Quality	Fresh-air Intake																
		High-efficiency Filter																
		Oil Mist Filter																
		Filter Check Signal																
	Air Distribution	Horizontal Vane																
		Vertical vane																
		High Ceiling Mode																
		Auto Fan Speed Mode																
	Convenience	On/off Operation Timer																
		Auto Changeover		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Auto Restart		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Low- temperature Cooling		●	●	●	●	●	●		●	●	●	●	●	●	●	
		10°C Heating		●*1	●*1	●*1	●*1	●*1			●*1	●*1	●*1	●*1	●*1			
		Low-noise Operation (Outdoor)		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Night Mode																
		Ampere Limit Adjustment				83	●	●			●	●						
		Operation Lock (Indoor)																
		Operation Lock (Outdoor)		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Built-in Weekly Timer Function																
		Rotation, Back-up abd 2nd Stage Cut-in Functions																
		Dual Set Point																
	System Control	PAR-40MAA Control		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		PAR-CT01MAA Cotrol		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		PAC-YT52CRA Control		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		Centralised On/off Control		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		System Group Control		Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	
		M-NET Connection				Opt (83)	Opt	Opt			Opt	Opt						
		Wi-Fi Interface																
		Energy/Consumption Monitoring trouth MEL Cloud																
		COMPO																
		MXZ Connection		●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2	●*2
	Installation	Cleaning-free Pipe Reuse											●*3			●*3	●*3	
		Reuse of Existing Wiring																
		Wiring/Piping Correction Function		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Drain Pump																
		Pump Down Switch			●	●	●	●		●		●		●	●		●	
		Flare Connection		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Maintenance	Self-Diagnosis Function (Check Code Display)		●	●	●	●	●	●	●	●	●	●	●	●	●	●	
		Failure Recall Function		●	●	●	●	●	●	●	●	●	●	●	●	●	●	

*1 When multiple indoor units connected to an MXZ outdoor unit are running at the same time, simultaneous cooling and heating is not possible.












*2 For the possible connectivity of MXZ outdoor units and indoor units, please refer to the list on pages 113 for details.












*3 Please refer to "System Control" on pages for details.













	MXZ SERIES					
	Std					
	MXZ-VF2			MXZ-VF3		
	2F	3F	4F	2F	3F	4F
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
		●	●		●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●*1	●*1	●*1	●*1	●*1	●*1
	●	●	●	●	●	●
	●	●	●	●	●	●
	Opt	Opt	Opt	Opt	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	Opt
	Opt	Opt	Opt	Opt	Opt	Opt
	●*2	●*2	●*2	●*2	●*2	●*2
	●*3	●*3	● 3	●*3	●*3	●*3
	●	●	●	●	●	●
		●	●		●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●









• The figures listed in the table are "only when combined with an outdoor unit with the appropriate capacity range".
 • Opt: Separate parts must be purchased.

Major Optional Parts

Part Name	Description
Deodorising Filter Captures small foul-smelling substances in the air.	 Deodorising filter
Air-cleaning Filter Removes fine dust particles from the air by means of static electricity.	 Air-cleaning filter
Silver-ionized Air Purifier Filter Captures the bacteria, pollen and other allergens in the air and neutralises them.	 Silver-ionized Air Purifier Filter
Oil Mist Filter Element Filter element (12 pieces) that blocks the oil mist for ceiling-suspended models used in professional kitchens.	 Oil mist filter
High-efficiency Filter Element Element for high-efficiency filter. Removes fine dust particles from the air.	 *For 4-way cassette units (PLA)
3D i-see Sensor Corner Panel for SLZ Corner panel holding the 3D i-see Sensor.	 i-see Sensor corner panel
3D i-see Sensor Corner Panel for PLA Corner panel holding the 3D i-see Sensor.	 i-see Sensor corner panel
Shutter Plate Plate for blocking an air outlet of the 4-way cassette (PLA) indoor unit.	 Shutter Plate
Multi-functional Casement Casement for fresh-air intake and attaching the high-efficiency filter element (optional).	 Indoor unit body Multi-functional casement
Fresh-air Intake Duct Flange Flange attachment for adding a duct to take in fresh air from outside.	 *For 4-way cassette units (PLA)
Space Panel Decorative cover for the installation when the ceiling height is low.	 Space Panel Panel

Part Name	Description
Drain Pump Pumps drain water to a point higher than that where the unit is installed.	 *for ceiling-suspended units
Decorative Cover To be attached to the upper section of ceiling-suspended models for professional kitchen use. Helps prevent dust accumulation.	 Decorative cover Indoor unit
MA & Contact Terminal Interface Interface for connecting with the PAR-40MAA remote controller and PAC-YT52CRA, and to relay operation signals.	 Indoor unit MA & contact terminal interface
System Control Interface Interface to connect with M-NET controllers.	 Indoor unit System control interface
Wi-Fi Interface Interface enabling users to control air conditioners and check operating status via devices such as personal computers, tablets and smartphones.	 Indoor unit WiFi interface Smartphone
Connector Cable This product is an adaptor which inputs the incoming signals from an open/close switch to the air conditioner and outputs the on/off signals from the air conditioner to the back-up heater.	 Indoor unit Switch Relay
Power Supply Terminal Kit Terminal bed to change the power supply from outdoor power supply to separate indoor/outdoor power supplies.	
Wired Remote Controller Advanced deluxe remote controller with full-dot liquid-crystal display and backlight. Equipped with convenient functions like night-setback.	
MA Touch Remote Controller Remote controller with the full color touch display. Smartphone/Tablet App is available for setting, customize and control.	
Simple Wired Remote Controller Remote controller with liquid-crystal display, and backlight function for operation in dark location.	
Remote Controller Terminal Block Kit for PKA The terminal block is used as a relay to wire an indoor unit and to two remote controllers or to wire a remote controller and multiple indoor units in order to perform group control.	

Part Name	Description
Wireless Remote Controller Signal Sender Handheld unit for sending operation signals to the indoor unit.	 Handheld unit
Wireless Remote Controller Signal Receiver Receives operation signals from the wireless remote controller handheld unit.	 Signal receiver
Wireless Remote Controller Kit (Sender & Receiver) Remote controller handheld unit (signal sender) and receiver (signal receiver) for ceiling-suspended units.	 Signal receiver Signal sender
Control Holder Holder for storing the remote controller.	 Control holder
Remote Sensor Sensor to detect the room temperature at remote positions.	 Remote sensor
Remote On/Off Adapter Connector for receiving signals from the local system to control the on/off function.	 Remote on/off adapter
Remote Operation Adapter Adapter to display the operation status and control on/off function from a distance.	 Remote operation adapter
Connector Cable for Remote Display Connector used to display the operation status and control on/off function from a distance.	 Connector cable for remote display Brown Red Orange Yellow Green
Distribution Pipe Branch pipe for P Series simultaneous multi-system use, or to connect two branch boxes for PUMY.	 Indoor unit Indoor unit Distribution pipe Outdoor unit *P Series with 2 indoor units
Joint Pipe Part for connecting refrigerant pipes of different diameters.	 Indoor unit Joint pipe Onsite pipe Insulator Outdoor unit
Liquid Refrigerant Dryer Removes water and minute particles from refrigerant pipes.	
Branch Box Outer Cover Casement for branch boxes.	 Complete view Branch box outer cover

Part Name	Description
Air Discharge Guide Changes the direction of air being exhausted from the outdoor unit.	
Air Protection Guide Protects the outdoor unit from the wind.	
Drain Socket A set of caps to cover unnecessary holes at the bottom of the outdoor unit, and a socket to guide drain water to the local drain pipe.	 Cap Socket
Centralised Drain Pan Catches drain water generated by the outdoor unit.	 Outdoor unit Centralised drain pan Base (local construction)
M-NET Converter Used to connect P Series A-control models to M-NET controllers.	 Group remote controller Power supply unit for transmit cable M-NET Converter
Control/Service Tool Monitoring tool to display operation and self-diagnosis data.	 Control/service tool
Step Interface Interface for adjusting the capacity of inverter-equipped outdoor units.	 Case interior Installed in case
High-static Fan Motor Static pressure enhanced up to +30pa.	

Optional Parts List <Indoor>

Indoor Unit			Option	Filter						Softdry cloth	System Control Interface	MA & Contact Terminal Interface	Wi-Fi Interface	Connector Cable		Wired Remote Controller			
				Silver-ionized Air Purifier Filter				Deodorising Filter								Controller			Controller Holder
				MAC-2360 FT	MAC-2370 FT	MAC-2380 FT	MAC-2390 FT	MAC-3000 FT-E	MAC-3010 FT-E							MAC-1001 CL-E	MAC-334IF-E	MAC-397IF-E	MAC-567IF-E
M SERIES	Wall-mounted	MSZ-LN18VG2(W)(V)(R)(B)																	
		MSZ-LN25VG2(W)(V)(R)(B)																	
		MSZ-LN35VG2(W)(V)(R)(B)																	
		MSZ-LN50VG2(W)(V)(R)(B)																	
		MSZ-LN60VG2(W)(V)(R)(B)																	
		MSZ-AP15VG																	
		MSZ-AP20VG																	
		MSZ-AP25VG																	
		MSZ-AP35VG																	
		MSZ-AP42VG																	
		MSZ-AP50VG																	
		MSZ-AP60VG																	
		MSZ-AP71VG																	
		MSZ-FH25VE2																	
		MSZ-FH35VE2																	
		MSZ-FH50VE2																	
		MSZ-EF18VG(W)(B)(S)																	
		MSZ-EF22VG(W)(B)(S)																	
		MSZ-EF25VG(W)(B)(S)																	
		MSZ-EF35VG(W)(B)(S)																	
		MSZ-EF42VG(W)(B)(S)																	
		MSZ-EF50VG(W)(B)(S)																	
		MSZ-SF15VA																	
		MSZ-SF20VA																	
		MSZ-SF25VE3																	
		MSZ-SF35VE3																	
		MSZ-SF42VE3																	
		MSZ-SF50VE3																	
		MSZ-GF60VE2																	
		MSZ-GF71VE2																	
		MSZ-BT20VG																	
		MSZ-BT25VG																	
		MSZ-BT35VG																	
		MSZ-BT50VG																	
	MSZ-WN25VA																		
	MSZ-WN35VA																		
	MSY-TP35VF																		
	MSY-TP50VF																		
	MSZ-DM25VA																		
	MSZ-DM35VA																		
	MSZ-HJ25VA																		
	MSZ-HJ35VA																		
	MSZ-HJ50VA																		
	MSZ-HJ60VA																		
	MSZ-HJ71VA																		
	MSZ-HR25VF																		
	MSZ-HR35VF																		
	MSZ-HR42VF																		
	MSZ-HR50VF																		
	MSZ-HR60VF																		
MSZ-HR71VF																			
Floor-standing	MFZ-KJ25VE2																		
	MFZ-KJ35VE2																		
	MFZ-KJ50VE2																		
	MFZ-KT25VG																		
	MFZ-KT35VG																		
	MFZ-KT50VG																		
1-way cassette	MLZ-KP25VF																		
	MLZ-KP35VF																		
	MLZ-KP50VF																		

*1 MAC-334IF-E or MAC-397IF-E is required.

Optional Parts List <Indoor>

Option			Filter								3D i-see Sensor Corner Panel	Shutter Plate	Multi- functional Casement	Fresh-air Intake Duct Flange		Space Panel	Drain Pump						Decorative Cover		System Control Interface		
			Oil Mist Filter Element	High-efficiency Filter Element				Filter Box																			
			PAC- SG38 KF-E	PAC- SH59 KF-E	PAC- SH88 KF-E	PAC- SH89 KF-E	PAC- SH90 KF-E	PAC- KE92 TB-E	PAC- KE93 TB-E	PAC- KE94 TB-E																PAC- KE95 TB-E	PAC- SF1 ME-E
Indoor Unit																											
S SERIES	4-way cassette	SLZ-M15FA																									
		SLZ-M25FA																									
		SLZ-M35FA																									
		SLZ-M50FA																									
		SLZ-M60FA																									
	Ceiling - conceald	SEZ-M25DA(L)																									
		SEZ-M35DA(L)																									
		SEZ-M50DA(L)																									
		SEZ-M60DA(L)																									
		SEZ-M71DA(L)																									
P SERIES	4-way Cassette	PLA-ZM35EA																									
		PLA-ZM50EA																									
		PLA-ZM60EA																									
		PLA-ZM71EA																									
		PLA-ZM100EA																									
		PLA-ZM125EA																									
		PLA-ZM140EA																									
		PLA-M35EA																									
		PLA-M50EA																									
		PLA-M60EA																									
		PLA-M71EA																									
		PLA-M100EA																									
		PLA-M125EA																									
		PLA-M140EA																									
	Ceiling - conceald	PEAD-M35JA(L)																									
		PEAD-M50JA(L)																									
		PEAD-M60JA(L)																									
		PEAD-M71JA(L)																									
		PEAD-M100JA(L)																									
		PEAD-M125JA(L)																									
		PEAD-M140JA(L)																									
		PEA-RP200WKA																									
	Wall - mounted	PKA-M35HA(L)																									
		PKA-M50HA(L)																									
		PKA-M60KA(L)																									
		PKA-M71KA(L)																									
		PKA-M100KA(L)																									
	Ceiling - suspended	PCA-M35KA																									
		PCA-M50KA																									
		PCA-M60KA																									
		PCA-M71KA																									
		PCA-M100KA																									
		PCA-M125KA																									
		PCA-M140KA																									

*1 P Series indoor units can be used in combination with SUZ or MXZ outdoor units.

*2 Unable to use with wireless remote controller.

*3 PAC-SH29TC-E is required.

*4 Group control cannot be used.

[illegible]

Optional Parts List <Outdoor>

Option			Distribution Pipe						Joint Pipe							Liquid Refrigerant Dryer			
			For Twin (50:50)		For Triple (33:33:33)		For Quadruple (25:25:25:25)		Unit ø6.35 --> Pipe ø9.52	Unit ø9.52 --> Pipe ø12.7	Unit ø15.88 --> Pipe ø19.05	Unit ø9.52 --> Pipe ø15.88	Unit ø6.35 --> Pipe ø9.52	Unit ø9.52 --> Pipe ø12.7	Unit ø12.7 --> Pipe ø9.52	Unit ø12.7 --> Pipe ø15.88	For pipe ø6.35	For pipe ø9.52	For pipe ø12.7
			MSDD- 50TR-E	MSDD- 50WR-E	MSDT- 111R-E	MSDT- 111R3-E	MSDF- 1111R-E	MSDF- 1111R2-E	PAC- SG72 RJ-E	PAC- SG73 RJ-E	PAC- SG75 RJ-E	PAC- SG76 RJ-E	PAC- 493 PI	Flare			PAC- SG81 DR-E	PAC- SG82 DR-E	PAC- SG85 DR-E
Outdoor Unit																			
M SERIES	L Series	MUZ-LN25VG																	
		MUZ-LN25VGHZ																	
		MUZ-LN35VG																	
		MUZ-LN35VGHZ																	
		MUZ-LN50VG																	
		MUZ-LN50VGHZ																	
	A Series	MUZ-LN60VG																	
		MUZ-AP20VG																	
		MUZ-AP25VG																	
		MUZ-AP25VGH																	
		MUZ-AP35VG																	
		MUZ-AP35VGH																	
		MUZ-AP42VG																	
		MUZ-AP42VGH																	
		MUZ-AP50VG																	
		MUZ-AP50VGH																	
	F Series	MUZ-AP60VG																	
		MUZ-AP71VG																	
		MUZ-FH25VE																	
		MUZ-FH25VEHZ																	
		MUZ-FH35VE																	
	E Series	MUZ-FH35VEHZ																	
		MUZ-FH50VE																	
		MUZ-FH50VEHZ																	
		MUZ-EF25VE																	
		MUZ-EF25VEH																	
	S Series	MUZ-EF35VE																	
		MUZ-EF35VEH																	
		MUZ-EF42VE																	
		MUZ-EF50VE																	
		MUZ-SF25VE																	
		MUZ-SF25VEH																	
		MUZ-SF35VE																	
	G Series	MUZ-SF35VEH																	
		MUZ-SF42VE																	
		MUZ-SF42VEH																	
	BT Series	MUZ-SF50VE																	
		MUZ-SF50VEH																	
		MUZ-GF60VE																	
	W Series	MUZ-GF71VE																	
MUZ-BT20VG																			
MUZ-BT25VG																			
TP Series	MUZ-BT35VG																		
	MUZ-BT50VG																		
D Series	MUZ-WN25VA																		
	MUZ-WN35VA																		
H Series	MUY-TP35VF																		
	MUY-TP50VF																		
	MUZ-DM25VA																		
	MUZ-DM35VA																		
	MUZ-HJ25VA																		
HR Series	MUZ-HJ35VA																		
	MUZ-HJ50VA																		
	MUZ-HJ60VA																		
	MUZ-HJ71VA																		
	MUZ-HR25VF																		
Compact floor	MUZ-HR35VF																		
	MUZ-HR42VF																		
	MUZ-HR50VF																		
	MUZ-HR60VF																		
	MUZ-HR71VF																		
S SERIES (R32)	MUFZ-KJ25VE																		
	MUFZ-KJ25VEHZ																		
	MUFZ-KJ35VE																		
	MUFZ-KJ35VEHZ																		
	MUFZ-KJ50VE																		
S SERIES (R410A)	MUFZ-KJ50VEHZ																		
	SUZ-M25VA																		
	SUZ-M35VA																		
	SUZ-M50VA																		
	SUZ-M60VA																		
S SERIES (R410A)	SUZ-M71VA																		
	SUZ-KA25VA6																		
	SUZ-KA35VA6																		
	SUZ-KA50VA6																		
S SERIES (R410A)	SUZ-KA60VA6																		
	SUZ-KA71VA6																		

Optional Parts List <Outdoor>

[illegible]

	Branch Box Outer Cover	Reactor Box	Different Diameter Joint						Different Diameter Joint For Brazing Model					
			ø9.52-->ø12.7	ø12.7-->ø9.52	ø12.7-->ø15.88	ø6.35-->ø9.52	ø9.52-->ø15.88	ø9.52-->ø12.7	ø12.7-->ø9.52	ø12.7-->ø15.88	ø6.35-->ø9.52	ø9.52-->ø15.88		
	PAC-AK350CVR-E	PAC-RB01BC	MAC-A454JP	MAC-A455JP	MAC-A456JP	PAC-493PI	PAC-SG76RJ-E	PAC-SG78RJ-B-E	PAC-SG79RJ-B-E	PAC-SG80RJ-B-E	PAC-SG77RJ-B-E	PAC-SG76RJ-B-E		
PAC-MK33BC (Flare)	●	●	●	●	●	●	●							
PAC-MK53BC (Flare)	●	●	●	●	●	●	●							
PAC-MK33BCB (Brazing)	●	●						●	●	●	●	●		
PAC-MK53BCB (Brazing)	●	●						●	●	●	●	●		

208


External Dimensions

M SERIES

Unit : mm


MSZ-LN25VG2(W)(V)(R)(B) MSZ-LN35VG2(W)(V)(R)(B)
MSZ-LN50VG2(W)(V)(R)(B) MSZ-LN60VG2(W)(V)(R)(B)

INDOOR UNIT

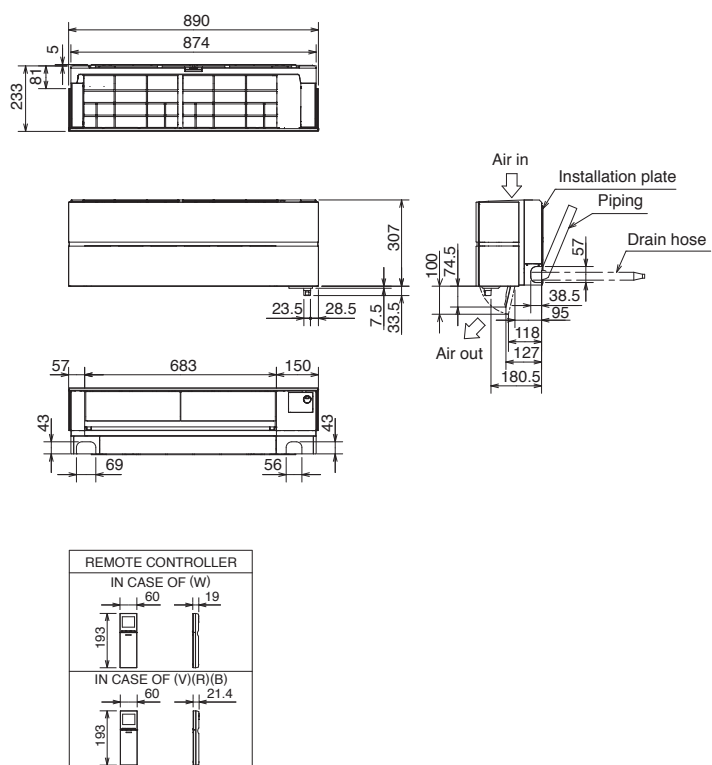


MSZ-AP15VG MSZ-AP20VG

INDOOR UNIT

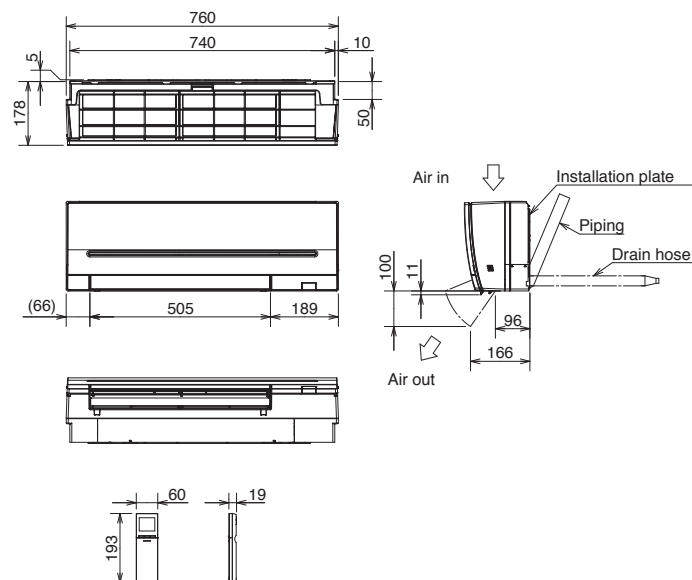


MSZ-AP25VG MSZ-AP35VG MSZ-AP42VG MSZ-AP50VG
MSZ-AP25VGK MSZ-AP35VGK MSZ-AP42VGK MSZ-AP50VGK


INDOOR UNIT

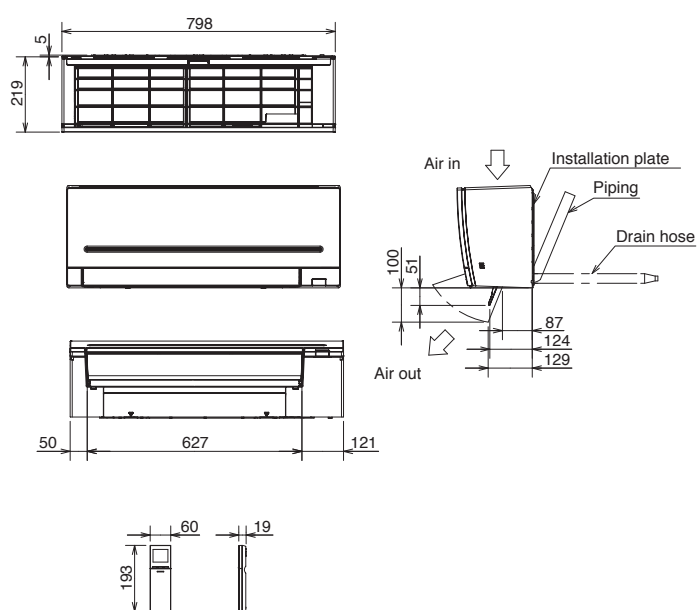




MSZ-AP60VG MSZ-AP71VG
MSZ-AP60VGK MSZ-AP71VGK

INDOOR UNIT

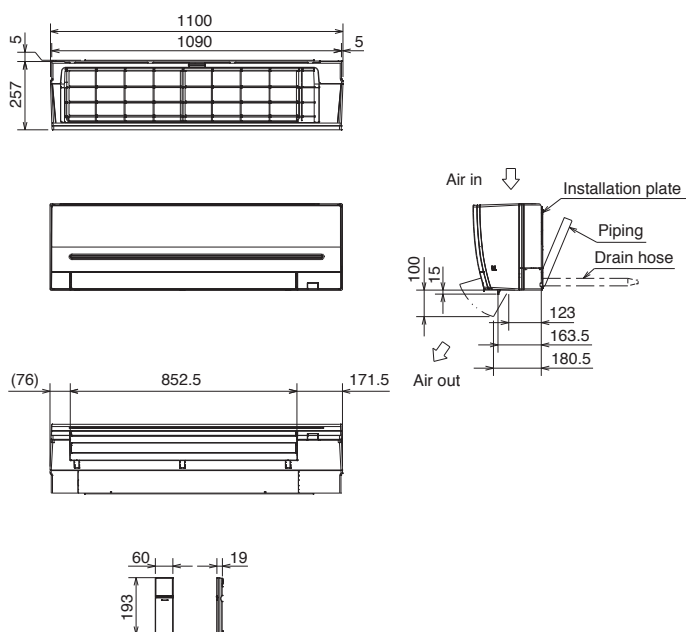

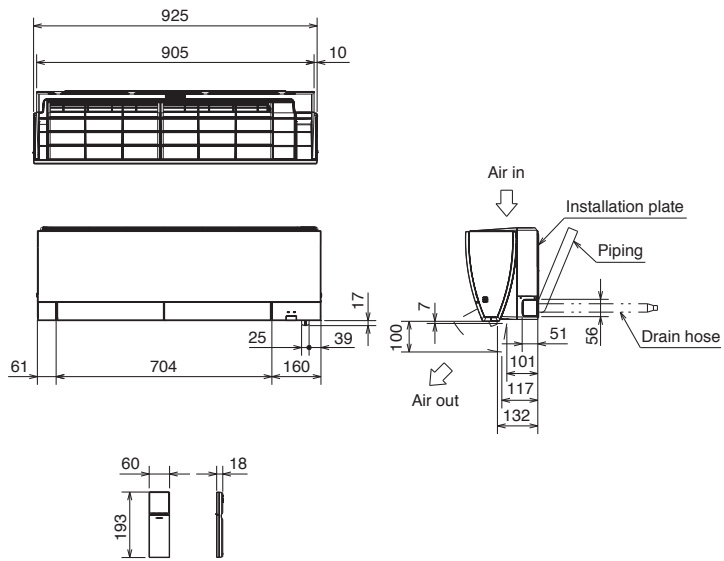
MSZ-FH25VE2 MSZ-FH35VE2 MSZ-FH50VE2**INDOOR UNIT**

MSZ-EF18VG(W)(B)(S) MSZ-EF22VG(W)(B)(S)
 MSZ-EF25VG(W)(B)(S) MSZ-EF35VG(W)(B)(S)
 MSZ-EF42VG(W)(B)(S) MSZ-EF50VG(W)(B)(S)
 MSZ-EF18VGK(W)(B)(S) MSZ-EF22VGK(W)(B)(S)
 MSZ-EF25VGK(W)(B)(S) MSZ-EF35VGK(W)(B)(S)
 MSZ-EF42VGK(W)(B)(S) MSZ-EF50VGK(W)(B)(S)

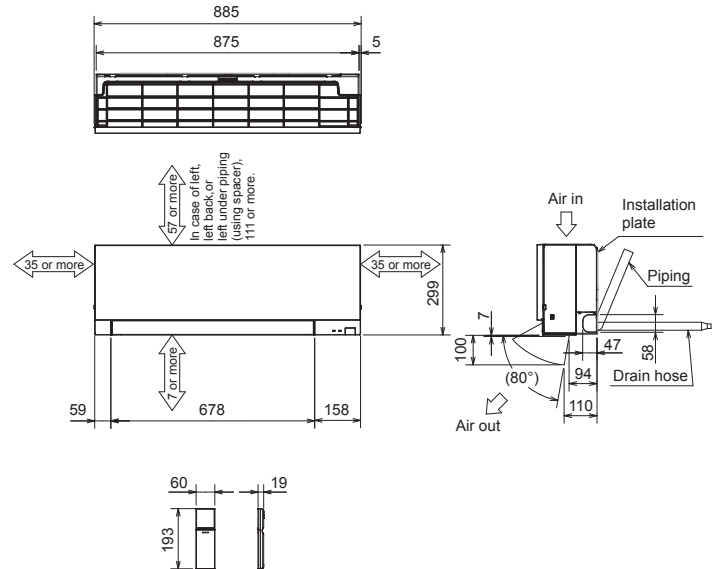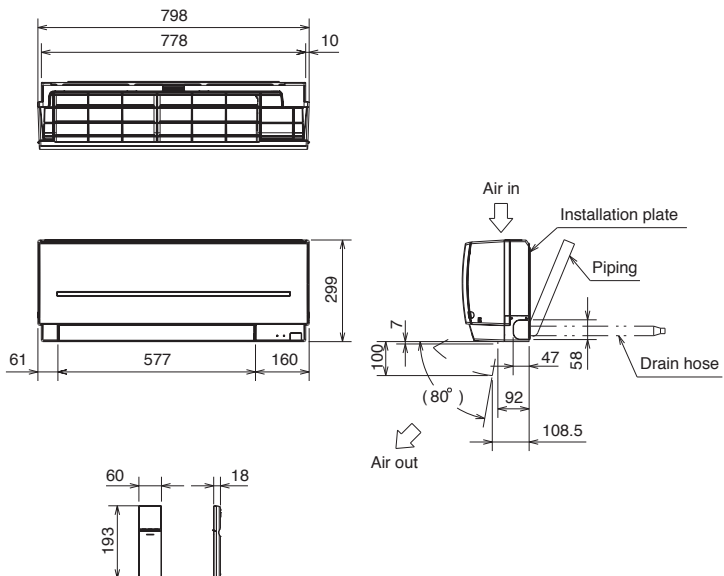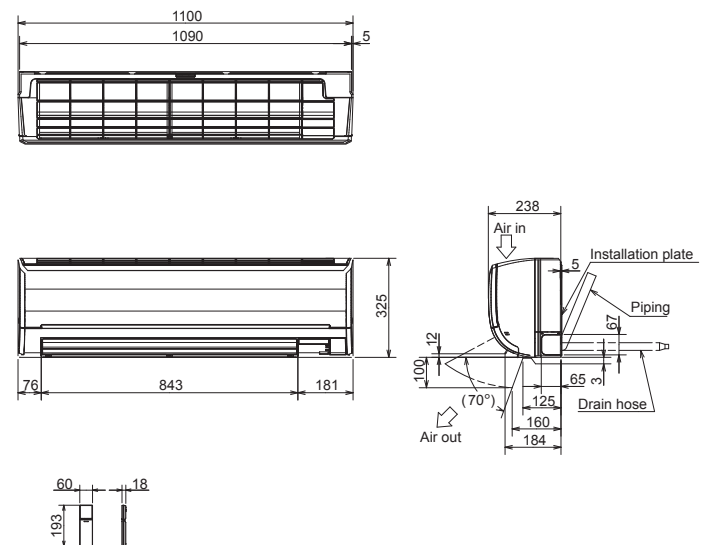INDOOR UNIT**MSZ-SF25VE3 MSZ-SF35VE3 MSZ-SF42VE3
MSZ-SF50VE3****INDOOR UNIT****MSZ-GF60VE2 MSZ-GF71VE2****INDOOR UNIT**


MSZ-BT20VG MSZ-BT25VG MSZ-BT35VG MSZ-BT50VG
MSZ-BT20VGK MSZ-BT25VGK MSZ-BT35VGK MSZ-BT50VGK

INDOOR UNIT

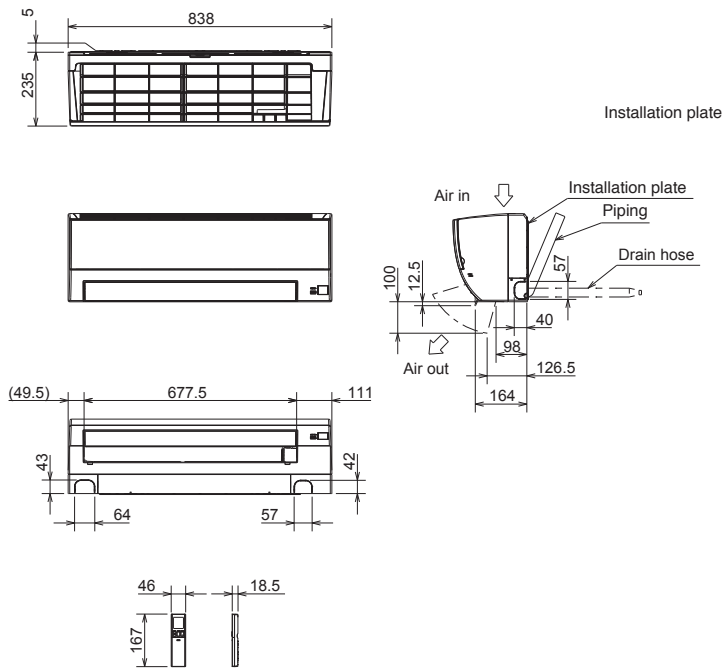


MSZ-WN25VA MSZ-WN35VA

INDOOR UNIT

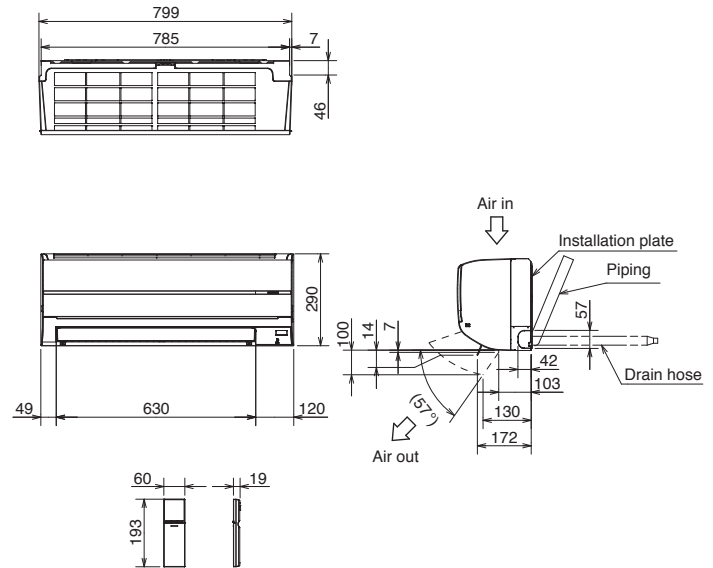


MSZ-DM25VA MSZ-DM35VA

INDOOR UNIT

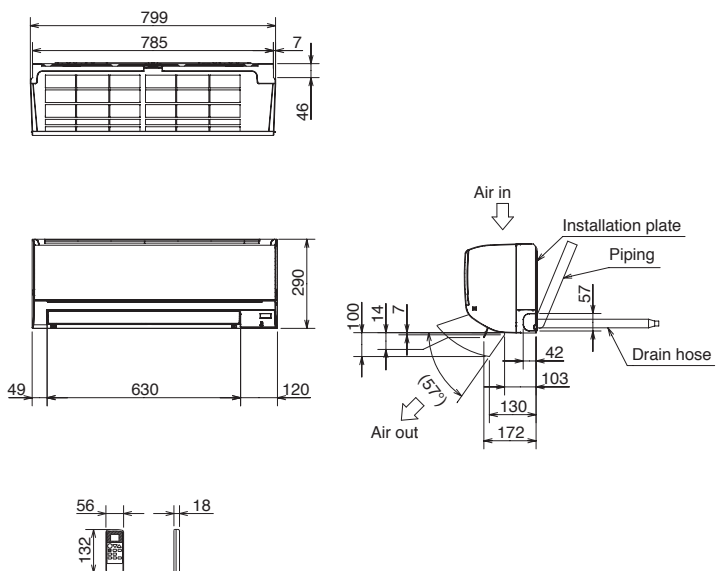







MSZ-HJ25VA MSZ-HJ35VA MSZ-HJ50VA

INDOOR UNIT

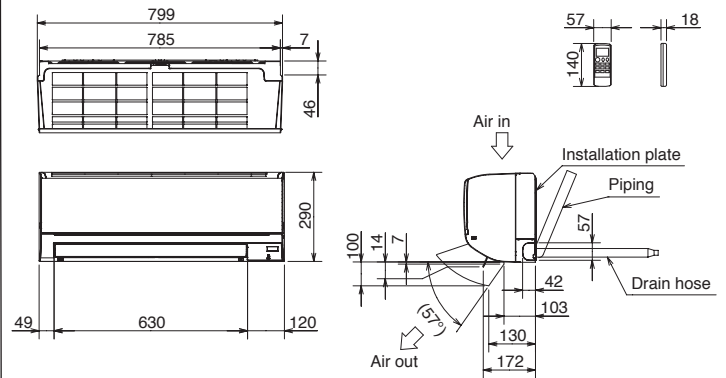


MSZ-HJ60VA MSZ-HJ71VA
MSY-TP35VF MSY-TP50VF

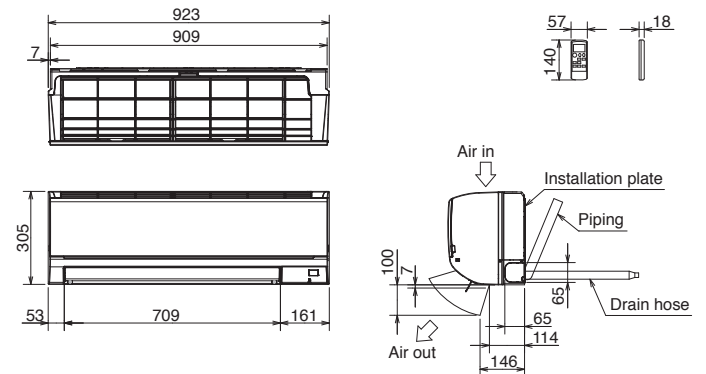

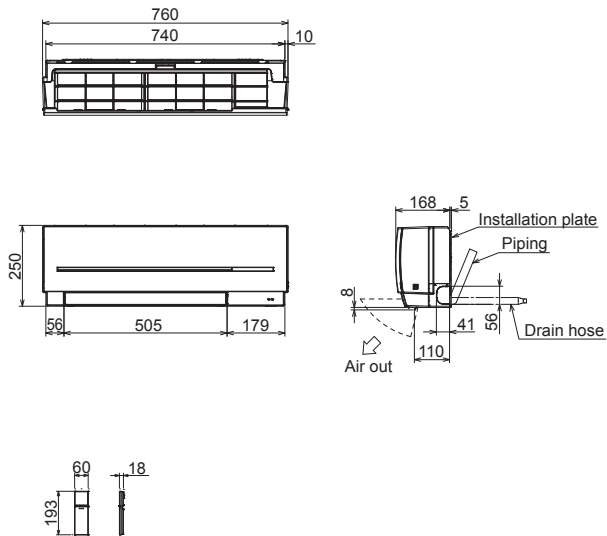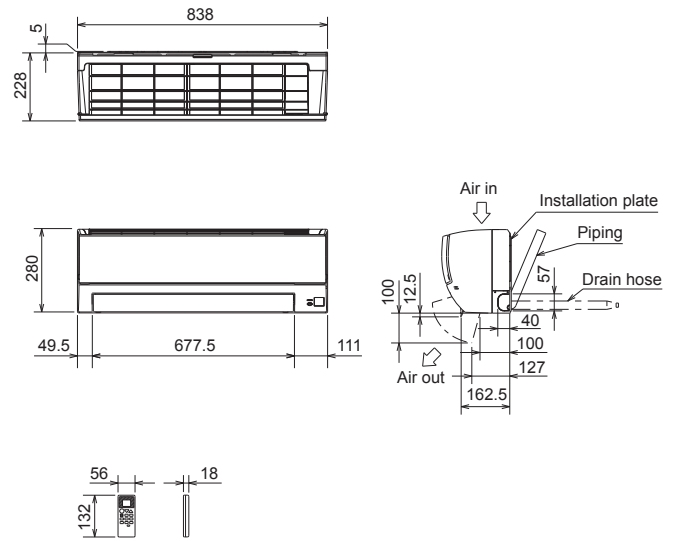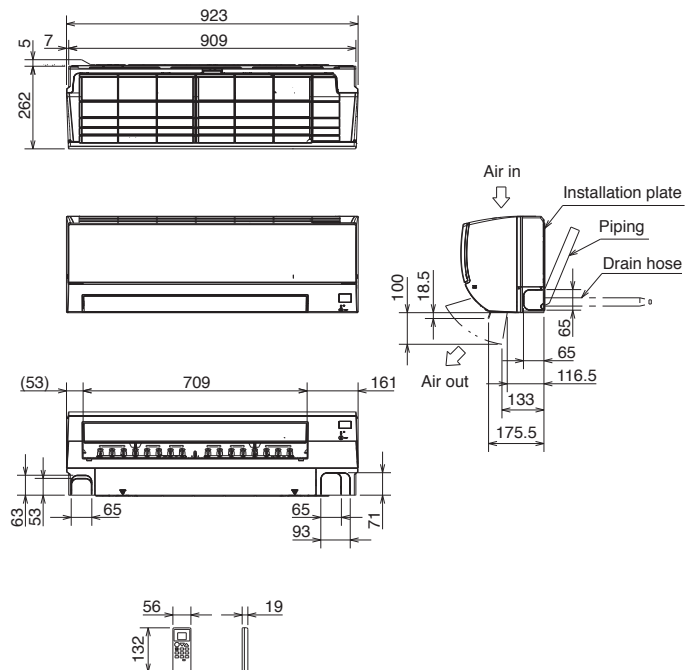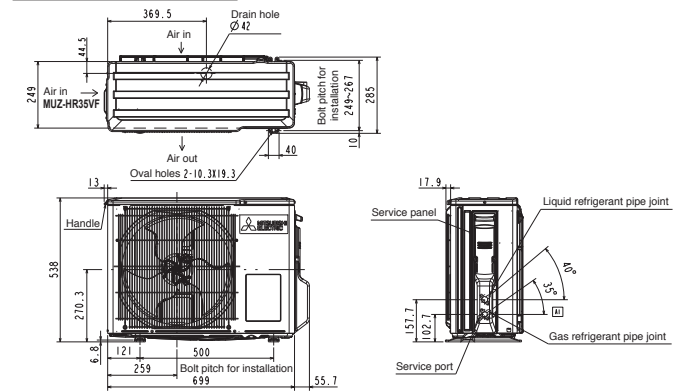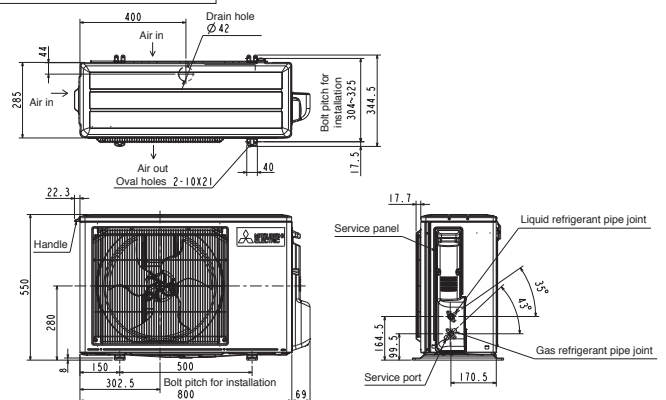MSZ-SF15VA MSZ-SF20VA**INDOOR UNIT****MSZ-HR25VF MSZ-HR35VF MSZ-HR42VF
MSZ-HR50VF****INDOOR UNIT****MSZ-HR60VF MSZ-HR71VF****INDOOR UNIT****MUZ-HR25VF MUZ-HR35VF
MUZ-BT20VG MUZ-BT25VG MUZ-BT35VG****OUTDOOR UNIT****MUZ-HR42VF MUZ-HR50VF****OUTDOOR UNIT**


MFZ-KT25VG MFZ-KT35VG MFZ-KT50VG MFZ-KT60VG

INDOOR UNIT

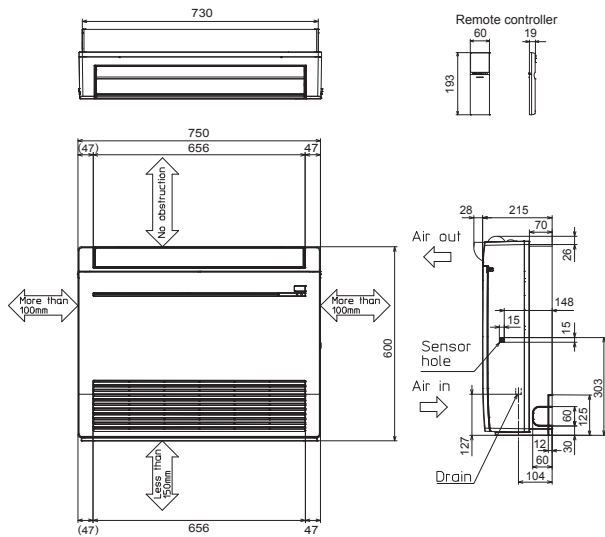

MFZ-KJ25VE2 MFZ-KJ35VE2 MFZ-KJ50VE2

INDOOR UNIT

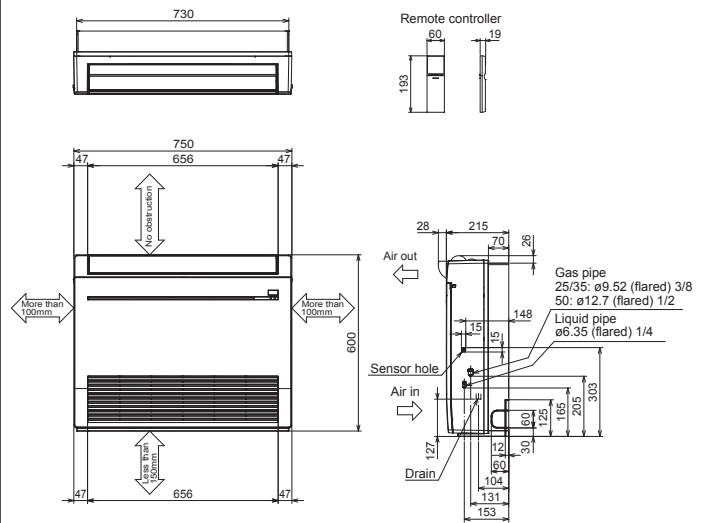


MLZ-KP25VF MLZ-KP35VF MLZ-KP50VF


INDOOR UNIT

INDOOR UNIT OUTLINE DRAWING

(TOP VIEW)

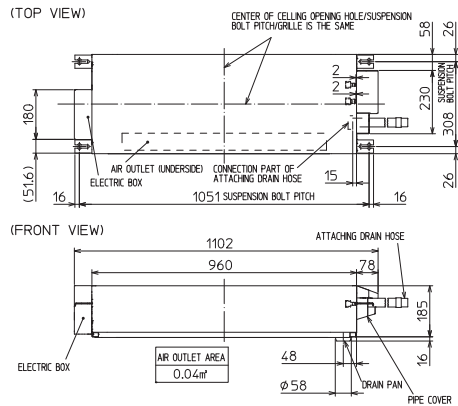


REMOTE CONTROLLER OUTLINE DRAWING

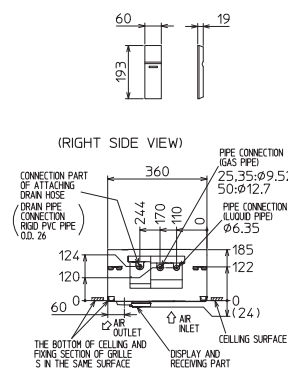


INDOOR UNIT DETAIL VIEW

(TOP VIEW)

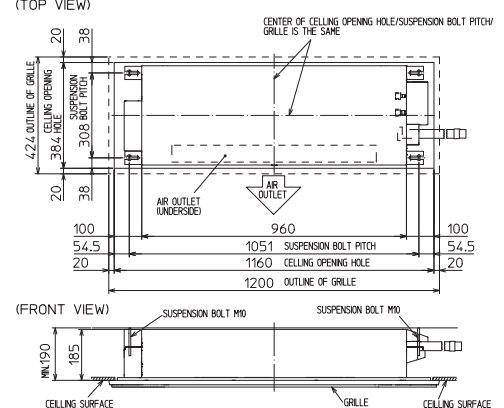

GRILLE OUTLINE DRAWING


(MLP-444W)

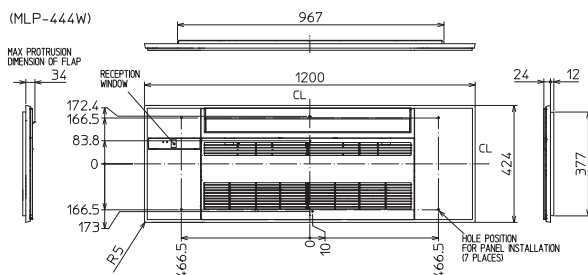

		KP25/35VF	KP50VF
EXTENSION PIPE	LIQUID PIPE O.D.	ø6.35	
	GAS PIPE O.D.	ø9.52	ø12.7
CONNECTION OF PIPE	LIQUID PIPE	FLARED CONNECTION ø6.35	
	GAS PIPE	FLARED CONNECTION ø9.52	FLARED CONNECTION ø12.7
DRAIN HOSE		HEAT INSULATOR O.D. CONNECTION Ø25 EFFECTIVE LENGTH ø32 480	
DRAIN PIPE CONNECTION		RIGID PVC PIPE O.D. 26	


NOTE1, CUTTING ATTACHING DRAIN HOSE CAN BE USED

THE METHOD FOR STANDING
DRAIN FROM INDOOR UNIT
※ CUTTING ATTACHING DRAIN
HOSE CAN BE USED




MUZ-LN25VG MUZ-LN25VGHZ MUZ-BT20VG
 MUZ-LN35VG MUZ-LN35VGHZ MUZ-BT25VG
 MUZ-AP20VG MUZ-AP25VG MUZ-BT35VG
 MUZ-AP35VG MUZ-AP35VGH MUZ-BT50VG
 MUZ-AP42VG MUZ-AP42VGH MUZ-HR42VF
 MUZ-FH25VE MUZ-FH35VE MUZ-HR50VF
 MUZ-FH25VEHZ MUZ-FH35VEHZ
 MUZ-EF25VG MUZ-EF25VGH
 MUZ-EF35VG MUZ-EF35VGH
 MUZ-EF42VG MUZ-TP35VF
 MUZ-SF25VE MUZ-SF25VEH
 MUZ-SF35VEH MUZ-SF42VE
 MUZ-HJ50VA MUZ-TP50VF
 MUFZ-KJ25VE MUZ-SF35VE
 MUFZ-KJ25VEHZ MUZ-SF42VEH
 MUFZ-KJ35VE
 MUFZ-KJ35VEHZ

OUTDOOR UNIT

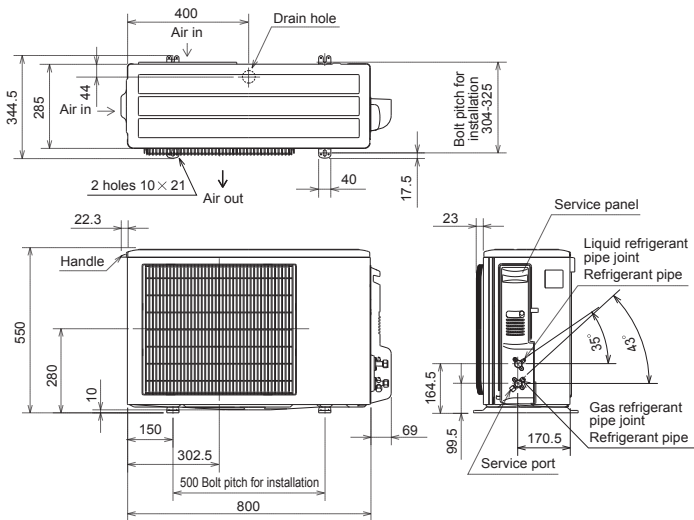


MUZ-LN50VGHZ MUZ-LN60VG
 MUZ-FH50VE MUZ-FH50VEHZ
 MUZ-SF50VE MUZ-SF50VEH
 MUZ-GF60VE MUZ-GF71VE
 MUZ-HJ60VA MUZ-HJ71VA
 MUFZ-KJ50VE MUFZ-KJ50VEHZ

OUTDOOR UNIT

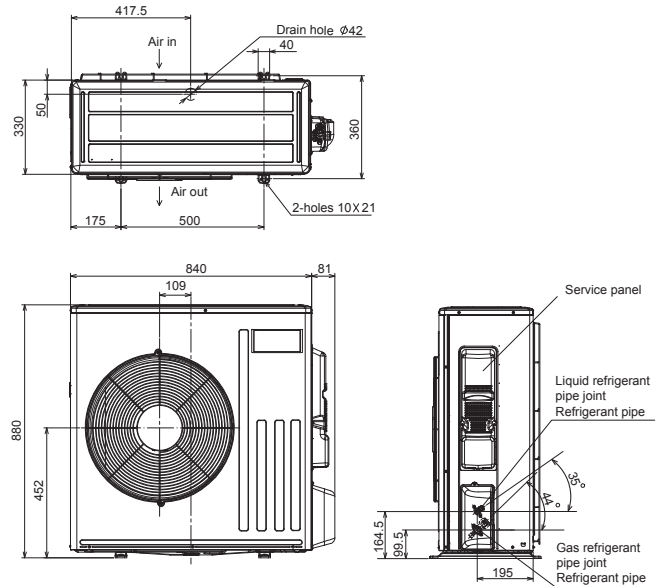


MUZ-WN25VA MUZ-WN35VA MUZ-HR25VF
 MUZ-DM25VA MUZ-DM35VA MUZ-HR35VF
 MUZ-HJ25VA MUZ-HJ35VA

OUTDOOR UNIT

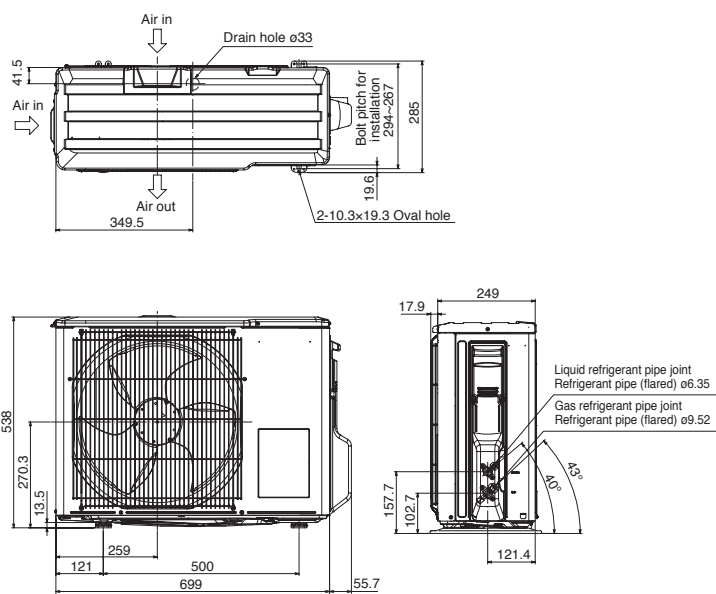


MUZ-LN50VG MUZ-AP60VG
 MUZ-AP50VG MUZ-AP50VGH
 MUZ-EF50VG MUZ-HR60VF
 MUZ-HR71VF



OUTDOOR UNIT

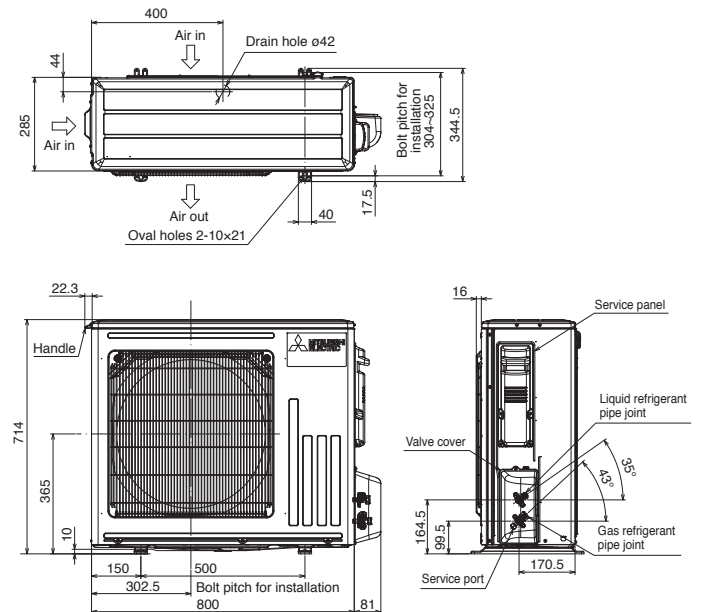


INDOOR UNIT

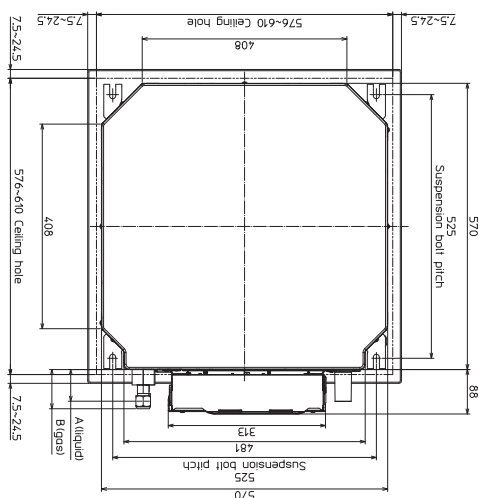

Models	① Refrigerant pipe (liquid)	② Refrigerant pipe (gas)	A	B
SLZ-M15FA SLZ-M25FA SLZ-M35FA	φ 6.35mm flared connection 1/4F	φ 9.52mm flared connection 3/8F	63mm	72mm
SLZ-M50FA	φ 6.35mm flared connection 1/4F	φ 12.7mm flared connection 1/2F	63mm	78mm
SLZ-M60FA	φ 6.35mm flared connection 1/4F	φ 15.88mm flared connection 5/8F	63mm	78mm

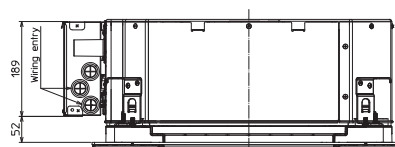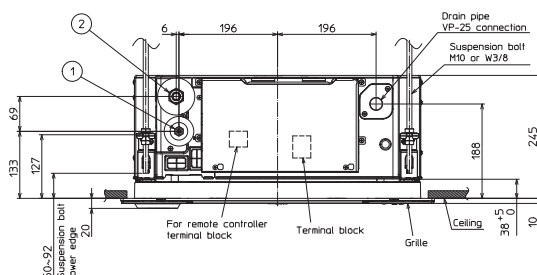

INDOOR UNIT


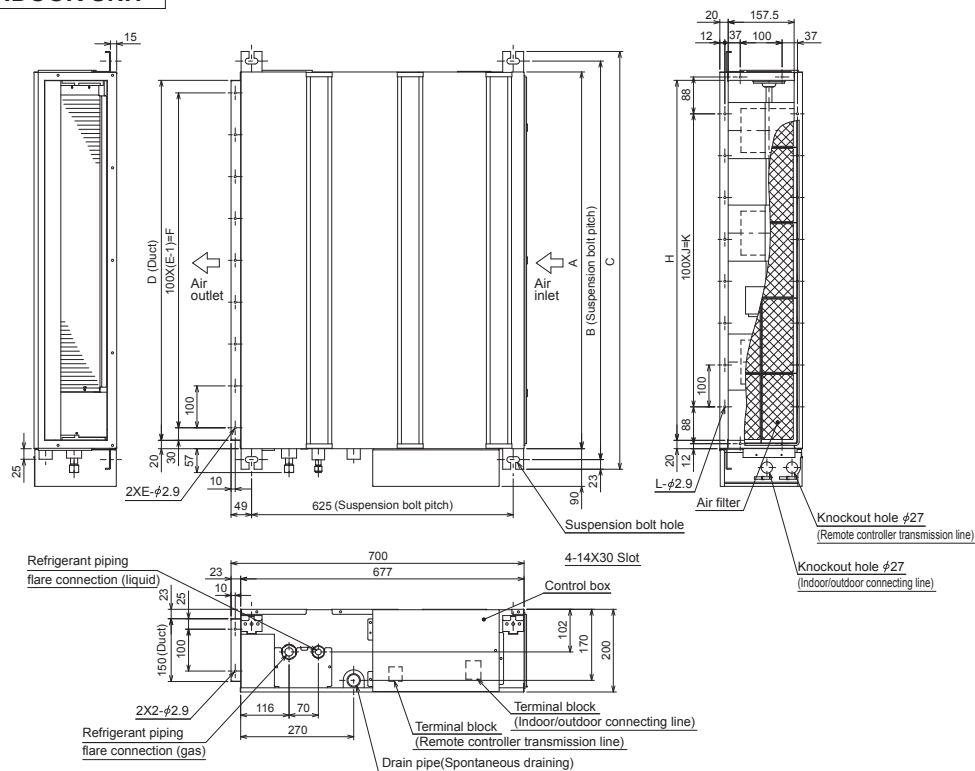


Model	A	B	C	D	E	F	G	H	J	K	L
SEZ-M25DAL/DA	700	752	798	660	7	600	800	660	5	500	16
SEZ-M35DAL/DA	900	952	998	860	9	800	1000	860	7	700	20
SEZ-M50DAL/DA											
SEZ-M60DAL/DA	1100	1152	1198	1060	11	1000	1200	1060	9	900	24
SEZ-M71DAL/DA											

1. Use M10 bolts for suspension (purchase locally).
2. Keep service space for maintenance at the bottom.
3. This chart is based on the SEZ-M50DAL/DA, which has three fans.
SEZ-M25, 35DAL/DA has two fans, and SEZ-M60, 71DAL/DA has four fans.
4. If an inlet duct is used, remove the air filter supplied with the unit, and install a locally purchased filter on the suction side.



SUZ-M25VA SUZ-M35VA

OUTDOOR UNIT

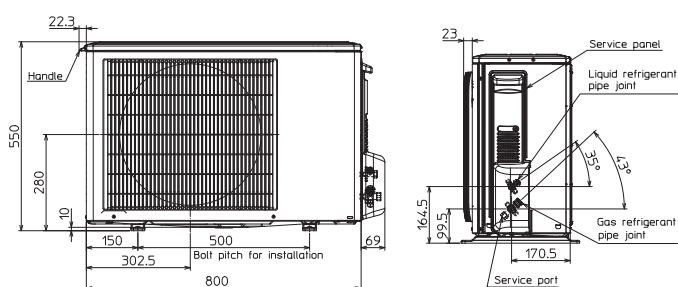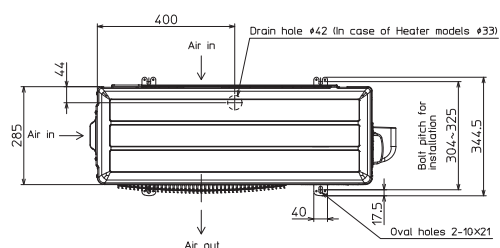



SUZ-M50VA

OUTDOOR UNIT

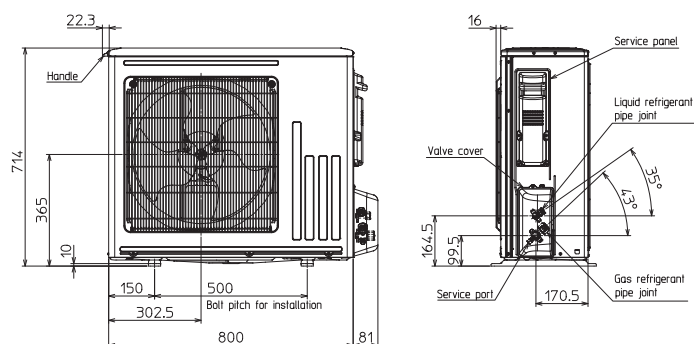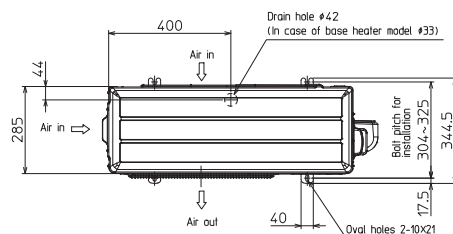


SUZ-M60VA SUZ-M71VA

INDOOR UNIT

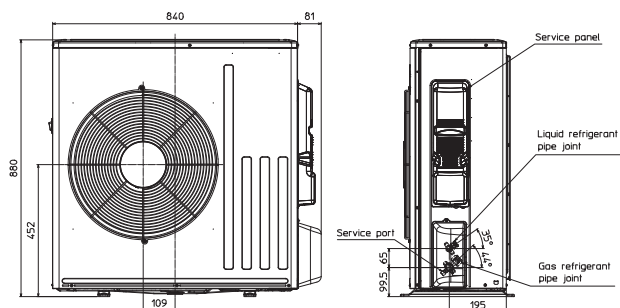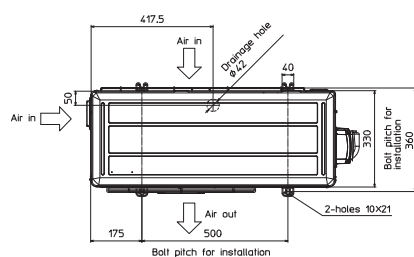


SUZ-KA25VA6 SUZ-KA35VA6

INDOOR UNIT

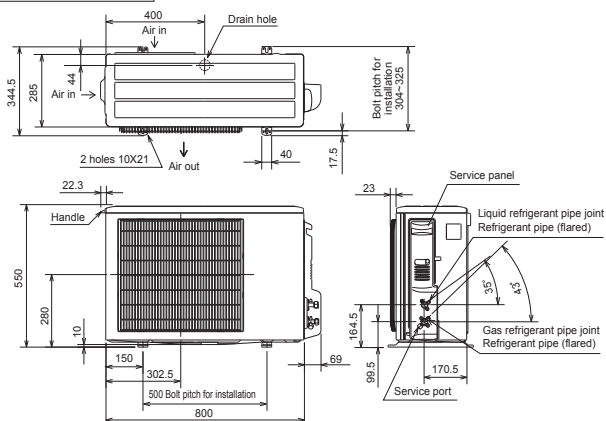

SUZ-KA50VA6 SUZ-KA60VA6 SUZ-KA71VA6

INDOOR UNIT

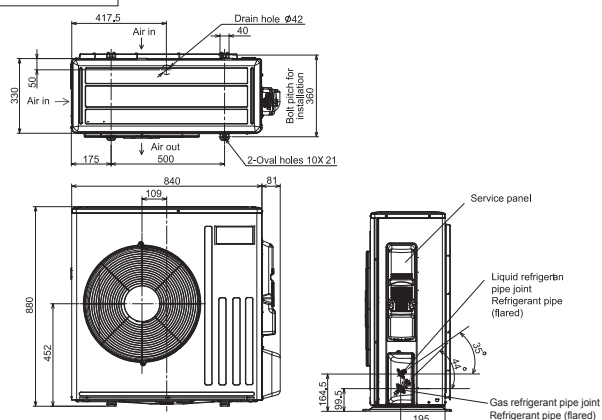


PLA-ZM35EA PLA-ZM50EA PLA-ZM60EA PLA-ZM71EA
 PLA-ZM100EA PLA-ZM125EA PLA-ZM140EA
 PLA-M35EA PLA-M50EA PLA-M60EA PLA-M71EA
 PLA-M100EA PLA-M125EA PLA-M140EA

INDOOR UNIT


PLA-ZM35EA/50EA/71EA/100EA/125EA/140EA
 PLA-M35EA/50EA/71EA/100EA/125EA/140EA

ZM	①	②	A	B	C	D	E	F
35/50	REFRIGERANT PIPE Ø6.35 FLARED CONNECTION 1/2"	REFRIGERANT PIPE Ø12.7 FLARED CONNECTION 1/2"						
60	REFRIGERANT PIPE Ø6.35 FLARED CONNECTION 3/8"	REFRIGERANT PIPE Ø12.7 FLARED CONNECTION 3/8"	241	258	76	76.5	365 OR MORE	3500 OR LESS
71					79.5	79.5		
100-140			281	298			305 OR MORE	4000 OR LESS

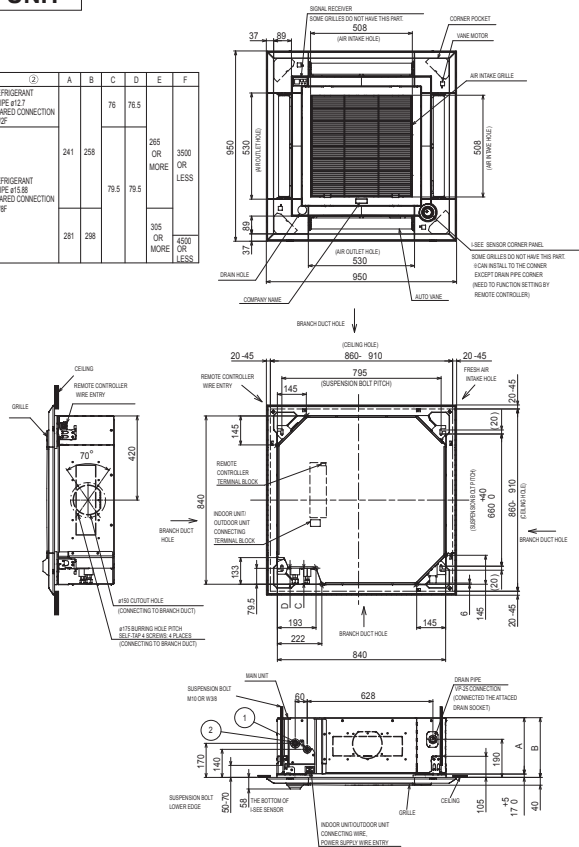


PKA-M35HA(L) PKA-M50HA(L)

INDOOR UNIT

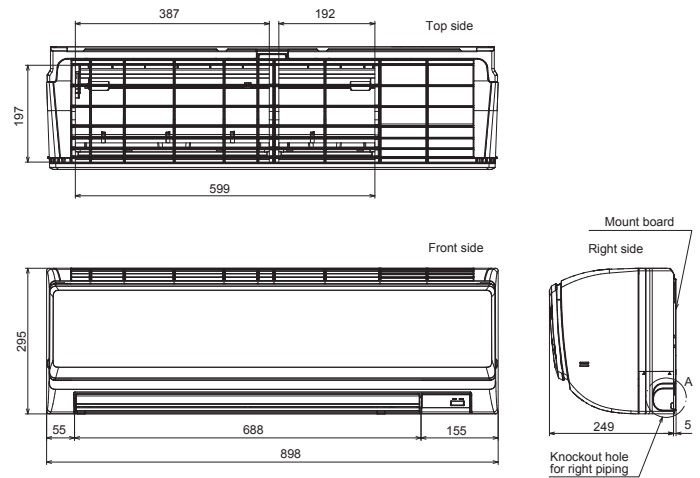


PKA-M60KA(L) PKA-M71KA(L) PKA-M100KA(L)

INDOOR UNIT

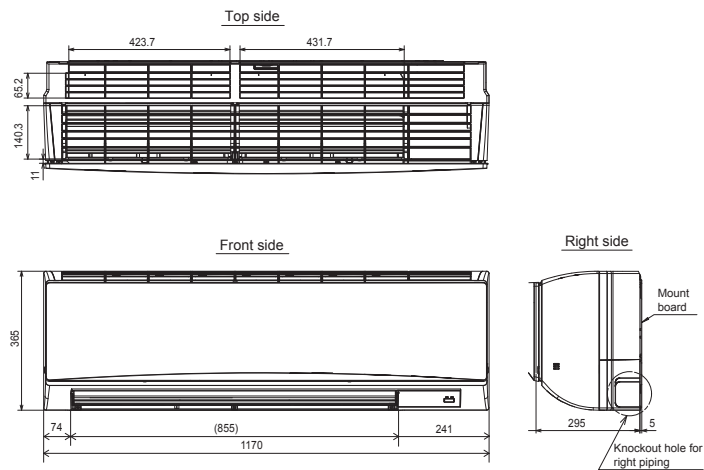

PCA-M35KA PCA-M50KA

INDOOR UNIT

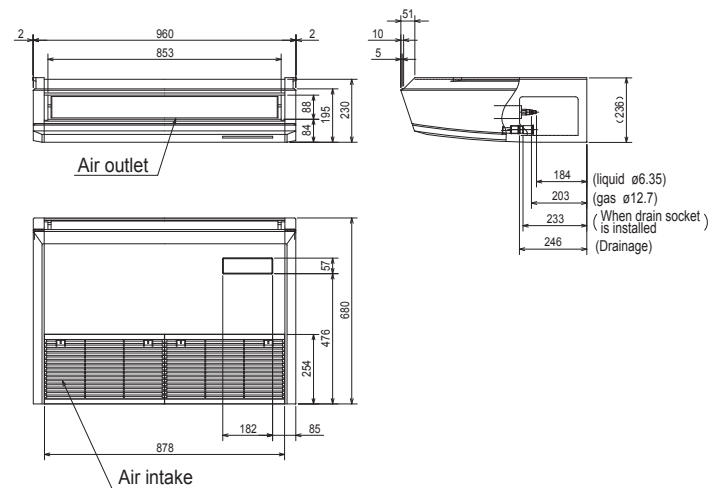


NOTES.

1. Use M10 or W3/8 screw for anchor bolt.
2. Please be sure when installing the drain pump (option parts), refrigerant pipe will be only upward.

PCA-M60KA PCA-M71KA

INDOOR UNIT

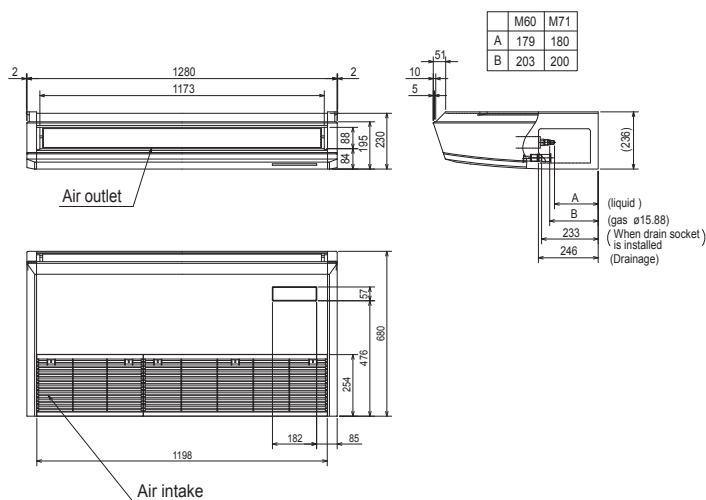


NOTES.

- NOTES:
1. Use M10 or W3/8 screw for anchor bolt.
 2. Please be sure when installing the drain pump (option parts), refrigerant pipe will be only upward.

Use the current nuts meeting the pipe size of the outdoor unit.
Available pipe size

PCA-M100KA PCA-M125KA PCA-M140KA

INDOOR UNIT

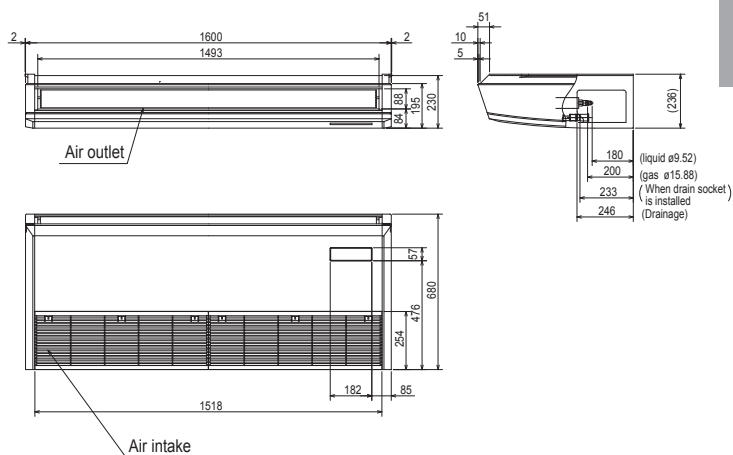


NOTES.

- NOTES:
1. Use M10 or W3/8 screw for anchor bolt.
 2. Please be sure when installing the drain pump (option parts), refrigerant pipe will be only upward.

PCA-M71HA


INDOOR UNIT

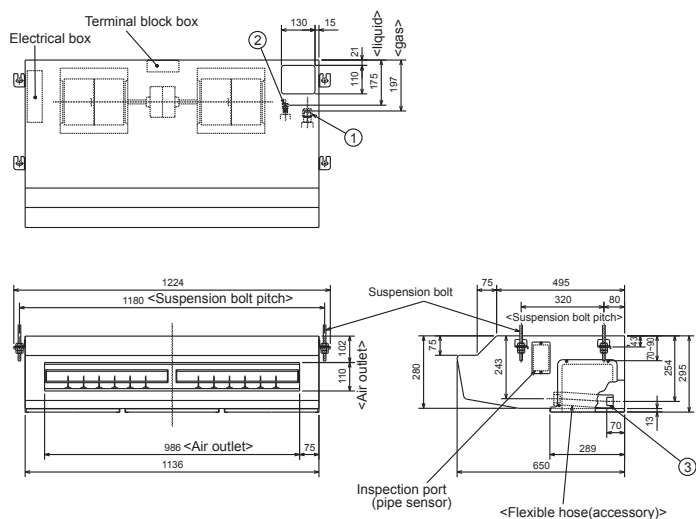

- ①Refrigerant pipe connection(gas pipe side/flared connection)
- ②Refrigerant pipe connection(liquid pipe side/flared connection)
- ③Flexible hose(accessory) → Drainage pipe connection


PSA-RP71KA PSA-RP100KA PSA-RP125KA PSA-RP140KA

INDOOR UNIT

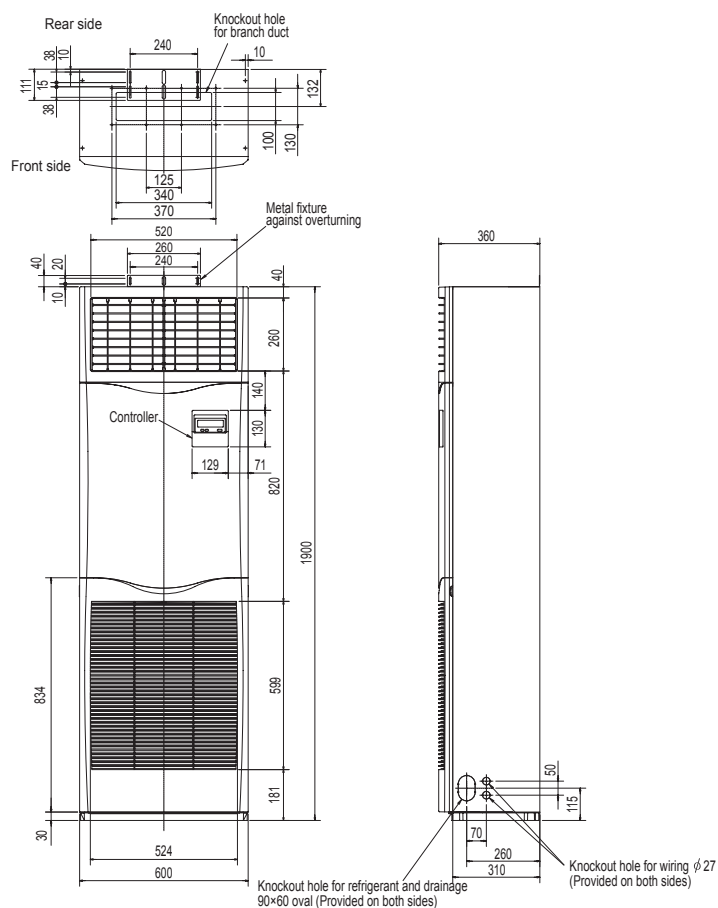

PUZ-ZM200YKA PUHZ-ZM250YKA

OUTDOOR UNIT

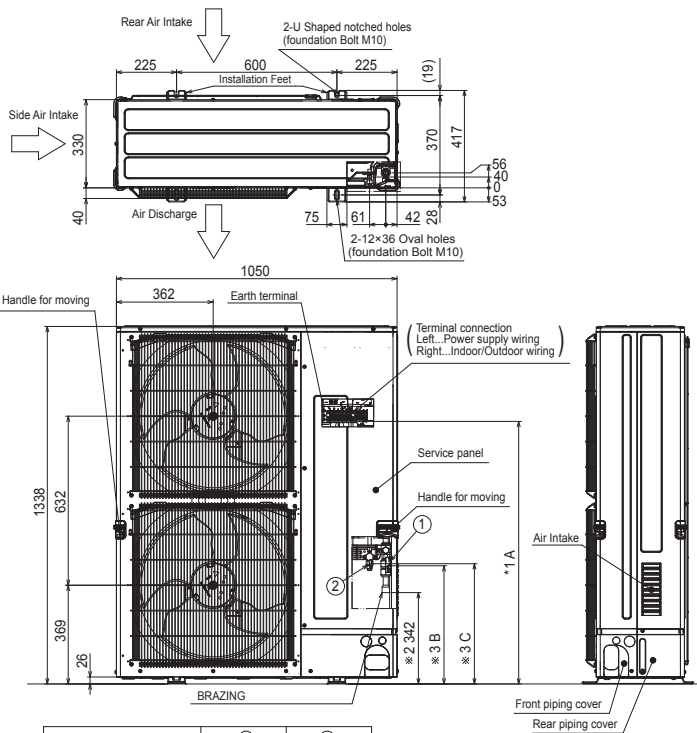


Model	① Refrigerant GAS pipe connection	② Refrigerant LIQUID pipe connection
PUZ-ZM/M200YKA.UK	ø19.05 (3/4F)	ø9.52 (3/8F)
PUZ-ZM/M250YKA.UK	ø19.05 (3/4F)	ø12.7 (1/2F)

Model	A	B	C	
PUZ-ZM/M200,250YKA.UK	985	442	450	※ 1...Indication of Terminal connection location. ※ 2...Refrigerant GAS PIPE connection (BRAZING) O.Dø25.4. ※ 3...Indication of STOP VALVE connection location.

PUHZ-ZRP200YKA3 PUHZ-ZRP250YKA3

OUTDOOR UNIT

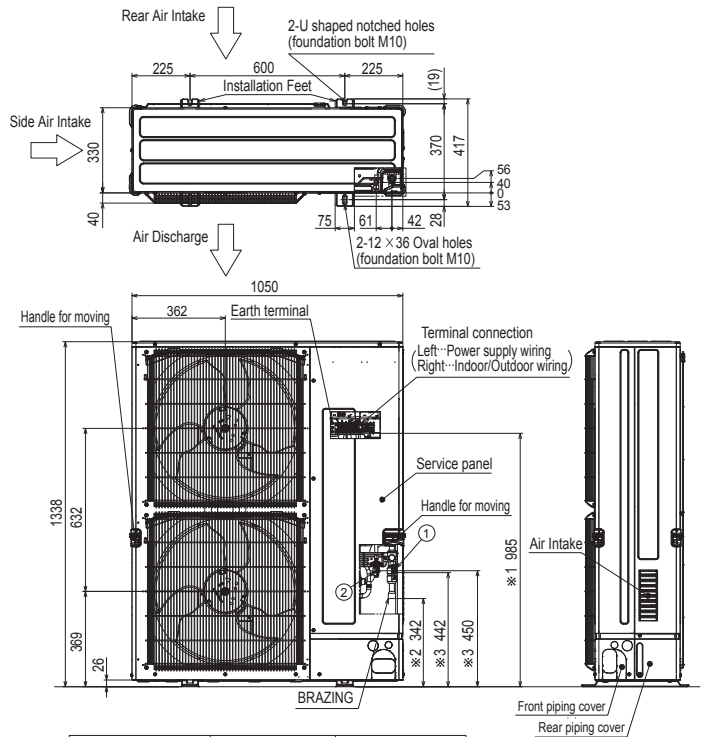


Model	① Refrigerant GAS pipe connection	② Refrigerant LIQUID pipe connection
PUHZ-ZRP200YKA3	ø19.05 (3/4F)	ø9.52 (3/8F)
PUHZ-ZRP250YKA3	ø19.05 (3/4F)	ø12.7 (1/2F)

- *1---Indication of Terminal connection location.
- *2---Refrigerant GAS pipe connection (BRAZING) O.Dø25.4.
- *3---Indication of STOP VALVE connection location.

PUZ-M100VKA PUZ-M100YKA
PUZ-M125VKA PUZ-M125YKA
PUZ-M140VKA PUZ-M140YKA

OUTDOOR UNIT

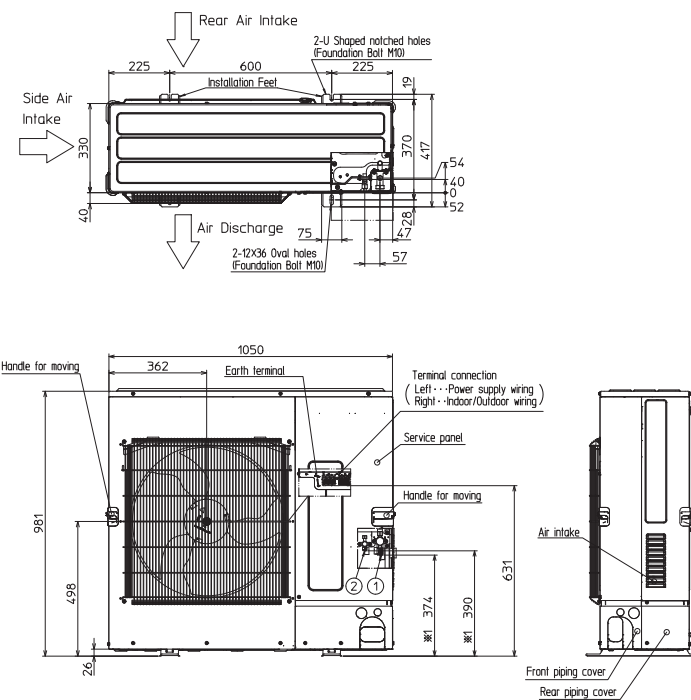


Example Of Notes


- ①...Refrigerant GAS pipe connection (FLARE) Ø15.88 (5/8F)
②...Refrigerant LIQUID pipe connection (FLARE) Ø9.52 (3/8F)
※1...Indication of STOP VALVE connection location.

PUHZ-P100VKA	PUHZ-P100YKA
PUHZ-P125VKA	PUHZ-P125YKA
PUHZ-P140VKA	PUHZ-P140YKA

OUTDOOR UNIT

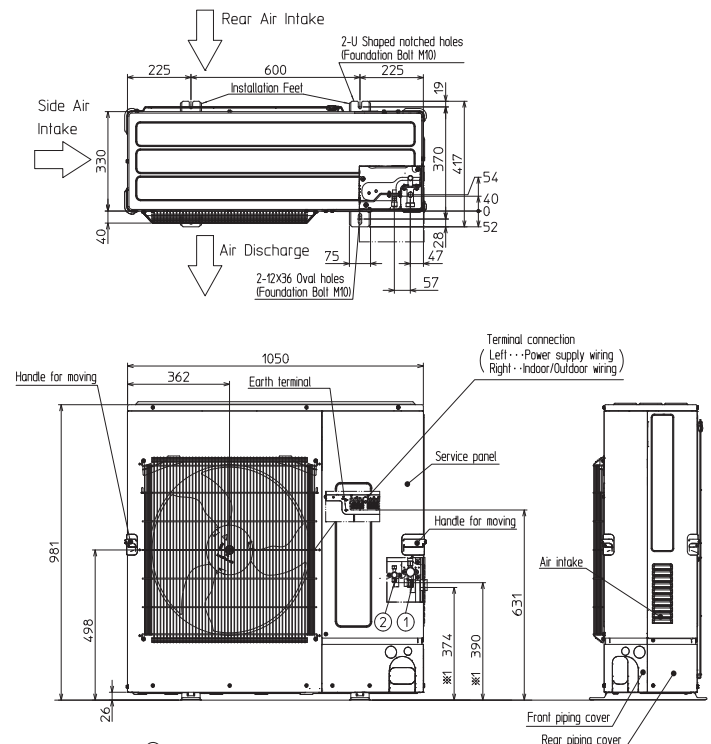


- ①...Refrigerant GAS pipe connection (FLARE) Ø15.88 (5/8F)
 ②...Refrigerant LIQUID pipe connection (FLARE) Ø9.52 (3/8F)
 ※1...Indication of STOP VALVE connection location.

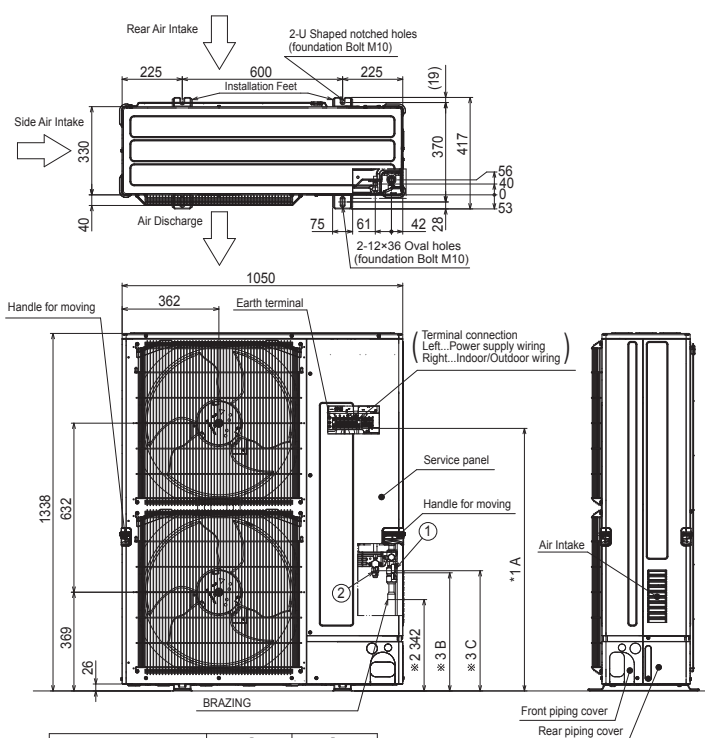PUZ-M200YKA PUZ-M250YKA**OUTDOOR UNIT**

Model	① Refrigerant GAS pipe connection	② Refrigerant LIQUID pipe connection
PUZ-ZM/M200YKA-UK	ø19.05 (3/4F)	ø9.52 (3/8F)
PUZ-ZM/M250YKA-UK	ø19.05 (3/4F)	ø12.7 (1/2F)

Model	A	B	C	
PUZ-ZM/M200,250YKA-UK	985	442	450	*1...Indication of Terminal connection location. *2...Refrigerant GAS PIPE connection (BRAZING) O.D.ø25.4. *3...Indication of STOP VALVE connection location.

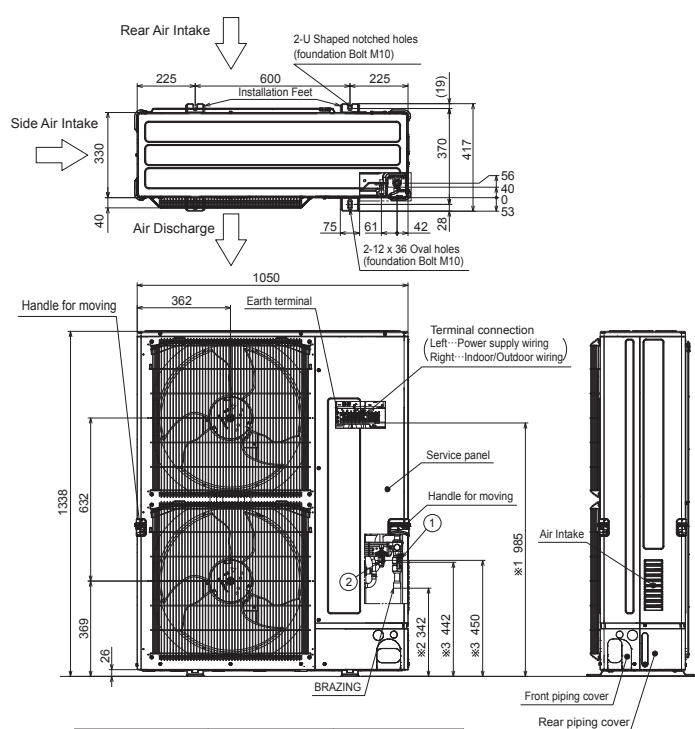PUHZ-P200YKA3 PUHZ-P250YKA3**OUTDOOR UNIT**


Model	① Refrigerant GAS pipe connection	② Refrigerant LIQUID pipe connection
PUHZ-P200YKA3	ø19.05 (3/4F)	ø9.52 (3/8F)
PUHZ-P250YKA3	ø19.05 (3/4F)	ø12.7 (1/2F)

*1--Indication of Terminal connection location.
 *2--Refrigerant GAS pipe connection (BRAZING) O.D.ø25.4.
 *3--Indication of STOP VALVE connection location.

MXZ SERIES


MXZ-2D33VA MXZ-2D42VA2 MXZ-2D53VA2 MXZ-2D53VAH2
MXZ-2DM40VA MXZ-2HA40VF MXZ-2HA50VF
MXZ-2F33VF3 MXZ-2F42VF3 MXZ-2F53VF3 MXZ-2F53VFH3

OUTDOOR UNIT

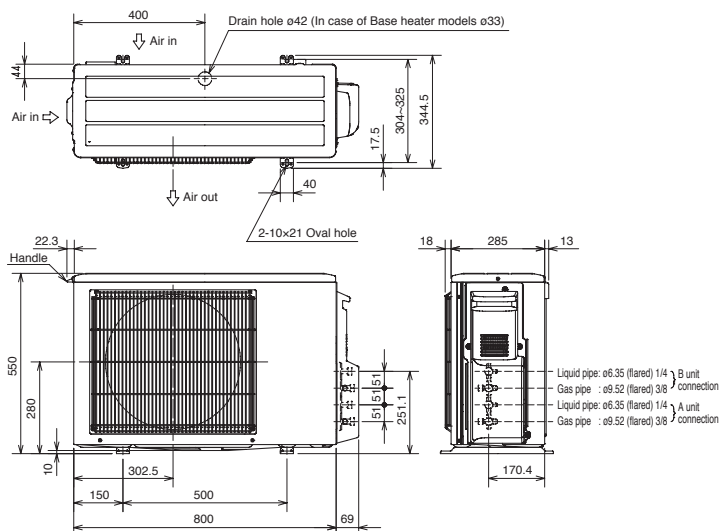


MXZ-2E53VAHZ

OUTDOOR UNIT

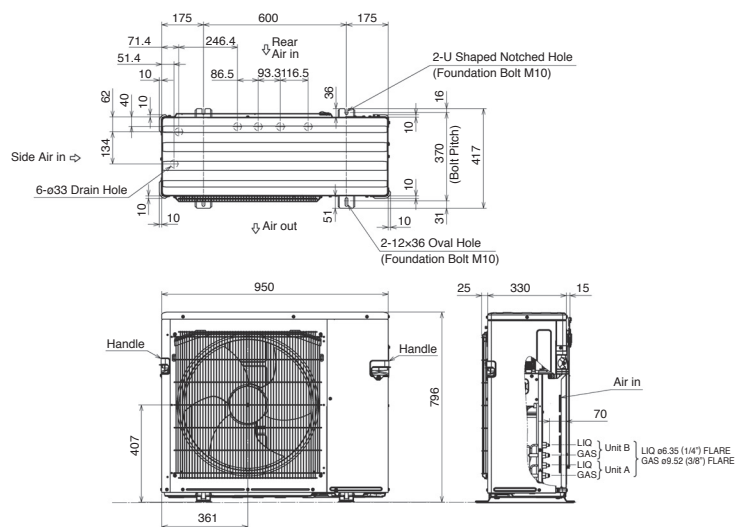


MXZ-3E54VA MXZ-3E68VA
MXZ-3DM50VA MXZ-3HA50VF
MXZ-3F54VF3 MXZ-3F68VF3




OUTDOOR UNIT

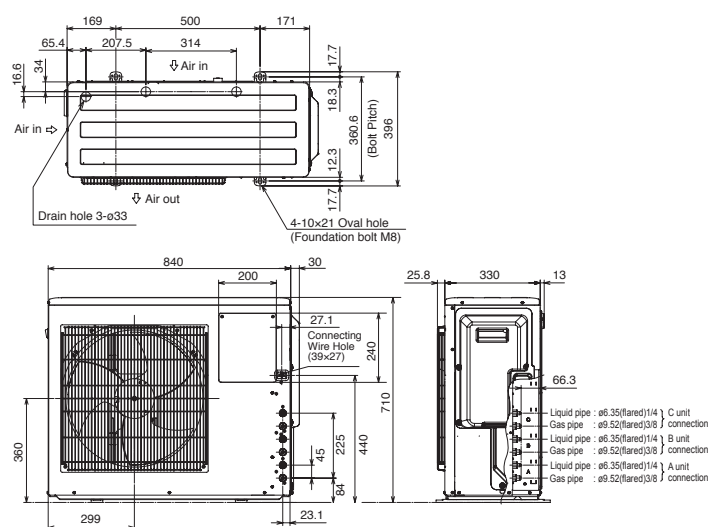

MXZ-4E72VA
MXZ-4F72VF3 MXZ-4F80VF3


OUTDOOR UNIT

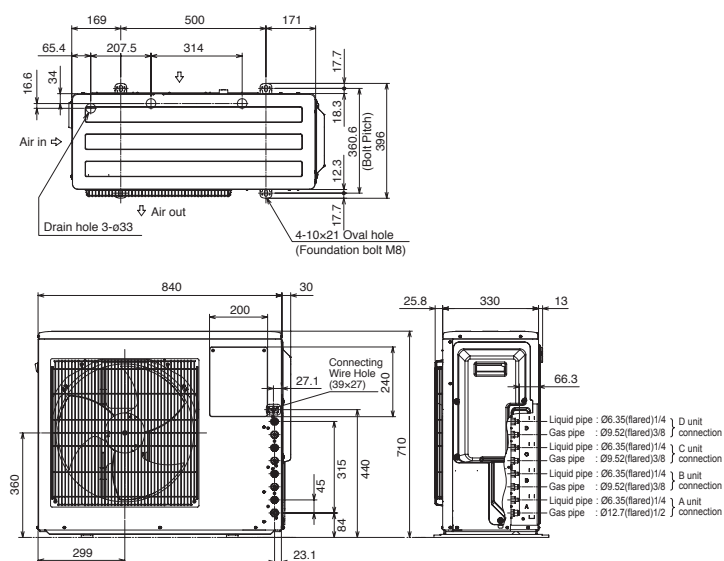

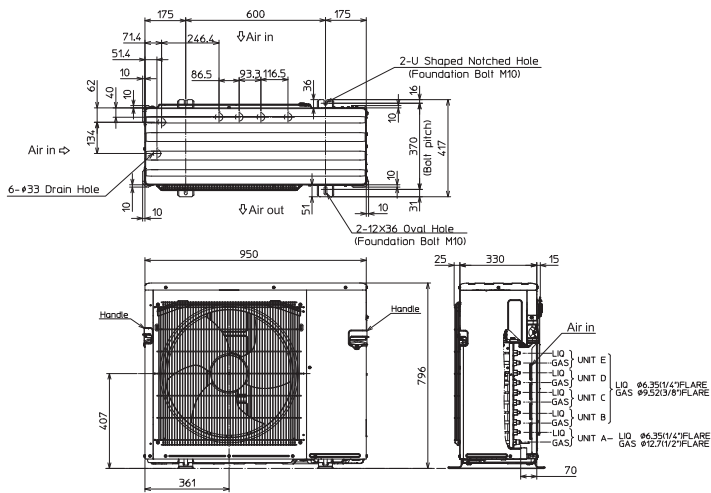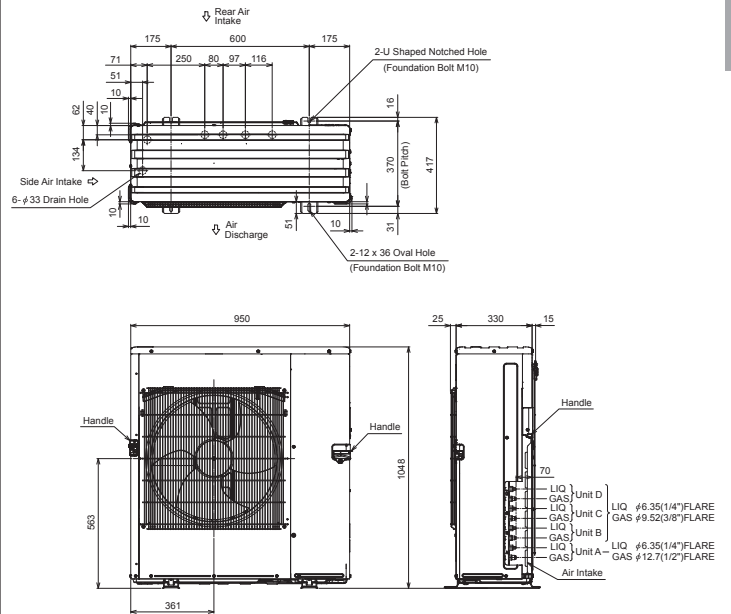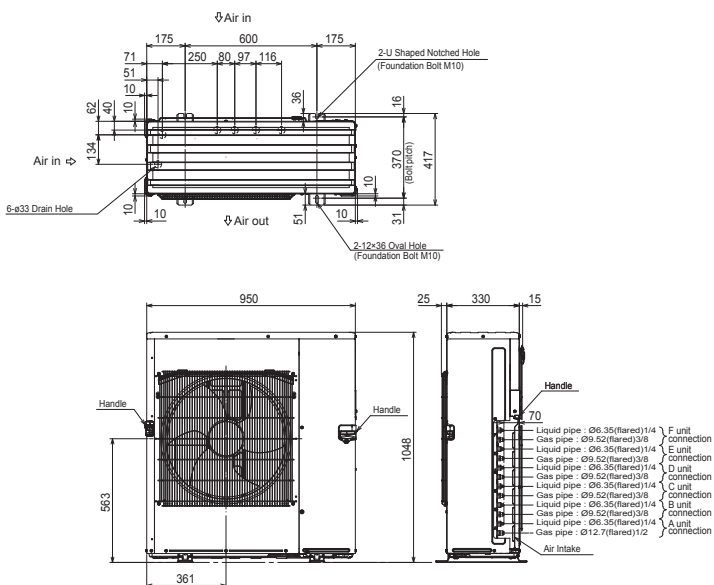MXZ-4E83VA MXZ-5E102VA**OUTDOOR UNIT****MXZ-4E83VAHZ****OUTDOOR UNIT****MXZ-6D122VA2****OUTDOOR UNIT**

PUMY-P112/125/140VKM4(-BS)

OUTDOOR UNIT

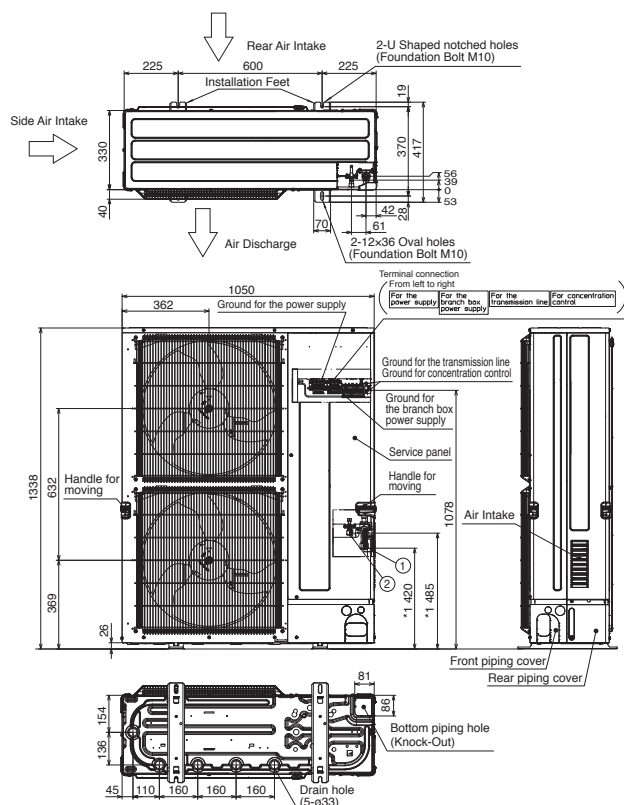


Example of Notes

- ①...Refrigerant GAS pipe connection (FLARE) φ15.88 (5/8F)
- ②...Refrigerant LIQUID pipe connection (FLARE) φ9.52 (3/8F)
- *1...Indication of STOP VALVE connection location.

PUMY-P112/125/140YKM(E)4(-BS)

OUTDOOR UNIT

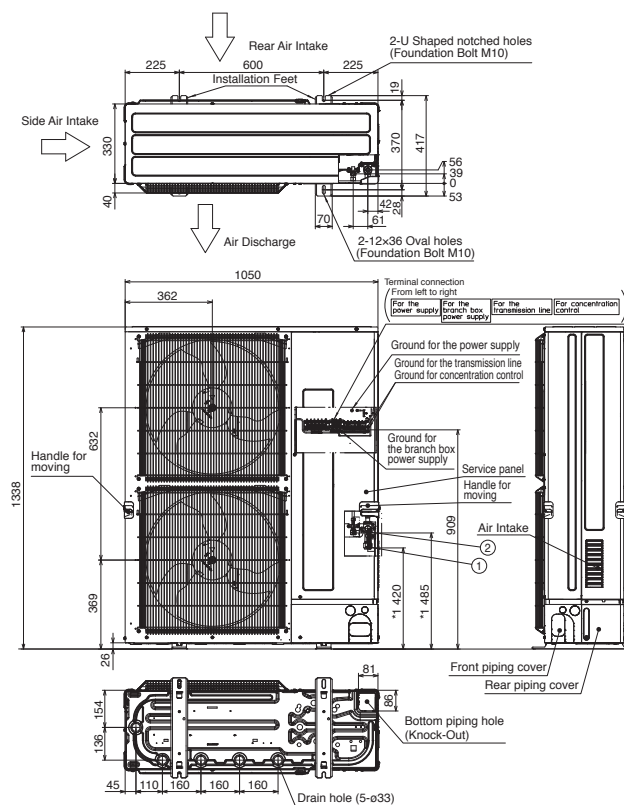


Example of Notes

- ①...Refrigerant GAS pipe connection (FLARE) φ15.88 (5/8F)
- ②...Refrigerant LIQUID pipe connection (FLARE) φ9.52 (3/8F)
- *1...Indication of STOP VALVE connection location.

PUMY-P200YKM2(-BS)

OUTDOOR UNIT

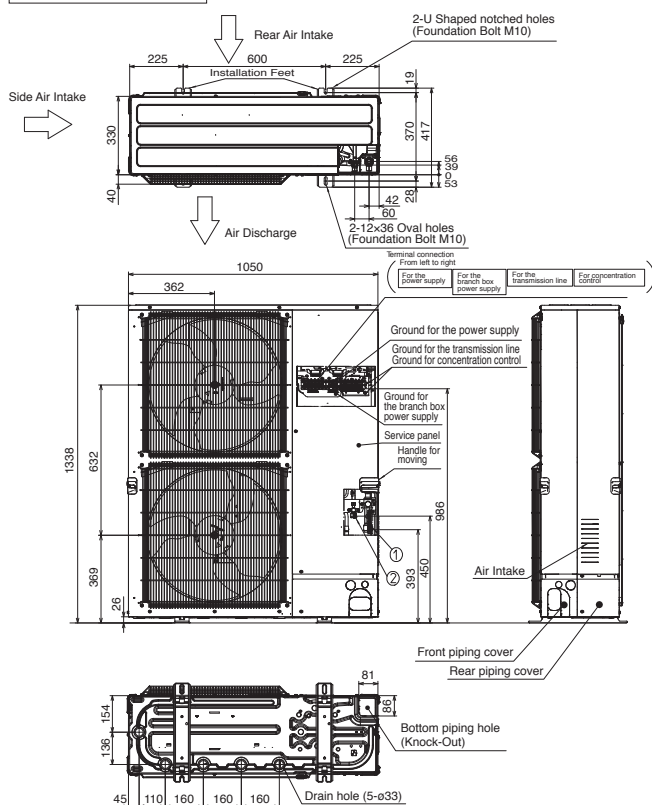


Example of Notes

- ①...Refrigerant GAS pipe connection (FLARE) φ19.05 (3/4F)
- ②...Refrigerant LIQUID pipe connection (FLARE) φ9.52 (3/8F)
- *1...Indication of STOP VALVE connection location.

PUMY-SP112/125/140VKM(-BS)
PUMY-SP112/125/140YKM(-BS)

OUTDOOR UNIT

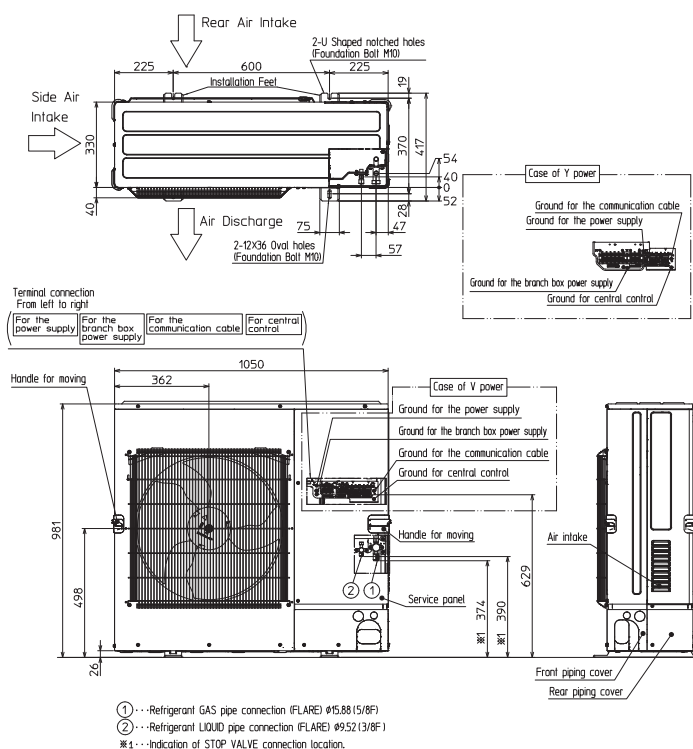


- ①...Refrigerant GAS pipe connection (FLARE) φ15.88 (5/8F)
- ②...Refrigerant LIQUID pipe connection (FLARE) φ9.52 (3/8F)
- *1...Indication of STOP VALVE connection location.

PAC-MK53BC

Suspension bolt: W3/W8 (M10)

Branch box

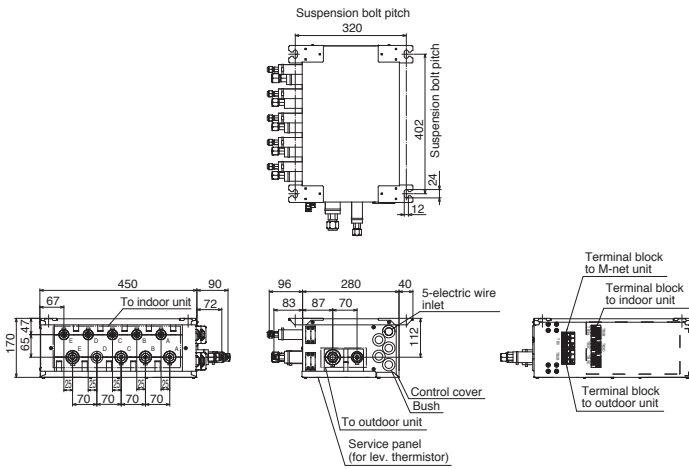

Suspension bolt : W3/8(M10)


Refrigerant pipe flared connection

	A	B	C	D	E	To outdoor unit
Liquid pipe	1/4F	1/4F	1/4F	1/4F	1/4F	3/8F
Gas pipe	3/8F	3/8F	3/8F	3/8F	1/2F	5/8F

PAC-MK33BC

Suspension bolt: W3/W8 (M10)

Branch box

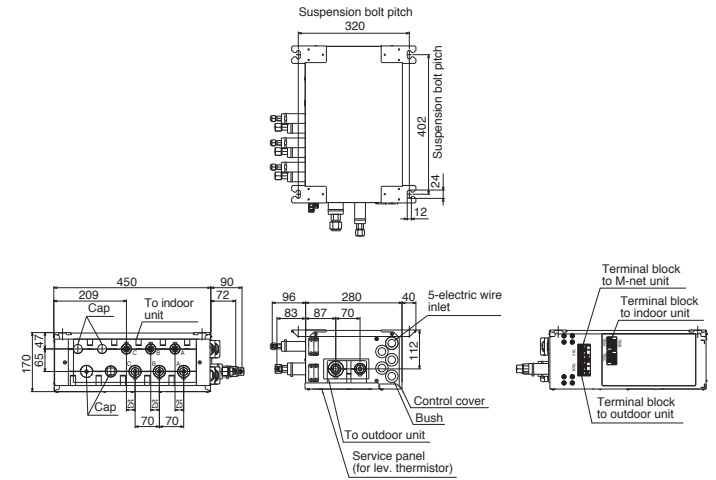

Suspension bolt : W3/8(M10)


Refrigerant pipe flared connection

	A	B	C			To outdoor unit
Liquid pipe	1/4F	1/4F	1/4F			3/8F
Gas pipe	3/8F	3/8F	3/8F			5/8F

PAC-MK53BCB

Suspension bolt: W3/W8 (M10)

Branch box

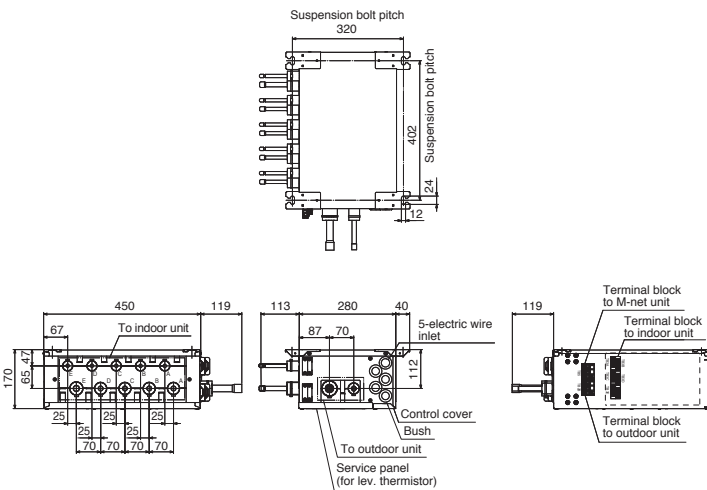

Suspension bolt : W3/8(M10)


Refrigerant pipe brazed connection

	A	B	C	D	E	To outdoor unit
Liquid pipe	ø6.35	ø6.35	ø6.35	ø6.35	ø6.35	ø9.52
Gas pipe	ø9.52	ø9.52	ø9.52	ø9.52	ø12.7	ø15.88

PAC-MK33BCB

Suspension bolt: W3/W8 (M10)

Branch box

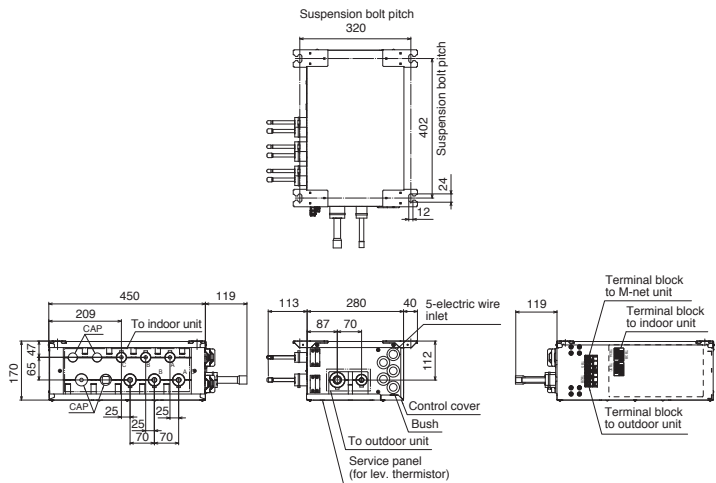

Suspension bolt : W3/8(M10)

Refrigerant pipe brazed connection

	A	B	C			To outdoor unit
Liquid pipe	ø6.35	ø6.35	ø6.35			ø9.52
Gas pipe	ø9.52	ø9.52	ø9.52			ø15.88

Piping Installation

M SERIES

Single type

Series	Class < Outdoor unit >	Maximum Piping Length (m)		Maximum Height Difference (m)		Maximum Number of Bends	
		Total length (A)		Outdoor unit - Indoor unit (H)		Total number	
MSZ-L	25 / 35	20		12		10	
	50	20		12		10	
	60	30		15		10	
MSZ-A	20 / 25 / 35 / 42 / 50	20		12		10	
	60 / 71	30		15		10	
MSZ-F MFZ	25 / 35	20		12		10	
	50	30		15		10	
MSZ-E	25 / 35 / 42	20		12		10	
	50	30		15		10	
MSZ-S	25 / 35 / 42	20		12		10	
	50 / 60	30		15		10	
MSZ-G	60 / 71	30		15		10	
MSZ-W MSZ-D	25 / 35	20		12		10	
MSY-TP	35 / 50	20		12		10	
MSZ-HJ	25 / 35 / 50	20		12		10	
	60 / 71	30		15		10	
MSZ-HR	25 / 35 / 42 / 50	20		12		10	
	60 / 71	30		15		10	

S SERIES & P SERIES

Single type

Series	Class <Outdoor unit>	Maximum Piping Length (m)	Maximum Height Difference (m)	Maximum Number of Bends
		Total length (A)	Outdoor unit - Indoor unit (H)	Total number
ZUBADAN (PUHZ-SHW)	80 / 112 / 140	75	30	15
Power Inverter (PUZ-ZM)	35 / 50	50	30	15
	60 / 71	55	30	15
	100 / 125 / 140	100	30	15
Power Inverter (PUHZ-ZRP)	35 / 50 / 60 / 71	50	30	15
	100 / 125 / 140	75	30	15
	200 / 250	100	30	15
Standard Inverter (PUZ-M & SUZ-M)	25 / 35	20	12	10
	50 / 60 / 71	30	30	10
	100	55	30	15
	125 / 140	65		
Standard Inverter (PUHZ-P & SUZ-KA)	25 / 35	20	12	10
	50 / 60 / 71	30	30	10
	100 / 125 / 140	50	30	15
	200 / 250	70	30	15

Twin type

Series	Class < Outdoor unit >	Maximum Piping Length (m)			Maximum Height Difference (m)			Maximum Number of Bends
		Total length A+B+C	Pipe length difference from distribution pipe B-C	Indoor unit - Distribution pipe B	Outdoor unit - Indoor unit H	Indoor unit - Indoor unit h	Total number	
ZUBADAN (PUHZ-SHW)	80 / 112 / 140	75	8	20	30	1	15	
Power Inverter (PUZ-ZM)	71	55	8	20	30	1	15	
	100 / 125 / 140	100	8	20	30	1	15	
	200 / 250							
Power Inverter (PUHZ-ZRP)	71	50	8	20	30	1	15	
	100 / 125 / 140	75	8	20	30	1	15	
	200 / 250	100	8	30	30	1	15	
Standard Inverter (PUZ-M)	100	55	8	20	30	1	15	
	125 / 140	65						
	200 / 250							
Standard Inverter (PUHZ-P)	100 / 125 / 140	50	8	20	30	1	15	
	200 / 250	70	8	30	30	1	15	


Triple type

Series	Class < Outdoor unit >	Maximum Piping Length (m)			Maximum Height Difference (m)			Maximum Number of Bends
		Total length A+B+C+D	Pipe length difference from distribution pipe B-C	Indoor unit - Distribution pipe B	Outdoor unit - Indoor unit H	Indoor unit - Indoor unit h	Total number	
Power Inverter (PUZ-ZM)	140	100	8	20	30	1	15	
	200 / 250							
Power Inverter (PUHZ-ZRP)	140	75	8	20	30	1	15	
	200 / 250	100	8	30	30	1	15	
Standard Inverter (PUZ-M)	140	65	8	20	30	1	15	
	200 / 250							
Standard Inverter (PUHZ-P)	140	50	8	20	30	1	15	
	200 / 250	70	8	28	30	1	15	

Quadruple type


Series	Class < Outdoor unit >	Maximum Piping Length (m)			Maximum Height Difference (m)			Maximum Number of Bends
		Total length A+B+C+D+E	Pipe length difference from distribution pipe B-C	Indoor unit - Distribution pipe B	Outdoor unit - Indoor unit H	Indoor unit - Indoor unit h	Total number	
Power Inverter (PUZ-ZM, PUHZ-ZRP)	200 / 250	100	8	30	30	1	15	
Standard Inverter (PUZ-M, PUHZ-P)	200 / 250	70	8	22	30	1	15	

Single type




Twin type

Total length A+B+C




Triple type

Total length A+B+C+D



Quadruple type

Total length A+B+C+D+E



MXZ SERIES


MXZ-2D33VA, MXZ-2F33VF3

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b)	15m
Total length (a+b)	20m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b)	15
Total number (a+b)	20

* When connecting MFZ-KJ Series indoor unit, additional refrigerant is required. For details, please contact Mitsubishi Electric.

Regarding MXZ-2D33, the second unit should be a different type in the case of selecting one MFZ-KJ.

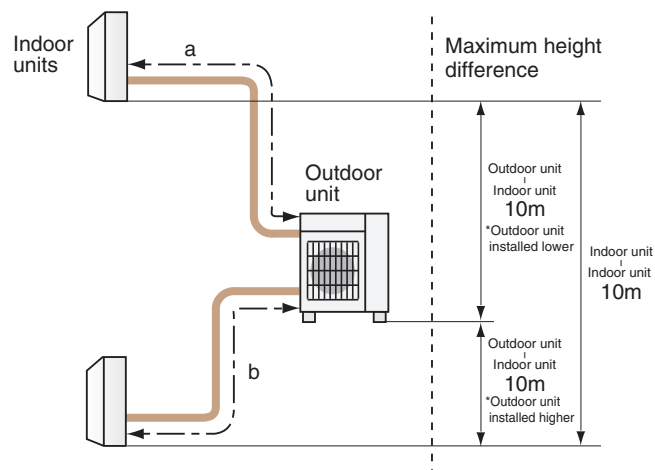

MXZ-2D42VA2, MXZ-2F42VF3


Maximum Piping Length	
Outdoor unit - Indoor unit (a,b)	20m
Total length (a+b)	30m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b)	20
Total number (a+b)	30

MXZ-2D53VA(H)2, MXZ-2E53VAHZ, MXZ-2F53VF(H)3

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b)	20m
Total length (a+b)	30m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b)	20
Total number (a+b)	30

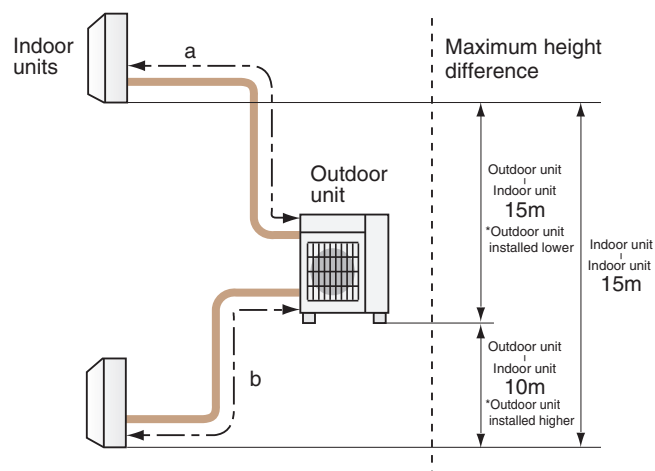


* When connecting MFZ-KJ Series indoor unit to MXZ-2D42VA2 or MXZ-2D53VA(H)2, additional refrigerant is required. For details, please contact Mitsubishi Electric.

MXZ SERIES

MXZ-2DM40VA, MXZ-2HA40VF, MXZ-2HA50VF

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b)	20m
Total length (a+b)	30m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b)	20
Total number (a+b)	30

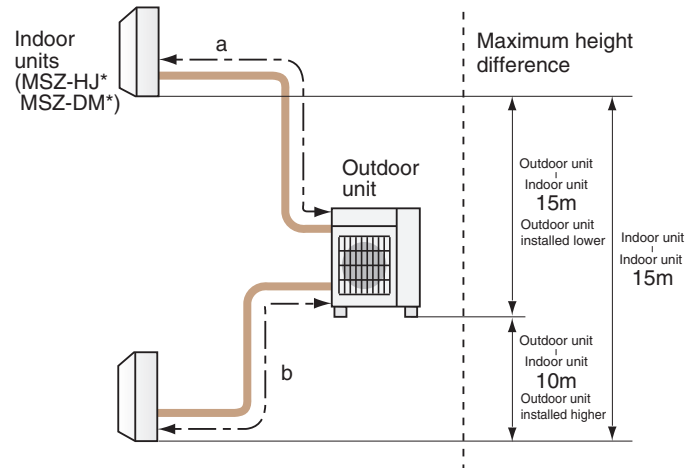


* Only MSZ-HJ and DM model is connectable.

MXZ-3DM50VA, MXZ-3HA50VF

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c)	25m
Total length (a+b+c)	50m

Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c)	25
Total number (a+b+c)	50

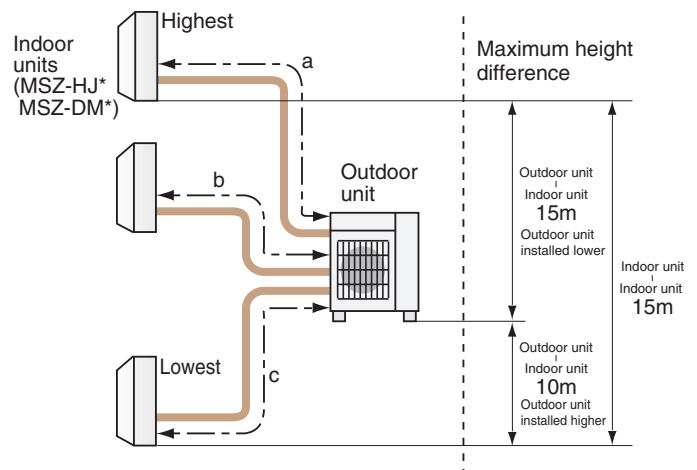

* Only MSZ-HJ and DM model is connectable.

MXZ-4E72VA, MXZ-4F72VF3

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d)	25m
Total length (a+b+c+d)	60m


Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d)	25
Total number (a+b+c+d)	60

* When connecting MFZ-KJ Series indoor unit, additional refrigerant is required. For details, please contact Mitsubishi Electric.

MXZ-4E83VA, MXZ-4E83VAHZ

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d)	25m
Total length (a+b+c+d)	70m


Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d)	25
Total number (a+b+c+d)	70

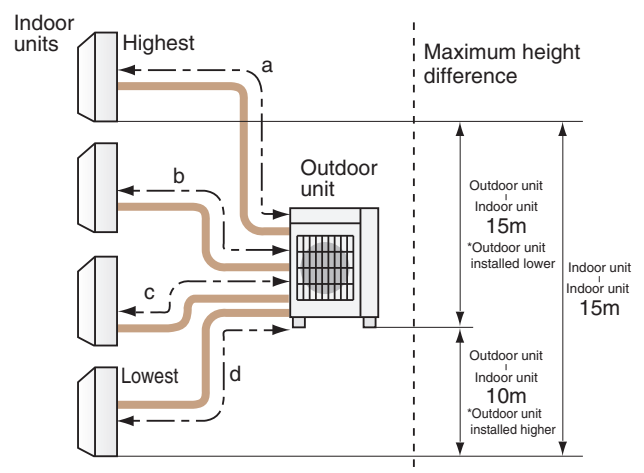

MXZ-5E102VA

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d,e)	25m
Total length (a+b+c+d+e)	80m


Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d,e)	25
Total number (a+b+c+d+e)	80

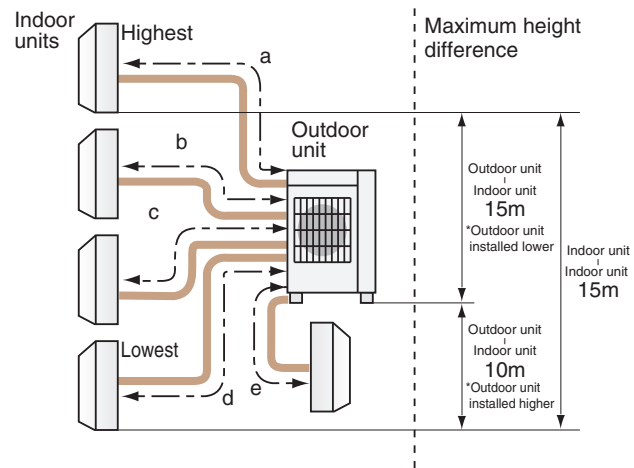

MXZ-6D122VA2

Maximum Piping Length	
Outdoor unit - Indoor unit (a,b,c,d,e,f)	25m
Total length (a+b+c+d+e+f)	80m


Maximum Number of Bends	
Outdoor unit - Indoor unit (a,b,c,d,e,f)	25
Total number (a+b+c+d+e+f)	80

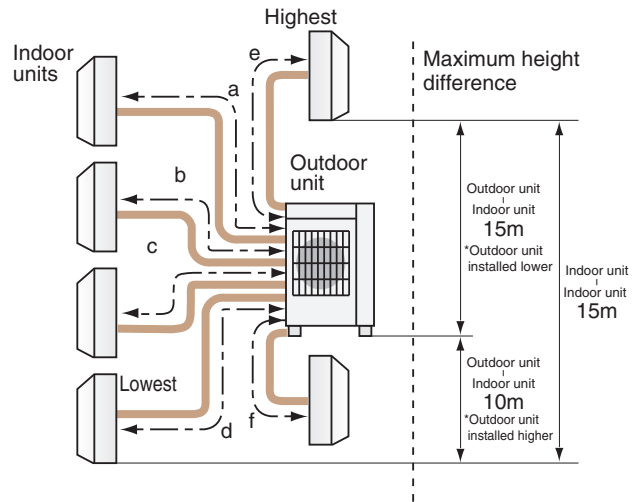

PUMY SERIES

PUMY-SP112/125/140V(Y)KM


1-Branch box

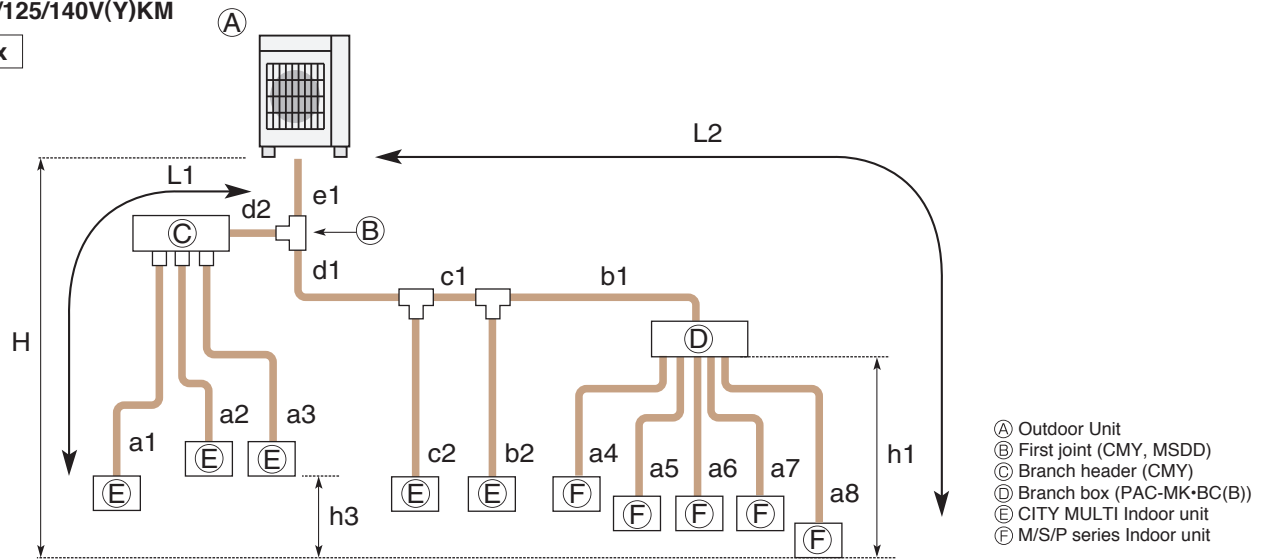

Permissible length (One-way)	Total piping length	$e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 \leq 120 \text{ m}$
	Farthest piping length (L1)	$e1 + d2 + a1 \text{ or } e1 + d1 + c1 + b2 \leq 70 \text{ m}$
	Farthest piping length. Via Branch box (L2)	$e1 + d1 + c1 + b1 + a8 \leq 50 \text{ m}$
	Piping length between outdoor unit and branch box	$e1 + d1 + c1 + b1 \leq 55 \text{ m}$
	Farthest piping length from the first joint	$d1 + c1 + b1 \text{ or } d1 + c1 + b2 \leq 50 \text{ m}$
	Farthest piping length after branch box	$a8 \leq 25 \text{ m}$
	Total piping length between branch boxes and indoor units	$a4 + a5 + a6 + a7 + a8 \leq 95 \text{ m}$
Permissible height difference (One-way)	In indoor/outdoor section (H)*1	$H \leq 50 \text{ m}$ (In case of outdoor unit is set higher than indoor unit) $H \leq 30 \text{ m}$ (In case of outdoor unit is set lower than indoor unit)
	In branch box/indoor unit section (h1)	$h1 \leq 15 \text{ m}$
	In each indoor unit (h3)	$h3 \leq 12 \text{ m}$
	Number of bends	$le1 + d2 + a1l, le1 + d2 + a2l, le1 + d2 + a3l, le1 + d1 + c2l, le1 + d1 + c1 + b2l, le1 + d1 + c1 + b1 + a4l, le1 + d1 + c1 + b1 + a5l, le1 + d1 + c1 + b1 + a6l, le1 + d1 + c1 + b1 + a7l, le1 + d1 + c1 + b1 + a8l \leq 15$

*1: Branch box should be placed within the level between the outdoor unit and indoor units.

2-Branch boxes

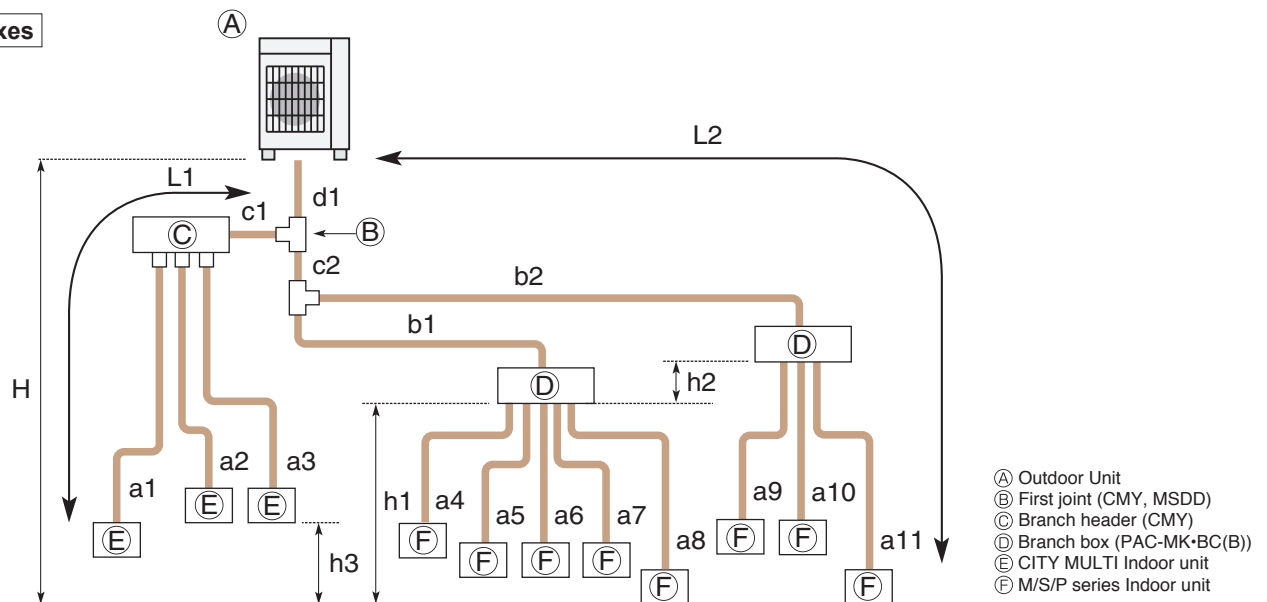


Permissible length (One-way)	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \leq 120 \text{ m}$
	Farthest piping length (L1)	$d1 + c1 + a1 \leq 70 \text{ m}$
	Farthest piping length. Via Branch box (L2)	$d1 + c2 + b2 + a11 \leq 80 \text{ m}$
	Piping length between outdoor unit and branch boxes	$d1 + c2 + b1 + b2 \leq 55 \text{ m}$
	Farthest piping length from the first joint	$c2 + b2 \text{ or } c1 + a1 \leq 50 \text{ m}$
	Farthest piping length after branch box	$a11 \leq 25 \text{ m}$
	Farthest branch box from outdoor unit	$d1 + c2 + b2 \leq 55 \text{ m}$
Permissible height difference (One-way)	Total piping length between branch boxes and indoor units	$a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \leq 95 \text{ m}$
	In indoor/outdoor section (H)*1	$H \leq 50 \text{ m}$ (In case of outdoor unit is set higher than indoor unit) $H \leq 30 \text{ m}$ (In case of outdoor unit is set lower than indoor unit)
	In branch box/indoor unit section (h1)	$h1 + h2 \leq 15 \text{ m}$
	In each branch unit (h2)	$h2 \leq 15 \text{ m}$
Number of bends	In each indoor unit (h3)	$h3 \leq 12 \text{ m}$
	Number of bends	$ld1 + c1 + a1l, ld1 + c1 + a2l, ld1 + c1 + a3l, ld1 + c2 + b1 + a4l, ld1 + c2 + b1 + a5l, ld1 + c2 + b1 + a6l, ld1 + c2 + b1 + a7l, ld1 + c2 + b1 + a8l, ld1 + c2 + b2 + a9l, ld1 + c2 + b2 + a10l, ld1 + c2 + b2 + a11l \leq 15$

*1: Branch box should be placed within the level between the outdoor unit and indoor units.

PUMY-P112/125/140V(Y)KM(E)4

1-Branch box

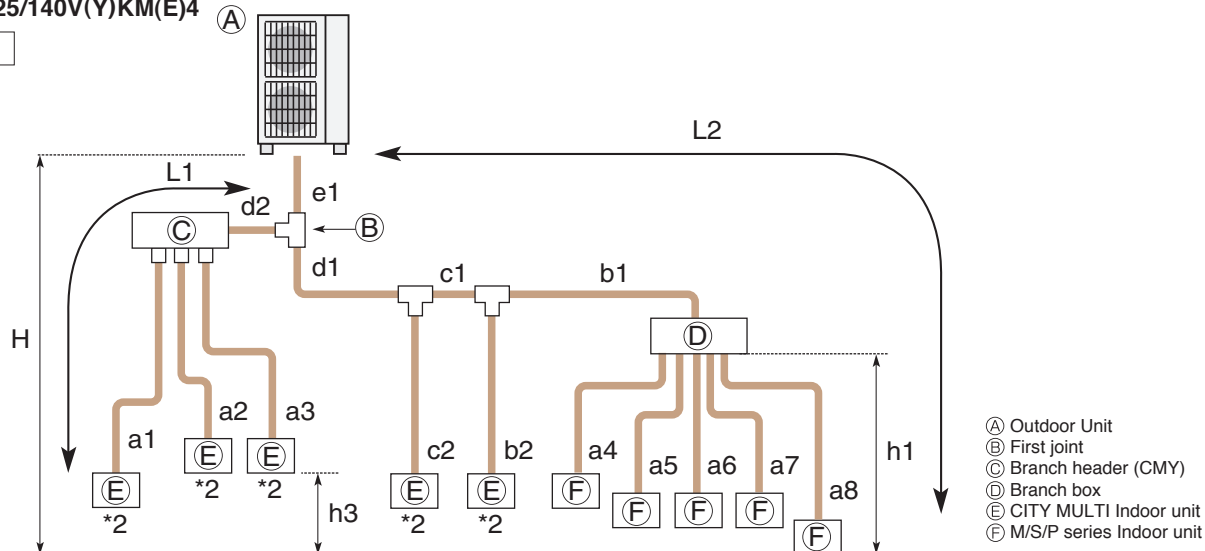


Permissible length (One-way)	Total piping length	$e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 \leq 300 \text{ m}$
	Farthest piping length (L1)	$e1 + d2 + a1$ or $e1 + d1 + c1 + b2 \leq 85 \text{ m}$
	Farthest piping length. Via Branch box (L2)	$e1 + d1 + c1 + b1 + a8 \leq 80 \text{ m}$
	Piping length between outdoor unit and branch box	$e1 + d1 + c1 + b1 \leq 55 \text{ m}$
	Farthest piping length from the first joint	$d1 + c1 + b1$ or $d1 + c1 + b2 \leq 30 \text{ m}$
	Farthest piping length after branch box	$a8 \leq 25 \text{ m}$
	Total piping length between branch boxes and indoor units	$a4 + a5 + a6 + a7 + a8 \leq 95 \text{ m}$
Permissible height difference (One-way)	In indoor/outdoor section (H)*1	$H \leq 50 \text{ m}$ (In case of outdoor unit is set higher than indoor unit)
	In branch box/indoor unit section (h1)	$H \leq 40 \text{ m}$ (In case of outdoor unit is set lower than indoor unit)
	In each indoor unit (h3)	$h1 \leq 15 \text{ m}$
	In each indoor unit (h3)	$h3 \leq 12 \text{ m}$
Number of bends		$le1 + d2 + a1l, le1 + d2 + a2l, le1 + d2 + a3l, le1 + d1 + c2l, le1 + d1 + c1 + b2l, le1 + d1 + c1 + b1 + a4l, le1 + d1 + c1 + b1 + a5l, le1 + d1 + c1 + b1 + a6l, le1 + d1 + c1 + b1 + a7l, le1 + d1 + c1 + b1 + a8l \leq 15$

*1: Branch box should be placed within the level between the outdoor unit and indoor units.

*2: PKFY and PFFY Series cannot be connected.

2-Branch boxes

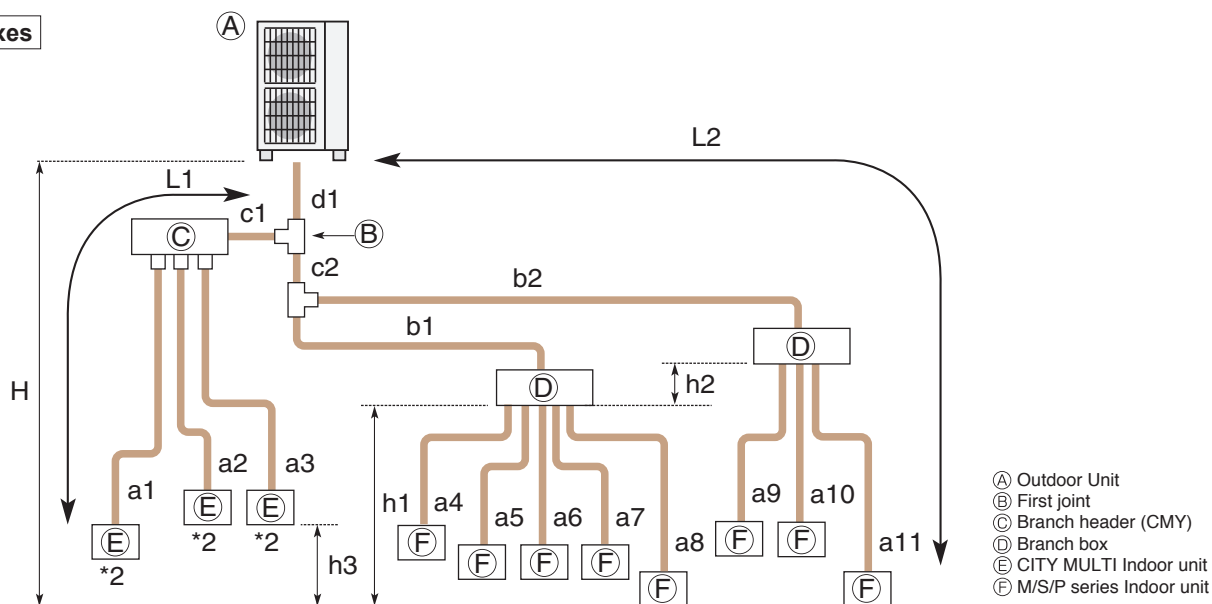


Permissible length (One-way)	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \leq 240 \text{ m}$
	Farthest piping length (L1)	$d1 + c1 + a1 \leq 85 \text{ m}$
	Farthest piping length. Via Branch box (L2)	$d1 + c2 + b2 + a11 \leq 80 \text{ m}$
	Piping length between outdoor unit and branch boxes	$d1 + c2 + b1 + b2 \leq 55 \text{ m}$
	Farthest piping length from the first joint	$c2 + b2$ or $c1 + a1 \leq 30 \text{ m}$
	Farthest piping length after branch box	$a11 \leq 25 \text{ m}$
	Farthest branch box from outdoor unit	$d1 + c2 + b2 \leq 55 \text{ m}$
Permissible height difference (One-way)	Total piping length between branch boxes and indoor units	$a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \leq 95 \text{ m}$
	In indoor/outdoor section (H)*1	$H \leq 50 \text{ m}$ (In case of outdoor unit is set higher than indoor unit)
	In branch box/indoor unit section (h1)	$H \leq 40 \text{ m}$ (In case of outdoor unit is set lower than indoor unit)
	In each branch unit (h2)	$h1 + h2 \leq 15 \text{ m}$
Number of bends	In each indoor unit (h3)	$h2 \leq 15 \text{ m}$
	In each indoor unit (h3)	$h3 \leq 12 \text{ m}$
	In each indoor unit (h3)	$ld1 + c1 + a1l, ld1 + c1 + a2l, ld1 + c1 + a3l, ld1 + c2 + b1 + a4l, ld1 + c2 + b1 + a5l, ld1 + c2 + b1 + a6l, ld1 + c2 + b1 + a7l, ld1 + c2 + b1 + a8l, ld1 + c2 + b2 + a9l, ld1 + c2 + b2 + a10l, ld1 + c2 + b2 + a11l \leq 15$

*1: Branch box should be placed within the level between the outdoor unit and indoor units.

*2: PKFY and PFFY Series cannot be connected.

PUMY-P200YKM2(-BS)


1-Branch box

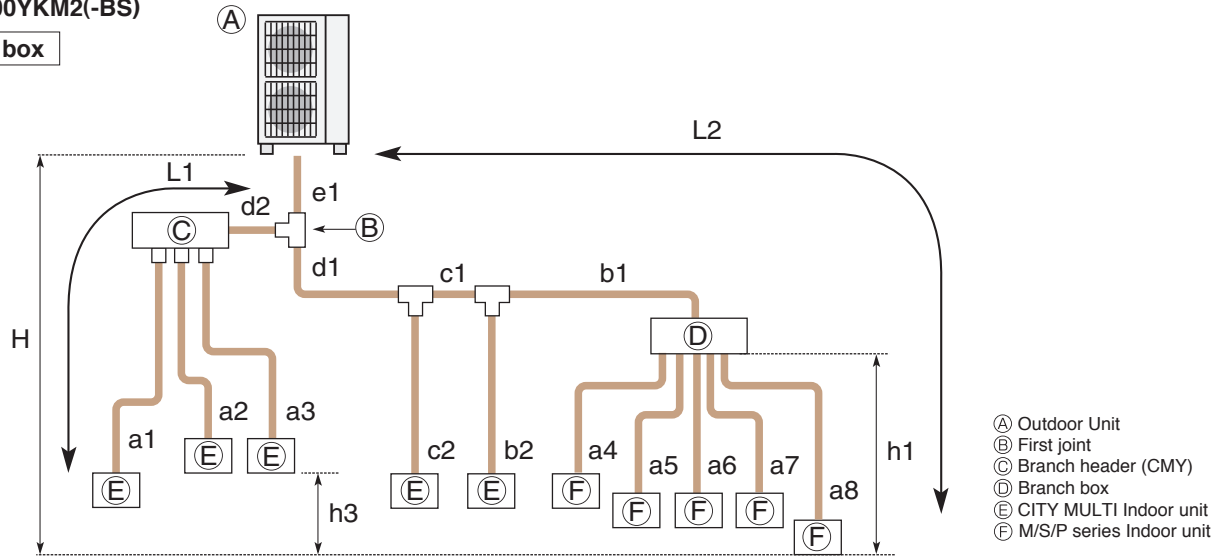

Permissible length (One-way)	Total piping length	$e1 + d1 + d2 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 \leq 150 \text{ m}$
	Farthest piping length (L1)	$e1 + d2 + a1 \text{ or } e1 + d1 + c1 + b2 \leq 80 \text{ m}$
	Farthest piping length. Via Branch box (L2)	$e1 + d1 + c1 + b1 + a8 \leq 80 \text{ m}$
	Piping length between outdoor unit and branch box	$e1 + d1 + c1 + b1 \leq 55 \text{ m}$
	Farthest piping length from the first joint	$d1 + c1 + b1 \text{ or } d1 + c1 + b2 \leq 30 \text{ m}$
	Farthest piping length after branch box	$a8 \leq 25 \text{ m}$
	Total piping length between branch boxes and indoor units	$a4 + a5 + a6 + a7 + a8 \leq 95 \text{ m}$
Permissible height difference (One-way)	In indoor/outdoor section (H)*1	$H \leq 50 \text{ m}$ (In case of outdoor unit is set higher than indoor unit) $H \leq 40 \text{ m}$ (In case of outdoor unit is set lower than indoor unit)
	In branch box/indoor unit section (h1)	$h1 \leq 15 \text{ m}$
	In each indoor unit (h3)	$h3 \leq 12 \text{ m}$
Number of bends		$ e1 + d2 + a1 , e1 + d2 + a2 , e1 + d2 + a3 , e1 + d1 + c2 , e1 + d1 + c1 + b2 , e1 + d1 + c1 + b1 + a4 , e1 + d1 + c1 + b1 + a5 , e1 + d1 + c1 + b1 + a6 , e1 + d1 + c1 + b1 + a7 , e1 + d1 + c1 + b1 + a8 \leq 15$

*1: Branch box should be placed within the level between the outdoor unit and indoor units.

2-Branch boxes

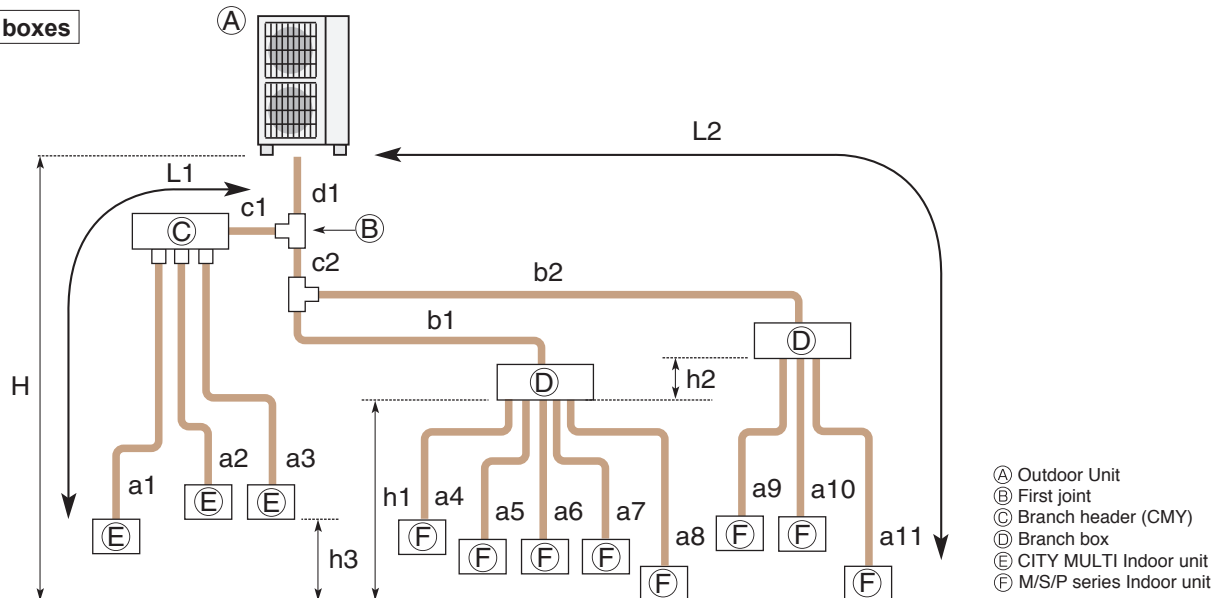

Permissible length (One-way)	Total piping length	$d1 + c1 + c2 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 + a9 + a10 + a11 \leq 150 \text{ m}$
	Farthest piping length (L1)	$d1 + c1 + a1 \leq 80 \text{ m}$
	Farthest piping length. Via Branch box (L2)	$d1 + c2 + b2 + a11 \leq 80 \text{ m}$
	Piping length between outdoor unit and branch boxes	$d1 + c2 + b1 + b2 \leq 55 \text{ m}$
	Farthest piping length from the first joint	$c2 + b2 \text{ or } c1 + a1 \leq 30 \text{ m}$
	Farthest piping length after branch box	$a11 \leq 25 \text{ m}$
	Farthest branch box from outdoor unit	$d1 + c2 + b2 \leq 55 \text{ m}$
Permissible height difference (One-way)	In indoor/outdoor section (H)*1	$H \leq 50 \text{ m}$ (In case of outdoor unit is set higher than indoor unit) $H \leq 40 \text{ m}$ (In case of outdoor unit is set lower than indoor unit)
	In branch box/indoor unit section (h1)	$h1 + h2 \leq 15 \text{ m}$
	In each branch unit (h2)	$h2 \leq 15 \text{ m}$
Number of bends	In each indoor unit (h3)	$h3 \leq 12 \text{ m}$
		$ d1 + c1 + a1 , d1 + c1 + a2 , d1 + c1 + a3 , d1 + c2 + b1 + a4 , d1 + c2 + b1 + a5 , d1 + c2 + b1 + a6 , d1 + c2 + b1 + a7 , d1 + c2 + b1 + a8 , d1 + c2 + b2 + a9 , d1 + c2 + b2 + a10 , d1 + c2 + b2 + a11 \leq 15$

*1: Branch box should be placed within the level between the outdoor unit and indoor units.

Explanation of Terminology

Maximum piping length:

This is the [maximum allowable length of the refrigerant piping](#). The amount of refrigerant pipe used cannot be longer than the length specified.

Total length:

The maximum allowable combined length of all the refrigerant piping between the outdoor unit and indoor unit(s).

Outdoor Unit - Indoor Unit:

The [maximum allowable length](#) of the refrigerant piping [between the outdoor unit and indoor units installed](#) when multiple units are connected to a single outdoor unit. This distance limitation refers to the maximum length between the outdoor unit and the farthest indoor unit.

Pipe length difference from distribution pipe:

The [maximum allowable difference](#) in refrigerant piping length [from the distribution pipe to the farthest indoor unit](#) and [from the distribution pipe to the closest indoor unit](#) when multiple indoor units are connected to a single outdoor unit using a distribution pipe.

Indoor Unit - Distribution Pipe:

The [maximum allowable length](#) of the refrigerant piping [between indoor units and the distribution pipe](#) when multiple indoor units are connected to a single outdoor unit.

Maximum height difference:

This is the [maximum allowable height difference](#). It is necessary to install the air conditioning system so that the height distance is no more than the difference specified. (Specified differences may vary if the outdoor unit is installed higher or lower than the indoor units).

Outdoor unit - Indoor unit:

The [maximum allowable difference](#) in height [between the outdoor unit and indoor units](#) when installed (when multiple indoor units are connected to a single outdoor unit, this distance limitation refers to the maximum height difference between the outdoor unit and an indoor unit).

Indoor unit - Indoor unit:

The [maximum allowable difference](#) [between the heights of indoor units](#) when multiple indoor units are connected to a single outdoor unit.

Maximum number of bends:

This is the [maximum allowable number of bends in the refrigerant piping](#). The total number of bends in the refrigerant piping used cannot exceed the number specified.

Total number:

The maximum allowable number of bends for [all refrigerant piping between the outdoor unit and indoor units](#).

Outdoor unit - Indoor unit:

The [maximum allowable number](#) of bends [between the outdoor unit and each indoor unit](#) when multiple indoor units are connected to a single outdoor unit.

Conditions for specifications

Temperature conditions are based on JIS B8616.

Cooling	Indoor	27°C DB, 19°C WB
	Outdoor	35°C DB, 24°C WB
Heating	Indoor	20°C DB
	Outdoor	7°C DB, 6°C WB

Refrigerant piping length ; 5m

The figures for total input are based on the following voltages.

Series	Indoor unit	Outdoor unit
M Series S Series P Series (except for PEA) MXZ Series POWERFUL HEATING Series	—	VG,VE,VA,VHA,VKA:230V/Single phase/50Hz YA,YHA,YKA:400V/Three phase/50Hz
PEA Series	400V/Three phase/50Hz	400V/Three phase/50Hz

Sound pressure level

- The sound pressure measurement is conducted in an anechoic chamber.
- The actual sound level depends on the distance from the unit and the acoustic environment.

How to read a model name

1) M & S Series

M	M : M Series S : S Series
S	"S"= Wall-mounted , "F"= Compact floor-standing , "E"= Compact ceiling-concealed , "L"= 4- or 1-way cassette , "U"= Outdoor unit
Z	"Z"= Inverter heat pump , "H"= Fixed-speed heat pump , "blank"= Cooling only of Non-inverter , "Y"= Cooling only of inverter
—	
F	Series
H	Generation
25	Rated cooling capacity (kW base)
V	230V / Single phase / 50Hz
E	"A"= R410A with new A control , "B"= R410A with conventional control , "E"= R410A with new A control & ErP correspondance , "G"=R32 with new A control & ErP correspondance , "F"= R32 with new A control
HZ	"HZ"= Hyper Heating model , "H"= Anti-freeze heater equipped model , "S"= Silver indoor unit , "W"= White/Natural White indoor unit , "B"= Black/Onyx Black indoor unit , "V"= Pearl White indoor unit , "R"= Ruby Red indoor unit

2) P Series

P	P Series
U	"K"= Wall-mounted , "S"= Floor-standing , "L"= 4-way cassette , "E"= Ceiling-concealed , "C"= Ceiling-suspended , "U"= Outdoor unit
H	"H"= For heating and cooling
Z	"Z"= Inverter
—	

ZM/M/ZRP/RP/P "ZM"= R32 Eco-conscious Power Inverter , "M"= R32 &R410A

"ZRP"/"RP"= R410A & cleaning-free pipe reuse , "P"=R410A

SHW "SH"= Powerful heating ZUBADAN , "W"= can be used as air to water application

71	Rated cooling capacity (kW base)
V	"V"= 230V / Single phase / 50Hz , "Y"= 400V / Three phase / 50Hz
H	Generation
A	"A"= A control

3) MXZ Series

M	M Series
X	Multi-system outdoor unit (heat pump)
Z	Inverter heat pump
—	
4	Maximum number of connectable indoor units
D/E/F/HJ/DM	Generation / Type
72	Rated cooling capacity (kW base)
V	"V"= 230V / Single phase / 50Hz
A	"A"= R410A with new A control
HZ	"HZ"= Hyper Heating model , "H"= Anti-freeze heater equipped model

Refrigerant Amount

M/S/P/Multi/Zubadan/ATW


	Model Name	Refrigerant	Pre-charged quantity			Max. added quantity	
			GWP	Weight (kg)	CO ₂ equivalent (t)	Weight (kg)	CO ₂ equivalent (t)
M-Series	MUZ-LN25VG	R32	675	1.00	0.68	0.26	0.18
	MUZ-LN25VG2	R32	675	0.8	0.54	0.2	0.135
	MUZ-LN35VG	R32	675	1.00	0.68	0.26	0.18
	MUZ-LN35VG2	R32	675	0.85	0.57	0.2	0.135
	MUZ-LN50VG	R32	675	1.25	0.85	0.26	0.18
	MUZ-LN50VG2	R32	675	1.25	0.85	0.1	0.07
	MUZ-LN60VG	R32	675	1.45	0.98	0.46	0.32
	MUZ-LN25VGHZ	R32	675	1.00	0.68	0.26	0.18
	MUZ-LN35VGHZ	R32	675	1.00	0.68	0.26	0.18
	MUZ-LN50VGHZ	R32	675	1.45	0.98	0.46	0.32
	MUZ-AP20VG	R32	675	0.55	0.37	0.26	0.18
	MUZ-AP25VG	R32	675	0.55	0.37	0.26	0.18
	MUZ-AP35VG	R32	675	0.55	0.37	0.26	0.18
	MUZ-AP42VG	R32	675	0.70	0.47	0.26	0.18
	MUZ-AP50VG	R32	675	1.00	0.68	0.26	0.18
	MUZ-AP60VG	R32	675	1.05	0.71	0.3	0.2
	MUZ-AP71VG	R32	675	1.50	1.02	0.3	0.2
	MUZ-AP25VGH	R32	675	0.55	0.37	0.26	0.18
	MUZ-AP35VGH	R32	675	0.55	0.37	0.26	0.18
	MUZ-AP42VGH	R32	675	0.70	0.47	0.26	0.18
	MUZ-AP50VGH	R32	675	1.00	0.68	0.26	0.18
	MUZ-FH25VE	R410A	2088	1.15	2.41	0.39	0.82
	MUZ-FH35VE	R410A	2088	1.15	2.41	0.39	0.82
	MUZ-FH50VE	R410A	2088	1.55	3.24	0.46	0.97
	MUZ-FH25VEHZ	R410A	2088	1.15	2.41	0.39	0.82
	MUZ-FH35VEHZ	R410A	2088	1.15	2.41	0.39	0.82
	MUZ-FH50VEHZ	R410A	2088	1.55	3.24	0.46	0.97
	MUZ-EF25VG(H)	R32	675	0.62	0.42	0.26	0.18
	MUZ-EF35VG(H)	R32	675	0.74	0.50	0.26	0.18
	MUZ-EF42VG	R32	675	0.74	0.50	0.26	0.18
	MUZ-EF50VG	R32	675	1.05	0.71	0.46	0.32
	MUZ-SF25VE(H)	R410A	2088	0.7	1.47	0.39	0.82
	MUZ-SF35VE(H)	R410A	2088	0.8	1.68	0.39	0.82
	MUZ-SF42VE(H)	R410A	2088	1.15	2.41	0.39	0.82
	MUZ-SF50VE(H)	R410A	2088	1.55	3.24	0.46	0.97
	MUZ-GF60VE	R410A	2088	1.55	3.24	0.4	0.84
	MUZ-GF71VE	R410A	2088	1.9	3.97	1.1	2.30
	MUZ-WN25VA	R410A	2088	0.7	1.47	0.26	0.55
	MUZ-WN35VA	R410A	2088	0.7	1.47	0.26	0.55
	MUZ-BT20VG	R32	675	0.45	0.3	0.26	0.18
	MUZ-BT25VG	R32	675	0.5	0.34	0.26	0.18
	MUZ-BT35VG	R32	675	0.5	0.34	0.26	0.18
	MUZ-BT50VG	R32	675	0.7	0.47	0.26	0.18
	MUY-TP35VF	R32	675	0.85	0.57	0.13	0.09
	MUY-TP50VF	R32	675	0.85	0.57	0.13	0.09
	MUZ-DM25VA	R410A	2088	0.7	1.47	0.26	0.55
	MUZ-DM35VA	R410A	2088	0.72	1.51	0.26	0.55
	MUZ-HJ25VA	R410A	2088	0.7	1.47	0.26	0.55
	MUZ-HJ35VA	R410A	2088	0.72	1.51	0.26	0.55
	MUZ-HJ50VA	R410A	2088	1.15	2.41	0.26	0.55
	MUZ-HJ60VA	R410A	2088	1.8	3.76	0.46	0.97
	MUZ-HJ71VA	R410A	2088	1.8	3.76	0.46	0.97
	MUZ-HR25VF	R32	675	0.40	0.27	0.26	0.18
	MUZ-HR35VF	R32	675	0.45	0.30	0.26	0.18
	MUZ-HR42VF	R32	675	0.70	0.47	0.26	0.18
	MUZ-HR50VF	R32	675	0.80	0.54	0.26	0.18
	MUZ-HR60VF	R32	675	1.05	0.71	0.46	0.32
	MUZ-HR71VF	R32	675	1.05	0.71	0.46	0.32
	MUFZ-KJ25VE	R410A	2088	1.1	2.30	0.39	0.82
	MUFZ-KJ35VE	R410A	2088	1.1	2.30	0.39	0.82
	MUFZ-KJ50VE	R410A	2088	1.5	3.14	0.46	0.97
	MUFZ-KJ25VEHZ	R410A	2088	1.1	2.30	0.39	0.82
	MUFZ-KJ35VEHZ	R410A	2088	1.1	2.30	0.39	0.82
	MUFZ-KJ50VEHZ	R410A	2088	1.5	3.14	0.46	0.97
	MXZ-2D33VA	R410A	2088	1.15	2.72	0.0	0.00
	MXZ-2D42VA2	R410A	2088	1.3	2.72	0.2	0.42
	MXZ-2D53VA(H)2	R410A	2088	1.3	2.72	0.2	0.42
	MXZ-3E54VA	R410A	2088	2.7	5.64	0.2	0.42
	MXZ-3E68VA	R410A	2088	2.7	5.64	0.4	0.84
	MXZ-4E72VA	R410A	2088	2.7	5.64	0.4	0.84
	MXZ-4E83VA	R410A	2088	2.99	6.25	0.9	1.88
	MXZ-5E102VA	R410A	2088	2.99	6.25	1.6	3.35
	MXZ-6D122VA	R410A	2088	4.0	8.36	1.0	2.09
	MXZ-2F33VF3	R32	675	0.8	0.54	0.8	0.54
	MXZ-2F42VF3	R32	675	1.0	0.675	1.0	0.675
	MXZ-2F53VF(H)3	R32	675	1.0	0.675	1.0	0.675
	MXZ-3F54VF3	R32	675	2.4	1.62	2.4	1.62
	MXZ-3F68VF3	R32	675	2.4	1.62	2.4	1.62
	MXZ-4F72VF3	R32	675	2.4	1.62	2.4	1.62
	MXZ-4F80VF3	R32	675	2.4	1.62	2.4	1.62
	MXZ-2E53VAHZ	R410A	2088	2.0	4.18	0.2	0.42
	MXZ-4E83VAHZ	R410A	2088	3.9	8.15	0.9	1.88
	MXZ-2DM40VA	R410A	2088	0.95	1.99	0.2	0.42
	MXZ-3DM50VA	R410A	2088	2.7	5.64	0.2	0.42
	MXZ-2HA40VF	R32	675	0.9	0.61	0.9	0.61
	MXZ-2HA50VF	R32	675	0.9	0.61	0.9	0.61
	MXZ-3HA50VF	R32	675	1.4	0.95	1.6	1.08
S-Series	SUZ-M25VA	R32	675	0.65	0.44	0.91	0.61
	SUZ-M35VA	R32	675	0.9	0.61	1.16	0.78
	SUZ-M50VA	R32	675	1.2	0.81	1.66	1.12
	SUZ-M60VA	R32	675	1.25	0.84	1.71	1.15
	SUZ-M71VA	R32	675	1.45	0.98	2.37	1.60
	SUZ-KA25VA6	R410A	2088	0.8	1.68	0.39	0.82
	SUZ-KA35VA6	R410A	2088	1.15	2.41	0.39	0.82
	SUZ-KA50VA6	R410A	2088	1.6	3.35	0.46	0.97
	SUZ-KA60VA6	R410A	2088	1.6	3.35	0.46	0.97
	SUZ-KA71VA6	R410A	2088	1.8	3.76	1.265	2.65

	Model Name	Refrigerant	Pre-charged quantity			Max. added quantity	
			GWP	Weight [kg]	CO ₂ equivalent [t]	Weight [kg]	CO ₂ equivalent [t]
P-Series	PUZ-ZM35VKA	R32	675	2.0	1.35	0.3	0.20
	PUZ-ZM50VKA	R32	675	2.0	1.35	0.3	0.20
	PUZ-ZM60VHA	R32	675	2.8	1.89	0.8	0.54
	PUZ-ZM71VHA	R32	675	2.8	1.89	0.8	0.54
	PUZ-ZM100VKA	R32	675	4.0	2.70	2.8	1.89
	PUZ-ZM100YKA	R32	675	4.0	2.70	2.8	1.89
	PUZ-ZM125VKA	R32	675	4.0	2.70	2.8	1.89
	PUZ-ZM125YKA	R32	675	4.0	2.70	2.8	1.89
	PUZ-ZM140VKA	R32	675	4.0	2.70	2.8	1.89
	PUZ-ZM140YKA	R32	675	4.0	2.70	2.8	1.89
	PUZ-ZM200YKA	R32	675	6.3	4.25	9.2	6.21
	PUZ-ZM250YKA	R32	675	6.8	4.59	9.2	6.21
	PUHZ-ZRP35VKA2	R410A	2088	2.2	4.60	0.4	0.84
	PUHZ-ZRP50VKA2	R410A	2088	2.4	5.02	0.4	0.84
	PUHZ-ZRP60VHA2	R410A	2088	3.5	7.31	1.2	2.51
	PUHZ-ZRP71VHA2	R410A	2088	3.5	7.31	1.2	2.51
	PUHZ-ZRP100VKA3	R410A	2088	5.0	10.44	2.4	5.02
	PUHZ-ZRP100YKA3	R410A	2088	5.0	10.44	2.4	5.02
	PUHZ-ZRP125VKA3	R410A	2088	5.0	10.44	2.4	5.02
	PUHZ-ZRP125YKA3	R410A	2088	5.0	10.44	2.4	5.02
	PUHZ-ZRP140VKA3	R410A	2088	5.0	10.44	2.4	5.02
	PUHZ-ZRP140YKA3	R410A	2088	5.0	10.44	2.4	5.02
	PUHZ-ZRP200YKA3	R410A	2088	7.1	14.83	3.6	7.52
	PUHZ-ZRP250YKA3	R410A	2088	7.7	16.08	4.8	10.03
	PUZ-M100VKA	R32	675	3.1	2.09	4.1	2.77
	PUZ-M100YKA	R32	675	3.1	2.09	4.1	2.77
	PUZ-M125VKA	R32	675	3.6	2.43	5.0	3.38
	PUZ-M125YKA	R32	675	3.6	2.43	5.0	3.38
	PUZ-M140VKA	R32	675	3.6	2.43	5.0	3.38
	PUZ-M140YKA	R32	675	3.6	2.43	5.0	3.38
	PUZ-M200YKA	R32	675	5.6	3.78	7.2	4.86
	PUZ-M250YKA	R32	675	6.8	4.59	9.2	6.21
	PUHZ-P100VKA	R410A	2088	3.3	6.89	1.2	2.51
	PUHZ-P100YKA	R410A	2088	3.3	6.89	1.2	2.51
	PUHZ-P125VKA	R410A	2088	3.8	7.93	1.2	2.51
	PUHZ-P125YKA	R410A	2088	3.8	7.93	1.2	2.51
	PUHZ-P140VKA	R410A	2088	3.8	7.93	1.2	2.51
	PUHZ-P140YKA	R410A	2088	3.8	7.93	1.2	2.51
	PUHZ-P200YKA3	R410A	2088	6.5	13.58	3.6	7.52
	PUHZ-P250YKA3	R410A	2088	7.7	16.08	4.8	10.03
	PUHZ-SHW112VHA	R410A	2088	5.5	11.49	2.4	5.02
	PUHZ-SHW112YHA	R410A	2088	5.5	11.49	2.4	5.02
	PUHZ-SHW140VHA	R410A	2088	5.5	11.49	2.4	5.02
	PUHZ-SHW140YHA	R410A	2088	5.5	11.49	2.4	5.02
	PUHZ-FRP71VHA	R410A	2088	3.8	7.94	1.8	3.76
PUMY	PUMY-SP112VKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP112YKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP125VKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP125YKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP140VKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP140YKM(-BS)	R410A	2088	3.5	7.31	9.0	18.79
	PUMY-SP140YKM(E4)-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P125VKM4(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P140VKM4(-BS)	R410A	2088	4.8	10.02	13.8	28.81
	PUMY-P112YKM(E4)-BS)	R410A	2088	4.8	10.02	13.8	28.81
ATW Packaged	PUZ-WM50VHA	R32	675	2.0	1.35	–	–
	PUZ-WM60VAA	R32	675	2.2	1.49	–	–
	PUZ-WM85V/YAA	R32	675	2.2	1.49	–	–
ATW Split	PUZ-WM112V/YAA	R32	675	3.0	2.03	–	–
	SUZ-SWM40VA	R32	675	1.2	0.81	0.4	0.27
	SUZ-SWM60VA	R32	675	1.2	0.81	0.4	0.27
	SUZ-SWM80VA	R32	675	1.2	0.81	0.4	0.27
	PUD-SWM60VAA	R32	675	1.3	0.8775	0.3	0.20
	PUD-SWM80V/YAA	R32	675	1.3	0.8775	0.3	0.20
	PUD-SWM100V/YAA	R32	675	1.6	1.08	0.23	0.16
	PUD-SWM120V/YAA	R32	675	1.6	1.08	0.23	0.16
	PUD-SHWM60VAA	R32	675	1.4	0.945	0.3	0.20
	PUD-SHWM80V/YAA	R32	675	1.4	0.945	0.3	0.20
	PUD-SHWM100V/YAA	R32	675	1.7	1.1475	0.13	0.09
	PUD-SHWM120V/YAA	R32	675	1.7	1.1475	0.13	0.09
	PUD-SHWM140V/YAA	R32	675	1.7	1.1475	0.13	0.09
	PUHZ-SW75V/YAA	R410A	2088	3.0	6.27	1.8	3.76
	PUHZ-SW100V/YAA	R410A	2088	4.2	8.77	1.6	3.76
	PUHZ-SW120V/YHA	R410A	2088	4.6	9.61	2.9	6.06
	PUHZ-SW160YKA	R410A	2088	7.1	14.83	4.0	8.36
	PUHZ-SW200YKA	R410A	2088	7.7	16.08	5.2	8.36
	PUHZ-SW80V/YAA	R410A	2088	4.6	9.61	1.4	2.93
PUHZ-SHW112V/YAA	R410A	2088	4.6	9.61	1.4	2.93	
PUHZ-SHW140YHA	R410A	2088	5.5	11.49	2.4	5.02	
Mr. Slim+	PUHZ-SHW230YKA2	R410A	2088	7.1	14.83	8.4	17.54
	PUHZ-FRP71VHA2	R410A	2088	3.8	7.94	1.8	3.76

R32 REFRIGERANT

R32 REFRIGERANT PROPERTIES

Under the conditions shown below, there is a possibility that R32 could ignite.

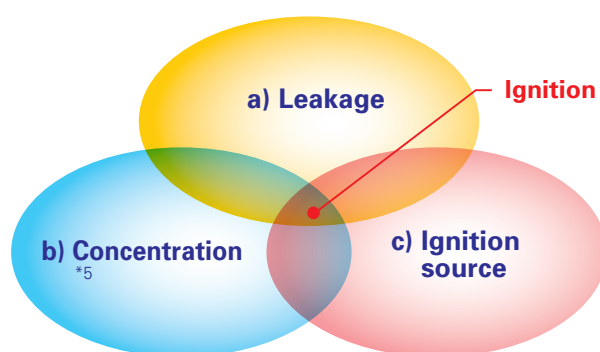

	R32	R410A	R22
Chemical formula	CH ₂ F ₂	CH ₂ F ₂ /CHF ₂ CF ₃	CHClF ₂
Composition (blend ratio wt. %)	Single composition	R32/R125 (50/50 wt %)	Single composition
Ozone depletion potential (ODP)	0	0	0.055
Global warming potential (GWP) *1	675	2088	1810
LFL(vol.%) *2	13.3	–	–
UFL(vol.%) *3	29.3	–	–
Flammability *4	Lower flammability (2L)	No flame propagation (1)	No flame propagation (1)

*1 IPCC 4th assessment report.

*2 LFL : Lower flammable limit

*3 UFL : Upper flammable limit

*4 ISO 817:2014

*5 R32 consistency is higher than LFL*1 and lower than UFL*2.

Although R32 is classified as low flammability, the possibility of igniting can be eliminated by ensuring the following three points.

a) Do not leak refrigerant.

<Installation> ·Vacuum drying should be done. Air purging is prohibited.

·Follow “4. Installation Points of Refrigerant Piping Work”.

<Repair/Relocation/Removal> ·Pump down or recovering refrigerant should be done.

b) Prevent concentration.

·Ventilate during installation and servicing, such as open the door or window and use a fan.

·Follow “2. Installation Restrictions”.

c) Keep ignition source away from the unit.

·Do not braze pipe and unit which contain refrigerant. Before brazing, refrigerant should be recovered.

·Do not install unit while the electricity is turned on. Turn off electricity at the fuse box and check the wiring using a tester.

·Do not smoke when working or during transportation of the product.

Note

Both R32 / R410A emit a toxic gas when coming into contact with an open flame.

INSTALLATION RESTRICTIONS

In order to prevent the refrigerant from igniting, use the following instructions during installation.

1) Indoor Units

Install in a room with a floor area of A_{min}^* or more, corresponding to refrigerant quantity M.

(M = factory-charged refrigerant + locally added refrigerant)

Install the indoor unit so that the height from the floor to the bottom of the indoor unit is hO^* .

* Refer to table and drawings below.

<M & P Series>


M[kg]	$A_{min}[m^2]$
1.0	4
1.5	6
2.0	8
2.5	10
3.0	12
3.5	14
4.0	16
4.5	20
5.0	24
5.5	29
6.0	35
6.5	41
7.0	47
7.5	54

<MXZ Series>

M[kg]	$A_{min}[m^2]$
1.0	3
1.5	4.5
2.0	6
2.5	7.5
3.0	9
3.5	12
4.0	15.5
4.5	20
5.0	24
5.5	29
6.0	35
6.5	41
7.0	47
7.5	54


<Only for MFZ-KT>

M[kg]	$A_{min}[m^2]$
1.00	No requirements
1.50	
1.80	
1.84	3.63
1.90	3.75
2.00	3.95
2.10	4.15
2.20	4.34
2.30	4.54
2.40	4.74

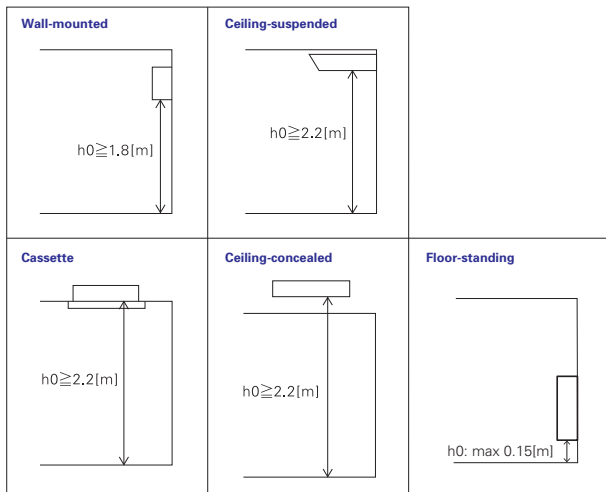

2) Outdoor Units

Install outdoor units in a place where at least one of the four sides is open or in a sufficiently large space without depressions.

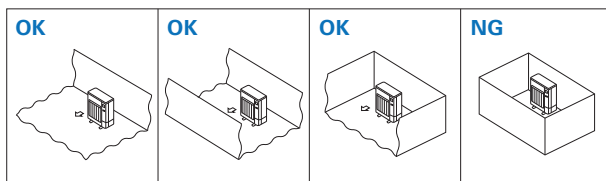


If you unavoidably install a unit in a space where all four sides are blocked or there are depressions, confirm that one of these situations (A, B or C) is satisfied.

A Secure sufficient installation space (minimum installation area A_{min}).


Install in a space with an installation area of A_{min}^* or more, corresponding to refrigerant quantity M. (M = factory-charged refrigerant + locally added refrigerant)

* Refer to table and drawings below.

M[kg]	$A_{min}[m^2]$
1.0	12
1.5	17
2.0	23
2.5	28
3.0	34
3.5	39
4.0	45
4.5	50
5.0	56
5.5	62
6.0	67
6.5	73
7.0	78
7.5	84




B Install in a space with a depression height of $\leq 0.125[m]$.

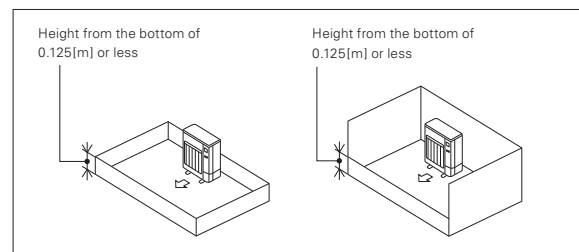

C Create an appropriate open ventilation area.


Make sure that the width of the open area is 0.9[m] or more and the height of the open area is 0.15[m] or more. However, the height from the bottom of the installation space to the bottom edge of the open area should be 0.125[m] or less. More than 75% of the ventilation area should be open to allow air circulation.

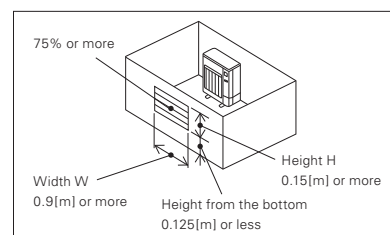








Note These countermeasures (A, B or C) are for keeping safety not for specification guarantee.

● Models with R32 Refrigerant: MSZ-L Series (single connection)

LROSSNAY SYSTEM



LOSSNAY LINEUP

Application		Model	Airflow	50 CMH	100 CMH	150 CMH	250 CMH	350 CMH	500 CMH	650 CMH	800 CMH	1000 CMH	1500 CMH	2000 CMH	2500 CMH
Commercial Use	Centralized Ventilation	LGH-RVX Series				●	●	●	●	●	●	●	●	●	
		LGH-RVXT Series											●	●	●
		GUG Series							●			●			
	Optional Unit	Dx-coil unit for Lossnay LGH-RVX/RVXT Series GUG Series							●	●	●	●	●	●	●
Residential Use	Centralized Ventilation	VL-220CZGV-E					●								
	Decentralized Ventilation	VL-100(E)U ₅ -E			●										
		VL-50(E)S ₂ -E VL-50SR ₂ -E		●											

LGH-RVX Series

A commercially oriented system that can be used to deliver high performance and functions virtually anywhere.

LGH-RVXT Series

Thin, large airflow models of the LGH series that deliver high performance and functions.

Dx-coil unit (GUG Series)

Temperature control equipment that works with Lossnay units and Mr. Slim outdoor units.

GUG Series

Heat recovery units with a heating and cooling system that uses the City Multi outdoor unit as a heat source.

VL-220CZGV-E


Centralized ventilation with sensible heat exchange, for residential use.

VL-100(E)U₅-E, VL-50(E)S₂-E, VL-50SR₂-E


Wall-mounted models. Particularly suitable for houses and small offices.

REMOTE CONTROLLER

PZ-61DR-E



PZ-43SMF-E



Function (Communicating mode)	PZ-61DR-E		PZ-43SMF-E	
	LGH-RVX/RVXT	VL-220CZGV-E	LGH-RVX/RVXT	VL-220CZGV-E
Fan speed selection	4 fan speeds	4 fan speeds	2 of 4 fan speeds	2 of 4 fan speeds
Ventilation mode selection	Energy recovery / Bypass / Auto	Heat recovery / Bypass / Auto (available with optional part P-133DUE-E)	Energy recovery / Bypass / Auto	Heat recovery / Bypass / Auto (available with optional part P-133DUE-E)
Night-purge setting (time and fan speed)	Yes	No	No	No
Function setting from RC	Yes	Yes	No	No
Bypass temp. free setting	Yes	Yes (available with optional part P-133DUE-E)	No	No
Heater-On temp. free setting	Yes	No	No	No
Fan power change after installation	Yes	Yes	No	No
ON/OFF timer	Yes	Yes	Yes	Yes
Auto-Off timer	Yes	Yes	No	No
Weekly timer	Yes	Yes	No	No
Operation restrictions (ON/OFF, ventilation mode, fan speed)	Yes	Yes (ventilation mode is available with optional part P-133DUE-E)	No	No
Operation restrictions (fan speed skip setting)	Yes	Yes	No	No
Screen contrast adjustment	Yes	Yes	No	No
Language selection	Yes (8 languages)	Yes (8 languages)	No (English only)	No (English only)
Initializing	Yes	Yes	No	No
Filter cleaning sign	Yes	Yes	Yes	Yes
Lossnay core cleaning sign	Yes	No	No	No
Error indication	Yes	Yes	Yes	Yes
Error history	Yes	Yes	No	No

LOSSNAY SYSTEM



Lossnay ventilation systems are renowned industry-wide for their efficiency. They offer environment-friendly energy recovery and humidity control, and enable air conditioning systems to simultaneously provide optimum room comfort and energy savings.



Indoor Air Quality Inside a Building is Optimized Through Temperature and Humidity Exchange by Lossnay

Lossnay is a total heat exchange ventilation system that uses paper characteristics to perform temperature (sensible heat) and humidity (latent heat) exchange.

● The concept of sensible heat and latent heat exchange using Lossnay core

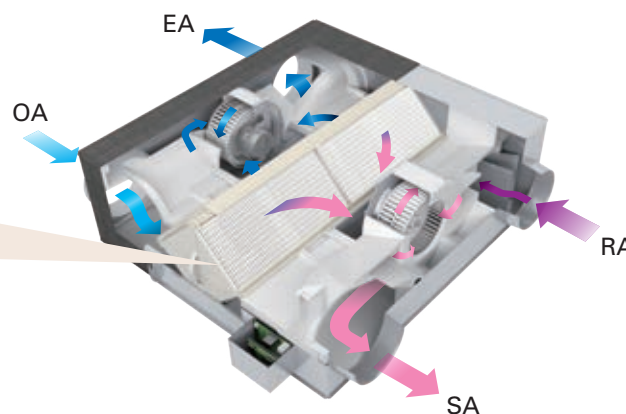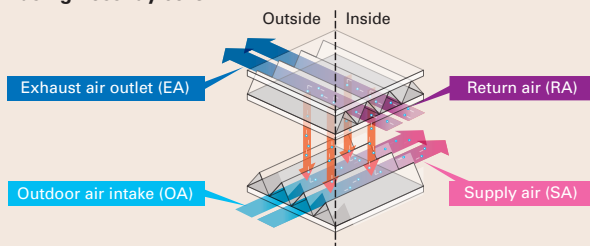


What Can Be Improved by Introducing Lossnay?

● Ventilation with maximized comfort

In summer

Air similar to the conditions of cooled (dehumidified) indoor air is supplied.

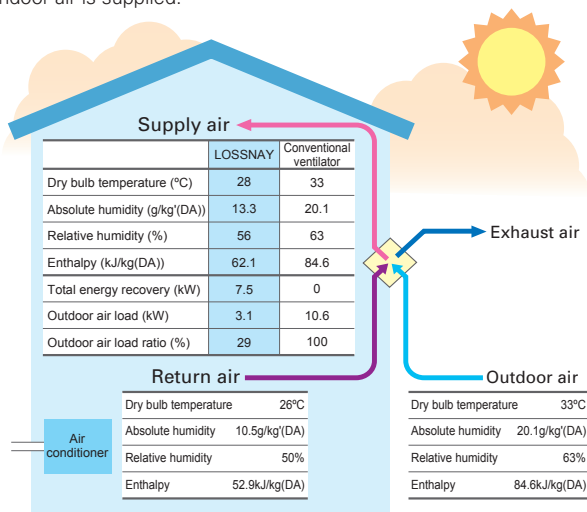


Heat recovery calculation

$$\text{Indoor supply-air temperature (°C)} = \text{Outdoor temperature (°C)} - \left\{ \text{Outdoor temperature (°C)} - \text{Indoor temperature (°C)} \right\} \times \text{Temp recovery efficiency (\%)} \\ \text{Calculation example: } 28^{\circ}\text{C} = 33^{\circ}\text{C} - (33^{\circ}\text{C} - 26^{\circ}\text{C}) \times 71.5\%$$

*The above applies to the case of LGH-100RVX (fan speed 4).

In winter

Air similar to the conditions of heated (humidified) indoor air is supplied.

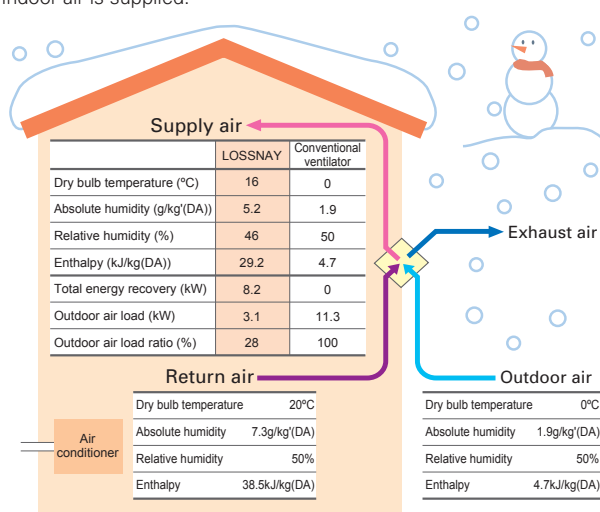

Heat recovery calculation

$$\text{Indoor supply-air temperature (°C)} = \left\{ \text{Indoor temperature (°C)} - \text{Outdoor temperature (°C)} \right\} \times \text{Temp recovery efficiency (\%)} + \text{Outdoor temperature (°C)} \\ \text{Calculation example: } 16^{\circ}\text{C} = (20^{\circ}\text{C} - 0^{\circ}\text{C}) \times 80\% + 0^{\circ}\text{C}$$

*The above applies to the case of LGH-100RVX (fan speed 4).


Commercial Use Lossnay

LGH-RVX Series (Standard model)

Power consumption reduced further with the introduction of a DC motor

Low power consumption is realised with the introduction of a high efficiency brushless DC motor. Compared to models with an AC motor, power consumption is reduced.

Comparison between current and previous power consumption
(Current model: Fan speed 4 at 230V 50Hz, Previous model: Extra-High at 220V 50Hz)

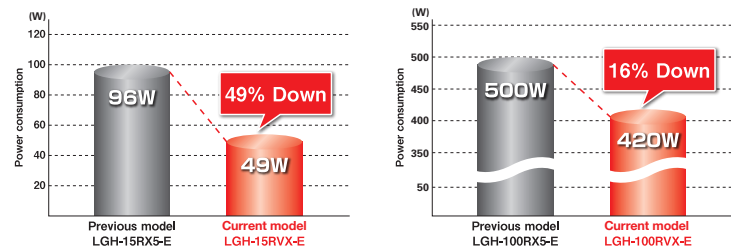

Improved airflow range

Wide airflow range


Each fan speed has a range setting of 25, 50, 75 and 100%, allowing much finer airflow control. When used in combination with the CO₂ sensor or timer function, airflow can be controlled according to conditions that realize better performance and reduce power consumption.

Fan speed adjustment function


The default fan speed value can be adjusted slightly. Use the PZ-61DR-E remote controller to reset the speed.

- 1) Considering the total hours of Lossnay operation (filter clogging), fan power can be adjusted automatically after a given period of time.
- 2) After the unit is installed, fine adjustments can be made if the airflow is slightly lower than the desired airflow.

■ Characteristic curves of the LGH-RVX/RVXT Series

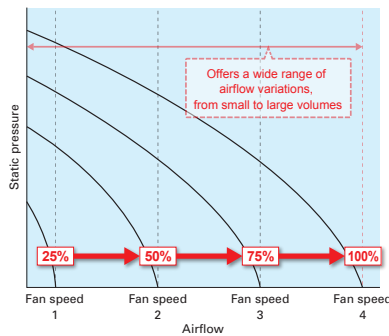

■ P-Q curve image

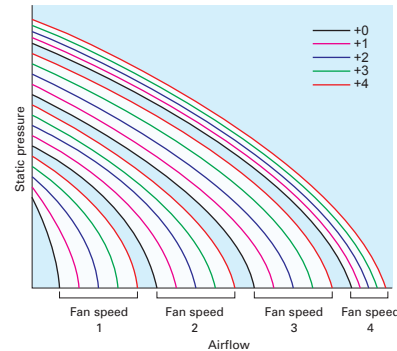

LGH-RVXT Series (Thin body type)


The LGH-RVXT series has a large airflow of 1500 - 2500 CMH but a thin body of approximately 500mm. Therefore, installing the unit in the ceiling is easy.

■ LGH-150/200RVX-E



Height: 808mm


■ LGH-150/200/250RVXT-E



Height: 500mm


38%
Thinner
body

■ LGH-RVXT installation image

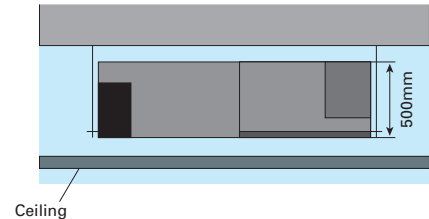

GUF Series (Lossnay with Dx-coil unit)

Along with Lossnay ventilation, the OA processing unit is really two units in one, functioning as the main air conditioner when the load is light and adding supplemental air conditioning when the load is heavy.

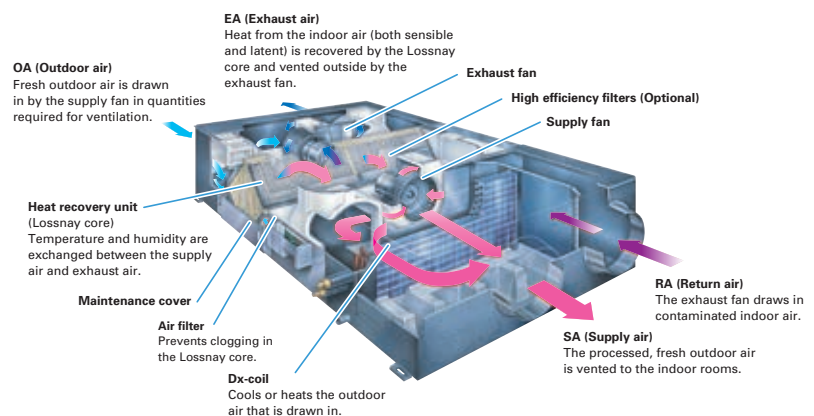


Commercial Use Lossnay Specifications

RVX Series


LGH-15RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		0.40	0.24	0.15	0.10	0.41	0.25	0.15	0.10
Input power (W)		49	28	14	7	52	28	14	8
Airflow	(m³/h)	150	113	75	38	150	113	75	38
	(L/s)	42	31	21	10	42	31	21	10
External static pressure (Pa)		95	54	24	6	95	54	24	6
Temperature exchange efficiency (%)		80	81	83	84	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	73	75.5	78	79	—	—	—	—
	Cooling	71	74.5	78	79	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		28	24	19	17	29	24	19	18
Weight (kg)		20							
Specific energy consumption class		A							

Characteristic Curves

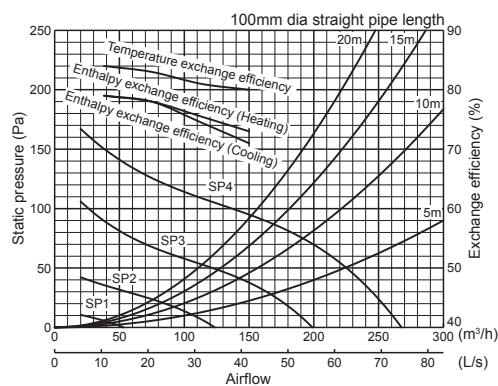

Dimensions

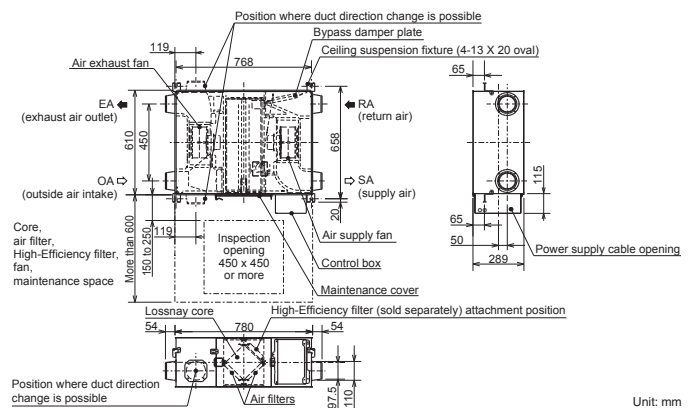


Unit: mm


LGH-25RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		0.48	0.28	0.16	0.10	0.48	0.29	0.16	0.11
Input power (W)		62	33	16	7.5	63	35	17	9
Airflow	(m ³ /h)	250	188	125	63	250	188	125	63
	(L/s)	69	52	35	17	69	52	35	17
External static pressure (Pa)		85	48	21	5	85	48	21	5
Temperature exchange efficiency (%)		79	80	82	86	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	69.5	72	76	83	—	—	—	—
	Cooling	68	70	74.5	83	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		27	22	20	17	27.5	23	20	17
Weight (kg)		23							
Specific energy consumption class		A							

Characteristic Curves

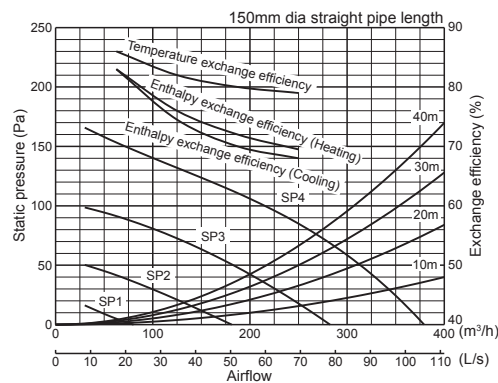

Dimensions

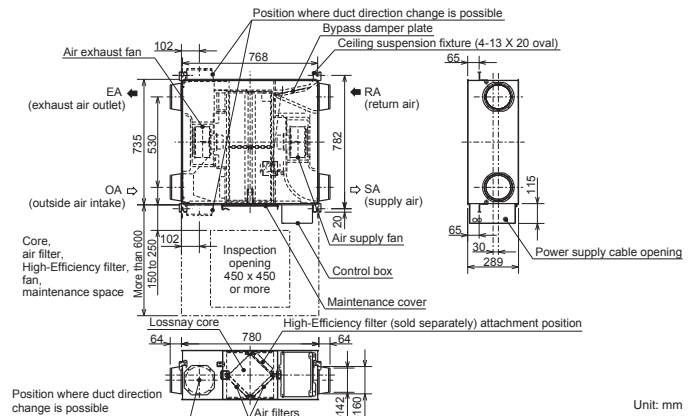

Unit: mm

■ For LGH-RVX and LGH-RVXT series

* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.


* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

* For specifications at other frequencies, contact your dealer.


LGH-35RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz							
Ventilation mode	Heat recovery mode				Bypass mode			
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)	0.98	0.54	0.26	0.12	0.98	0.56	0.28	0.13
Input power (W)	140	70	31	11	145	72	35	13
Airflow	350	263	175	88	350	263	175	88
(m ³ /h)								
(L/s)	97	73	49	24	97	73	49	24
External static pressure (Pa)	160	90	40	10	160	90	40	10
Temperature exchange efficiency (%)	80	82.5	86	88.5	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	71.5	74	78.5	83.5	—	—	—
	Cooling	71	73	78	82	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	32	28	20	17	32.5	28	20	18
Weight (kg)	30							

Characteristic Curves

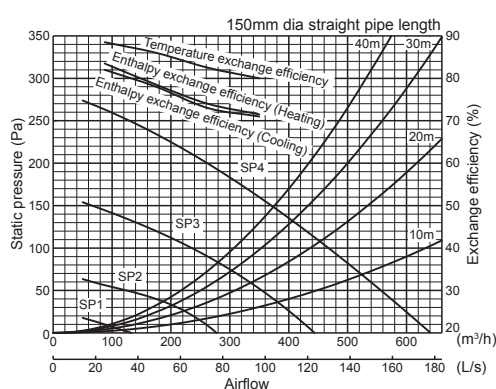

Dimensions

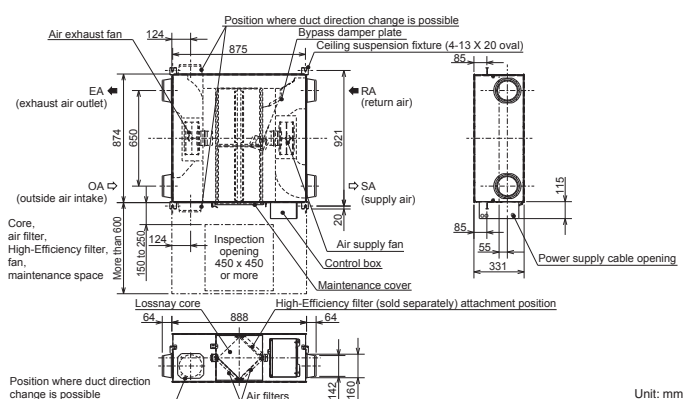


Unit: mm


LGH-50RVX-E

Electrical power supply	220-240V/50Hz, 220V/60Hz							
Ventilation mode	Heat recovery mode				Bypass mode			
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)	1.15	0.59	0.26	0.13	1.15	0.59	0.27	0.13
Input power (W)	165	78	32	12	173	81	35	14
Airflow	500	375	250	125	500	375	250	125
(m ³ /h)								
(L/s)	139	104	69	35	139	104	69	35
External static pressure (Pa)	120	68	30	8	120	68	30	8
Temperature exchange efficiency (%)	78	81	83.5	87	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	69	71	75	82.5	—	—	—
	Cooling	66.5	68	72.5	82	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)	34	28	19	18	35	29	20	18
Weight (kg)	33							

Characteristic Curves

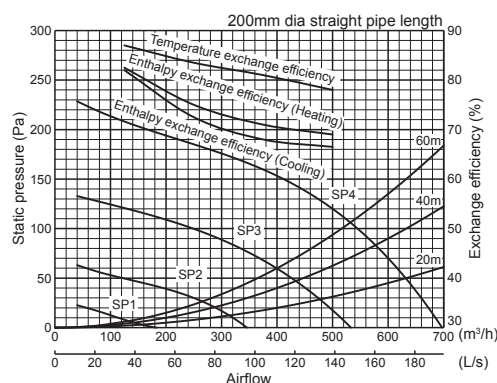

Dimensions

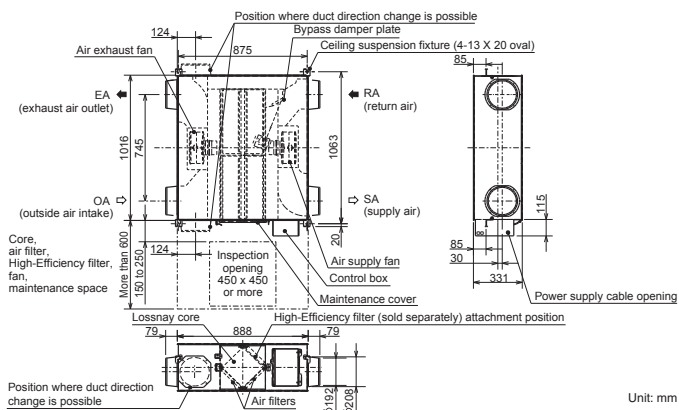

Unit: mm

■ For LGH-RVX and LGH-RVXT series

* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.

* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.


* For specifications at other frequencies, contact your dealer.

Commercial Use Lossnay Specifications


LGH-65RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		1.65	0.90	0.39	0.15	1.72	0.86	0.38	0.16
Input power (W)		252	131	49	15	262	131	47	17
Airflow	(m ³ /h)	650	488	325	163	650	488	325	163
	(L/s)	181	135	90	45	181	135	90	45
External static pressure (Pa)		120	68	30	8	120	68	30	8
Temperature exchange efficiency (%)		77	81	84	86	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	68.5	71	76	82	—	—	—	—
	Cooling	66	69.5	74	81	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		34.5	29	22	18	35.5	29	22	18
Weight (kg)		38							

Characteristic Curves

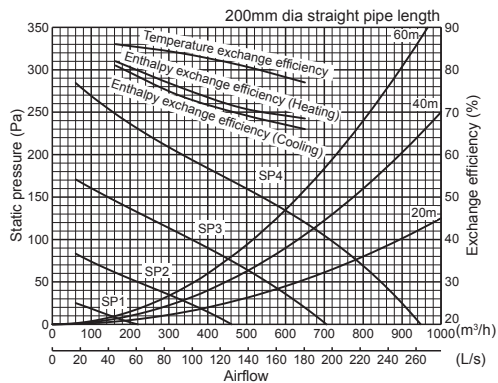


Dimensions

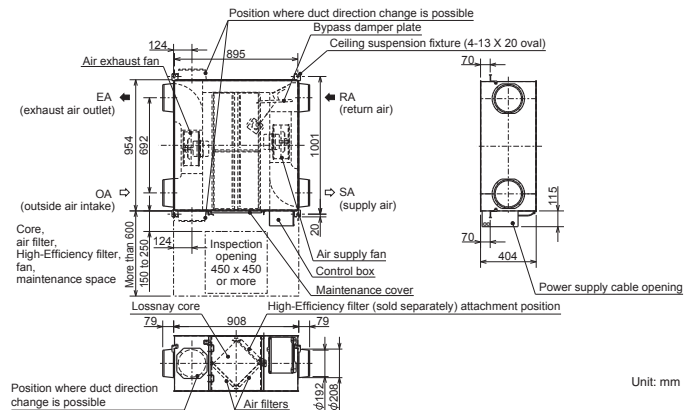


LGH-80RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		1.82	0.83	0.36	0.15	1.97	0.86	0.40	0.15
Input power (W)		335	151	60	18	340	151	64	20
Airflow	(m ³ /h)	800	600	400	200	800	600	400	200
	(L/s)	222	167	111	56	222	167	111	56
External static pressure (Pa)		150	85	38	10	150	85	38	10
Temperature exchange efficiency (%)		79	82.5	84	85	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	71	73.5	78	81	—	—	—	—
	Cooling	70	72.5	78	81	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		34.5	30	23	18	36	30	23	18
Weight (kg)		48							

Characteristic Curves

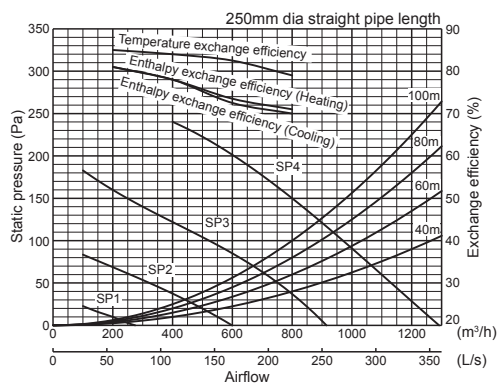

Dimensions

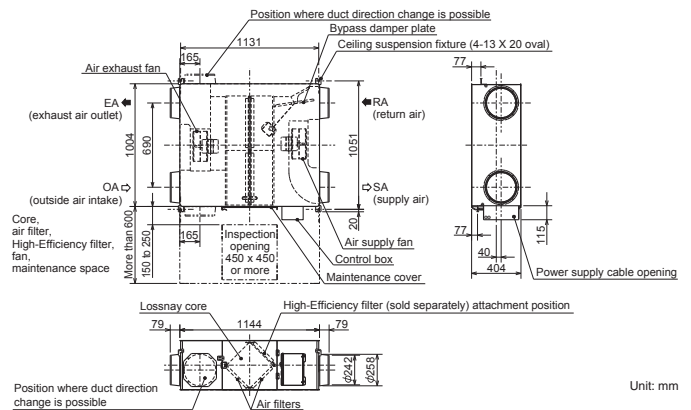

■ For LGH-RVX and LGH-RVXT series

* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.


* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

* For specifications at other frequencies, contact your dealer.


LGH-100RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		2.50	1.20	0.50	0.17	2.50	1.20	0.51	0.19
Input power (W)		420	200	75	21	420	200	75	23
Airflow	(m ³ /h)	1000	750	500	250	1000	750	500	250
	(L/s)	278	208	139	69	278	208	139	69
External static pressure (Pa)		170	96	43	11	170	96	43	11
Temperature exchange efficiency (%)		80	83	86.5	89.5	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	72.5	74	78	87	—	—	—	—
	Cooling	71	73	77	85.5	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		37	31	23	18	38	32	24	18
Weight (kg)		54							

Characteristic Curves

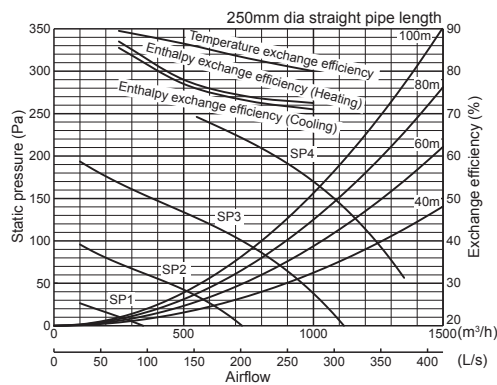

Dimensions

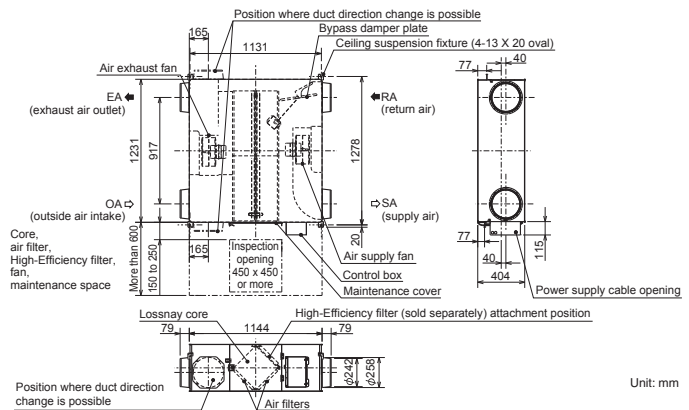


Unit: mm


LGH-150RVX-E

Electrical power supply		220-240V/50Hz, 220V/60Hz							
Ventilation mode		Heat recovery mode				Bypass mode			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Running current (A)		3.71	1.75	0.70	0.29	3.85	1.78	0.78	0.30
Input power (W)		670	311	123	38	698	311	124	44
Airflow	(m ³ /h)	1500	1125	750	375	1500	1125	750	375
	(L/s)	417	313	208	104	417	313	208	104
External static pressure (Pa)		175	98	44	11	175	98	44	11
Temperature exchange efficiency (%)		80	82.5	84	85	—	—	—	—
Enthalpy exchange efficiency (%)	Heating	72	73.5	78	81	—	—	—	—
	Cooling	70.5	72.5	78	81	—	—	—	—
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		39	32	24	18	40.5	33	26	18
Weight (kg)		96							

Characteristic Curves

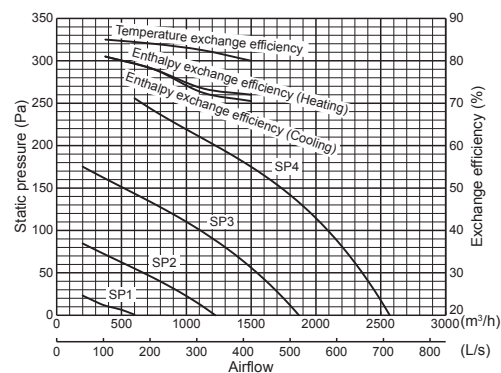

Dimensions

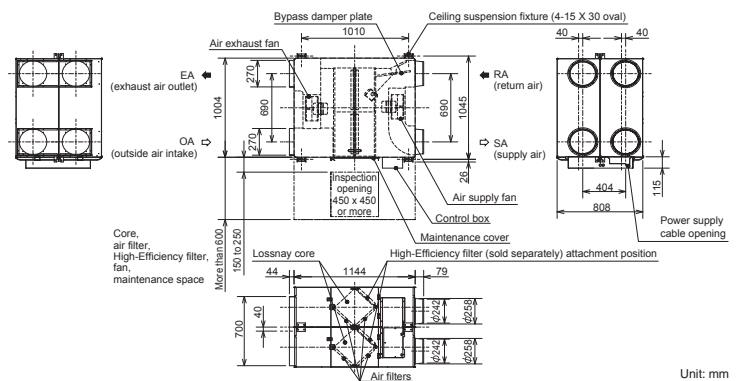

Unit: mm

■ For LGH-RVX and LGH-RVXT series

* The running current, the input power, the efficiency and the noise are based on the rated airflow, 230V/50Hz, and 220V/60Hz.

* Figures in the chart is measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

* For specifications at other frequencies, contact your dealer.


Commercial Use Lossnay Specifications

GUF Series


GUF-50RD4

Electrical power supply		220-240V/50Hz			
Ventilation mode		Heat recovery mode		Bypass mode	
Fan speed		High	Low	High	Low
Running current (A)		1.15	0.70	1.15	0.70
Input power (W)		235-265	150-165	235-265	150-165
Airflow	(m³/h)	500	400	500	400
	(L/s)	139	111	139	111
External static pressure (Pa)		140	90	140	90
Temperature exchange efficiency (%)		77.5	80	—	—
Enthalpy exchange efficiency (%)	Heating	68	71	—	—
	Cooling	65	67	—	—
Cooling capacity (kW)		5.57 (1.94)			
Heating capacity (kW)		6.21 (2.04)			
Capacity equivalent to the indoor unit		P32			
Humidifier	Humidifying	—			
	Humidifying capacity (kg/h)	—			
	Water supply pressure	—			
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		33.5-34.5	29.5-30.5	35-36	29.5-30.5
Weight (kg)		48			

Characteristic Curves

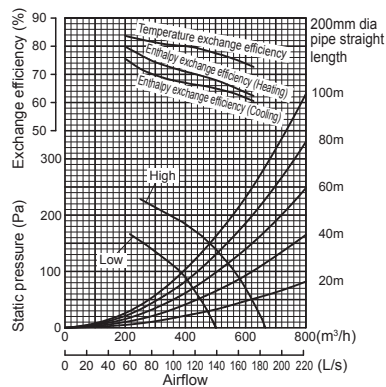


Dimensions

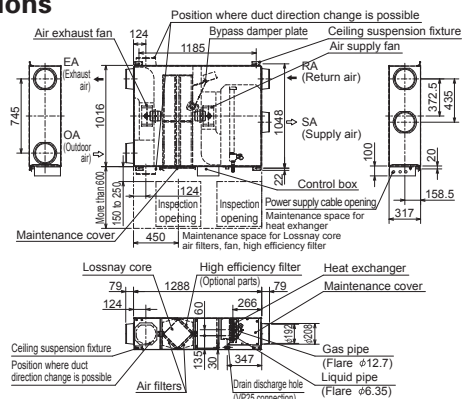


GUF-100RD4

Electrical power supply		220-240V/50Hz			
Ventilation mode		Heat recovery mode		Bypass mode	
Fan speed		High	Low	High	Low
Running current (A)		2.20	1.73	2.25	1.77
Input power (W)		480-505	370-395	490-515	385-410
Airflow	(m³/h)	1000	800	1000	800
	(L/s)	278	222	278	222
External static pressure (Pa)		140	90	140	90
Temperature exchange efficiency (%)		79.5	81.5	—	—
Enthalpy exchange efficiency (%)	Heating	71	74	—	—
	Cooling	69	71	—	—
Cooling capacity (kW)		11.44 (4.12)			
Heating capacity (kW)		12.56 (4.26)			
Capacity equivalent to the indoor unit		P63			
Humidifier	Humidifying	—			
	Humidifying capacity (kg/h)	—			
	Water supply pressure	—			
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		38-39	34-35	38-39	35-36
Weight (kg)		82			

Characteristic Curves

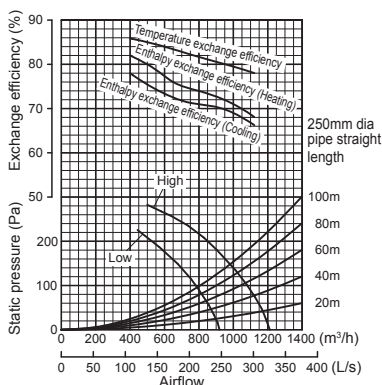

Dimensions

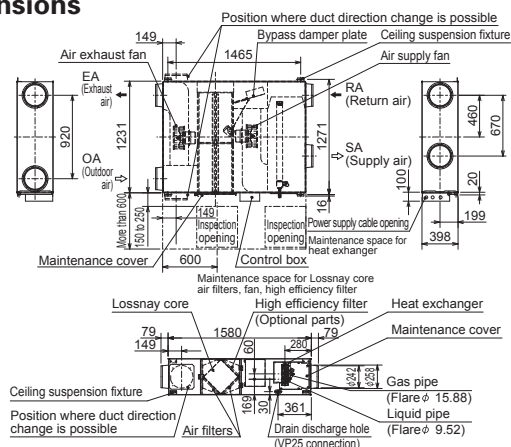

■ For GUF series

*Cooling/Heating capacity indicates the maximum value at operation under the following condition.

Cooling: Indoor: 27°C DB/19°C WB Outdoor: 35°C DB/24°C WB

Heating: Indoor: 20°C DB/13.8°C WB Outdoor: 7°C DB/6°C WB


*The figures in () indicates heat recovering capacity of heat exchanger core.

*Figures in the chart are measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.


GUF-50RDH4

		220-240V/50Hz			
Electrical power supply		Heat recovery mode		Bypass mode	
Ventilation mode					
Fan speed		High	Low	High	Low
Running current (A)		1.15	0.70	1.15	0.70
Input power (W)		235-265	150-165	235-265	150-165
Airflow	(m³/h)	500	400	500	400
	(L/s)	139	111	139	111
External static pressure (Pa)		125	80	125	80
Temperature exchange efficiency (%)		77.5	80	—	—
Enthalpy exchange efficiency (%)	Heating	68	71	—	—
	Cooling	65	67	—	—
Cooling capacity (kW)		5.57 (1.94)			
Heating capacity (kW)		6.21 (2.04)			
Capacity equivalent to the indoor unit		P32			
Humidifier	Humidifying	Permeable film humidifier			
	Humidifying capacity (kg/h)	2.7 (heating)			
	Water supply pressure	Minimum pressure : 2.0 × 10⁴Pa Maximum pressure : 49.0 × 10⁴Pa			
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		33.5-34.5	29.5-30.5	35-36	29.5-30.5
Weight (kg)		51 (filled with water 55)			

Characteristic Curves

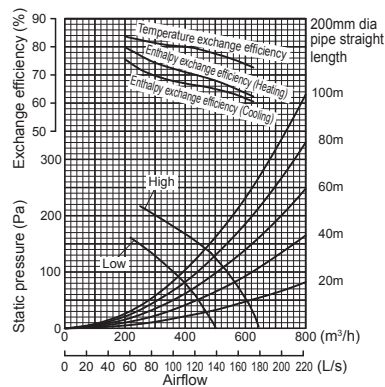


Dimensions

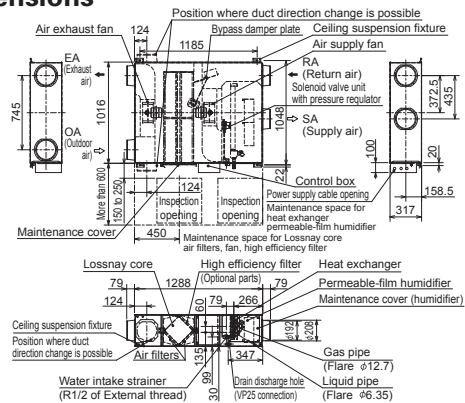


GUF-100RDH4

		220-240V/50Hz			
Electrical power supply		Heat recovery mode		Bypass mode	
Ventilation mode					
Fan speed		High	Low	High	Low
Running current (A)		2.20	1.76	2.25	1.77
Input power (W)		480-505	385-400	490-515	385-410
Airflow	(m³/h)	1000	800	1000	800
	(L/s)	278	222	278	222
External static pressure (Pa)		135	86	135	86
Temperature exchange efficiency (%)		79.5	81.5	—	—
Enthalpy exchange efficiency (%)	Heating	71	74	—	—
	Cooling	69	71	—	—
Cooling capacity (kW)		11.44 (4.12)			
Heating capacity (kW)		12.56 (4.26)			
Capacity equivalent to the indoor unit		P63			
Humidifier	Humidifying	Permeable film humidifier			
	Humidifying capacity (kg/h)	5.4 (heating)			
	Water supply pressure	Minimum pressure : 2.0 × 10⁴Pa Maximum pressure : 49.0 × 10⁴Pa			
Noise (dB) (Measured at 1.5m under the center of the unit in an anechoic chamber)		38-39	34-35	38-39	35-36
Weight (kg)		88 (filled with water 96)			

Characteristic Curves

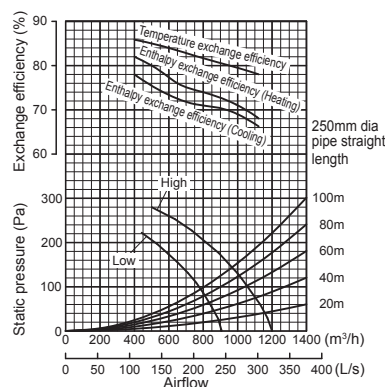

Dimensions

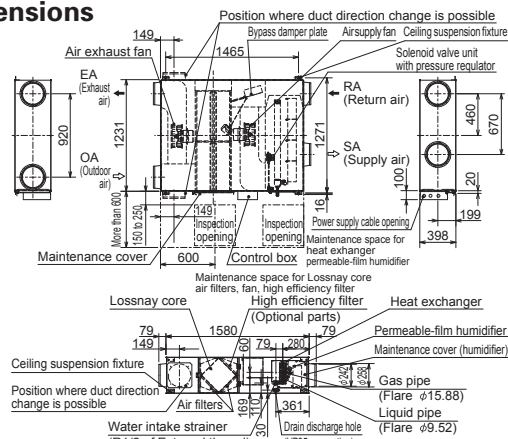

■ For GUF series

*Cooling/Heating capacity indicates the maximum value at operation under the following condition.

Cooling: Indoor: 27°C DB/19°C WB Outdoor: 35°C DB/24°C WB

Heating: Indoor: 20°C DB/13.8°C WB Outdoor: 7°C DB/6°C WB

*The figures in () indicates heat recovering capacity of heat exchange core.

*Figures in the chart are measured according to Japan Industrial Standard (JIS B 8628). Characteristic Curves are measured by chamber method.

Optimized System Integration

Improved Installation Appearance

Full-dot backlit LCD makes it easy to see and control the unit.

Previous remote controller



PZ-60DR-E



Current remote controller



PZ-61DR-E

List of Remote Controller Settings and Functions


The remote controller provides a wide range of functions and features in addition to the main functions described below, such as sophisticated energy saving control and easy user interface.

Function (Communicating mode)	PZ-61DR-E	PZ-43SMF-E
Fan speed selection	4 fan speeds	2 of 4 fan speeds
Ventilation mode selection	Energy recovery / Bypass / Auto	Energy recovery / Bypass / Auto
Night-purge setting (time and fan speed)	Yes	No
Function setting from RC	Yes	No
Bypass temp. free setting	Yes	No
Heater-On temp. free setting	Yes	No
Fan power up after installation	Yes	No
0 - 10VDC external input	Yes	Yes
ON/OFF timer	Yes	Yes
Auto-Off timer	Yes	No
Weekly timer	Yes	No
Operation restrictions (ON/OFF, Ventilation mode, fan speed)	Yes	No
Operation restrictions (Fan speed skip setting)	Yes	No
Screen contrast adjustment	Yes	No
Language selection	Yes (8 languages)*	No (English only)
Initializing	Yes	No
Filter cleaning sign	Yes	Yes
Lossnay core cleaning sign	Yes	No
Error indication	Yes	Yes
Error history	Yes	No
OA/RA/SA temp. display	Yes	No

*The 8 languages are English, German, French, Spanish, Italian, Portuguese, Russian and Swedish.


Controllers

Lossnay Remote Controller (PZ-61DR-E)

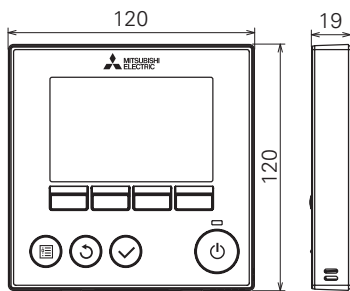


Unit: mm

Operation section




Display section




- (1) Press to turn ON/OFF the Lossnay unit.
- (2) Press to save the setting.
- (3) Press to return to the previous screen.
- (4) Press to bring up the Main menu.
- (5) Operation settings will appear.
When the backlight is off, pressing any button turns the backlight on and it will stay lit for a certain period of time depending on the screen.
- (6) This lamp lights up in green while the unit is in operation. It blinks while the remote controller is starting up or when there is an error.
- (7) Main menu: Press to move the cursor down.
- (8) Main display: Press to change the fan speed.
Main menu: Press to move the cursor up.
- (9) Main display: Press to change the ventilation mode.
Main menu: Press to go to the previous page.
- (10) Main menu: Press to go to the next page.
- (11) Lossnay is always displayed.
- (12) Current time appears here.
- (13) Fan speed setting appears here.
- (14) Functions of the corresponding buttons appear here.
- (15) Appears when the ON/OFF operation is centrally controlled.
- (16) Appears when the filter reset function is centrally controlled.
- (17) Indicates when the filter and/or Lossnay core needs maintenance.
- (18) Appears when the buttons are locked and/or a fan speed is skipped.
- (9) Appears when the On/Off timer or Auto-off timer function is enabled.
- (10) Appears when the Weekly timer is enabled.
- (11) Appears when the night-purge function is available.
- (12) Appears when performing operation to protect the equipment.
- (13) Appears when performing the power supply/exhaust function or the delay operation at the start of operation.
- (14) Indicates the ventilation mode setting.
- (15) Appears when external fan speed operation.
- (16) Appears when operation is interlocked with the external unit.
- (17) Appears when external ventilation mode operation.
- (18) Displays the outdoor temperature, return temperature, and supply temperature (calculated value).

Lossnay Remote Controller (PZ-43SMF-E)

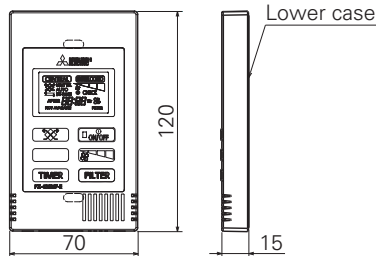

Unit: mm



- (1) Displayed during remote operation is prohibited by the centralized control unit, etc.
- (2) Displays the ventilation mode status.
Heat exchange: HEAT EX
By-pass: BY-PASS
Automatic (HEAT EX/BY-PASS): HEAT EX or AUTO, BY-PASS
(3) Displayed while the Lossnay remote controller is powered on.
- (4) Displays on-timer or off-timer duration.
- (5) When a button is pressed for a function which the Lossnay unit cannot perform, this display flashes concurrently with the display of the function.
- (6) Displayed when the Lossnay starts off by interlocked indoor unit or external signal.
- (7) Displays the selected fan speed.
- (8) Displayed together with the malfunctioning unit (3 digits) and an error code (4 digits).
- (9) Displayed when the accumulated operating time reaches the time set for filter maintenance.
- (10) Used to select the ventilation mode among heat exchange, by-pass or automatic.
- (11) Increasing 0:30 by pressing it once. Keep pressing the button for fast-forwarding.
- (12) Switch for start and stop.
- (13) On during operation. Flashes when a malfunction occurs.
- (14) Used to select the fan speed either "Low" or "High".
Low → High
- (15) Press twice to reset the filter sign display.

Filters

Standard Filters


Replacements for the standard filter supplied with the Lossnay main unit.



Model	Number of filters per set		Applicable model	Filter material	Classification	
	Supply	Exhaust			EN779(2012)	ISO 16890
PZ-15RF ₈ -E	1	1	LGH-15RVX-E	Non-woven fabrics filter	G3	Coarse 35%
PZ-25RF ₈ -E	2	2	LGH-25RVX-E			
PZ-35RF ₈ -E	2	2	LGH-35RVX-E			
PZ-50RF ₈ -E	2	2	LGH-50RVX-E, GUF-50RD4, GUF-50RDH4			
PZ-65RF ₈ -E	2	2	LGH-65RVX-E			
PZ-80RF ₈ -E	2	2	LGH-80RVX-E, LGH-150RVX-E (2 sets)			
PZ-100RF ₈ -E	2	2	LGH-100RVX-E, LGH-200RVX-E (2 sets), GUF-100RD4, GUF-100RDH4			Coarse 50%
PZ-150RTF-E	2	2	LGH-150RVXT-E			
PZ-250RTF-E	2	2	LGH-200RVXT-E, LGH-250RVXT-E			

High-efficiency Filters Optional

These high-efficiency filters can be easily inserted in the Lossnay unit without the need to attach external parts.



Model	Number of filters per set	Applicable model	Filter material	Classification	
	Supply			EN779(2012)	ISO 16890
PZ-15RFM-E	1	LGH-15RVX-E	Noncombustible fiber (polyester, polyolefin)	M6	ePM10 75%
PZ-25RFM-E	2	LGH-25RVX-E			
PZ-35RFM-E	2	LGH-35RVX-E			
PZ-50RFM-E	2	LGH-50RVX-E, GUF-50RD4, GUF-50RDH4			
PZ-65RFM-E	2	LGH-65RVX-E			
PZ-80RFM-E	2	LGH-80RVX-E, LGH-150RVX-E (2 sets)			
PZ-100RFM-E	2	LGH-100RVX-E, LGH-200RVX-E (2 sets), GUF-100RD4, GUF-100RDH4			

Advanced High-efficiency Filters (For the LGH-RVX and GUF Series) Optional

These advanced high-efficiency filters are designed to remove approx. 95% of airborne particulates that are 2.0µm or larger.



Model	Number of filters per set	Applicable model	Filter material	Classification	
	Supply			EN779(2012)	ISO 16890
PZ-15RFP-E	1	LGH-15RVX-E	Noncombustible fiber (polyester, polyolefin)	-	ePM10 70%
PZ-25RFP-E	2	LGH-25RVX-E			
PZ-35RFP-E	2	LGH-35RVX-E			
PZ-50RFP-E	2	LGH-50RVX-E, GUF-50RD4, GUF-50RDH4			
PZ-65RFP-E	2	LGH-65RVX-E			
PZ-80RFP-E	2	LGH-80RVX-E, LGH-150RVX-E (2 sets)			
PZ-100RFP-E	2	LGH-100RVX-E, LGH-200RVX-E (2 sets), GUF-100RD4, GUF-100RDH4			

Advanced High-efficiency Filters (For the LGH-RVXT Series) Optional

These advanced high-efficiency filters can be easily inserted in the Lossnay unit without the need to attach external parts.




Model	Number of filters per set	Applicable model	Filter material	Classification	
				EN779(2012)	ISO 16890
PZ-M6RTFM-E	3	LGH-150RVXT-E, LGH-200RVXT-E, LGH-250RVXT-E	Non-woven fabrics filter	M6	ePM10 75%
PZ-F8RTFM-E				F8	ePM1 65%

Optional Dx-coil Unit for Lossnay




Supply Comfortable Control

Product Features

- Lossnay return air and supply air temperature control are possible by connecting the Dx-coil unit to Mr. Slim (power inverter series).
- Connecting the Dx-coil unit will expand Lossnay's temperature control range (500-2,500 CMH).
Suitable for various applications such as offices, shops and schools etc.

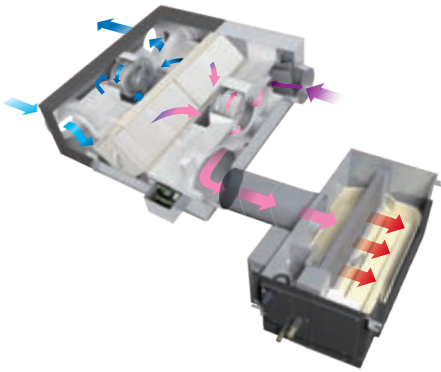


■ Target Applications



Application Examples


Supplemental Air-conditioning System (Return Air Temperature Control)

It may be possible to reduce one air-conditioning unit by adopting return air temperature control.

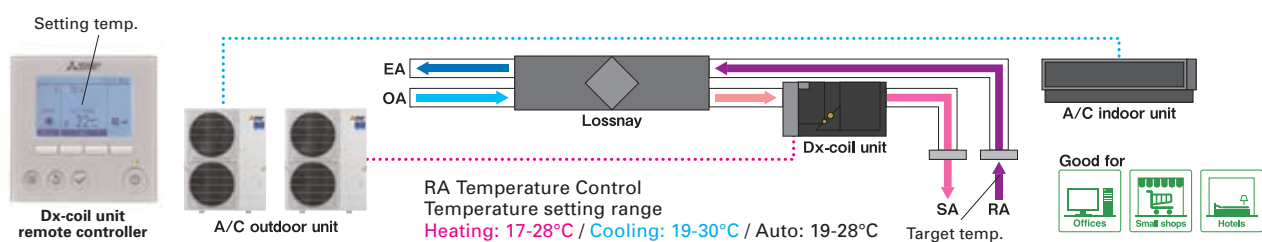


Main Air-conditioning System (Return Air Temperature Control)

Lossnay + Dx-coil unit may be used as the main air-conditioning system and a ventilation system for lower air-conditioning load applications.

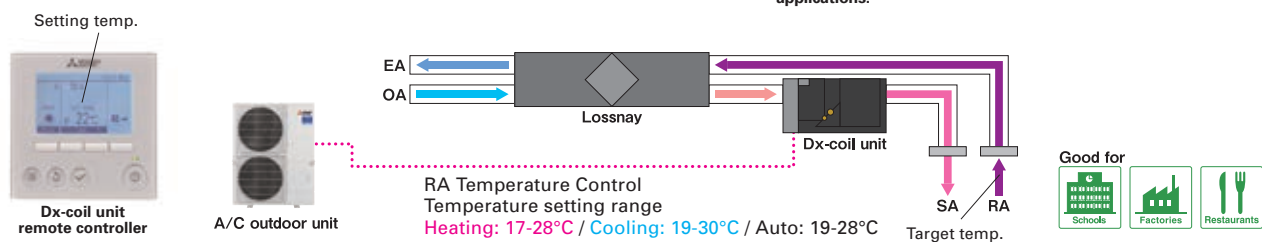


Outdoor Air Treatment System (Supply Air Temperature Control)

Controlling the temperature of outdoor air simplifies air-conditioning design and control.

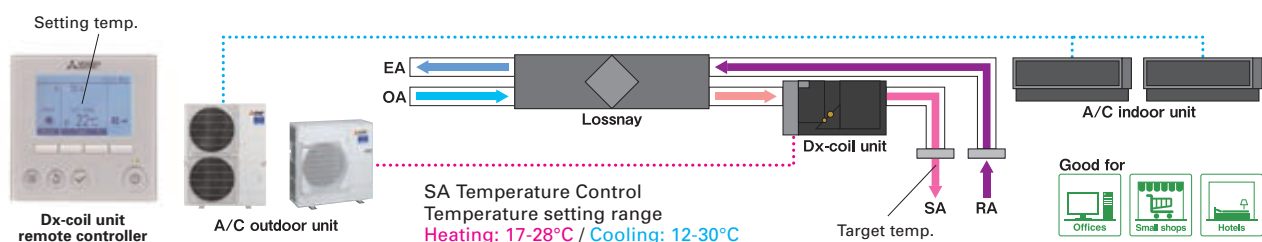


*The above images of using the LGH-RVXT Series are simply examples for reference.

Flexible Installation

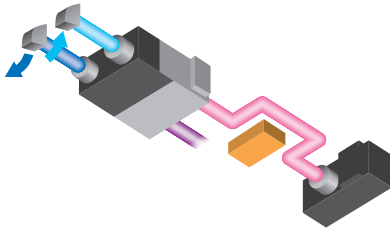

Flexible Connection to Lossnay

The length of the connection cable (accessory) between the Lossnay and Dx-coil unit is about 6m, so flexible installation is possible (two units can be installed close together or far apart with straight or bent ducting).

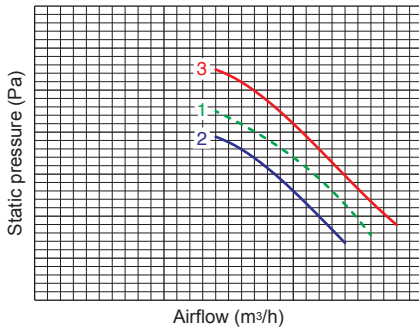

To Keep High Static Pressure


P-Q curve image

1. Lossnay unit
2. Lossnay unit + Dx-coil unit
3. Lossnay unit (fan power-up +4) + Dx-coil unit

Dx-coil unit static pressure loss is kept to a minimum, making it possible to maintain high static pressure using the fan power-up function of the Lossnay. The fan power-up function is only available when used with the PZ-61DR-E Lossnay remote controller.

Drain Pump Equipment


A built-in drain pump makes attaching the drain hose in the ceiling cavity easy, resulting in simple and fast installation.




User-friendly System Control

Flexible Remote Controller Selection

(A) One remote controller

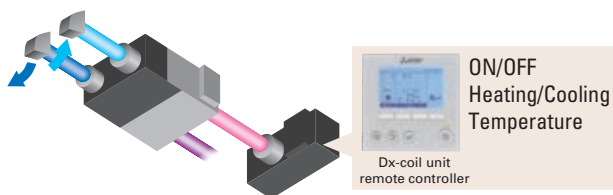

(B) Two remote controllers

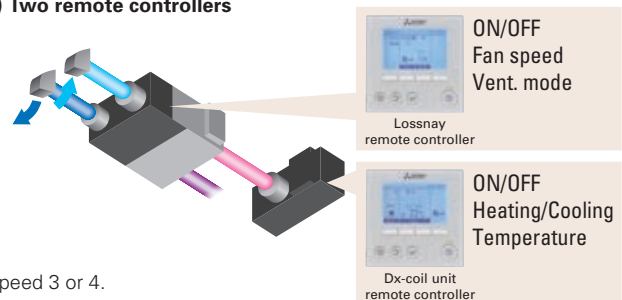

When using only one remote controller, Lossnay fan speed is fixed at fan speed 3 or 4.

When using two remote controllers, all Lossnay functions are available.

*1: Lossnay unit and Dx-coil unit both will synchronously switch on and off.

*2: When one of the two remote controllers is turned ON, the other remote controller turns ON synchronously.

Priority Mode Selection

Temperature priority mode (factory setting) or Fan speed priority mode are selectable when Lossnay unit fan speed is controlled by a CO₂-sensor or a BMS (analog input (0 - 10 VDC) or a volt-free input).

*During fan speed 1 or 2, the Dx-coil unit is always set to thermo-OFF

Operation mode	Fan speed order from external input	Actual fan speed	
		Temp. priority	Fan speed priority
Heating or Cooling	FS4	FS4	FS4
	FS3	FS3	FS3
	FS2	FS3	FS2
	FS1	FS3	FS1
Fan	FS4	FS4	FS4
	FS3	FS3	FS3
	FS2	FS2	FS2
	FS1	FS1	FS1

Specifications



GUG-01SL-E (Connection to LGH-50RVX-E or LGH-65RVX-E)




GUG-01SL-E

Refrigerant	R410A								
Electrical power supply	220-240V / 50Hz, 220V / 60Hz (Supplied from outdoor unit)								
Input power	Heating / Fan: 2.5W, Cooling: 12.4W								
Running current	Less than 0.1A								
Weight	21kg *Accessories: Approx. 1kg								
Function	Heating / Cooling / Auto / Fan *Auto is only available for RA temperature control								
	RA (Return Air) temperature control								
RA (Return Air) temperature control									
Connectable Lossnay unit	LGH-50RVX-E				LGH-65RVX-E				
Capacity [kW]	Heating	6.5 (2.4 + 4.1)				7.7 (3.2 + 4.5)			
	Cooling	5.6 (2.0 + 3.6)				6.6 (2.6 + 4.0)			
SHF	0.66				0.69				
Performance index	Heating	4.09				4.72			
	Cooling	4.69				5.03			
Airflow range at SP3 and SP4	350 - 695 m³/h				350 - 900 m³/h				
Connectable outdoor unit	PUHZ-ZRP35				PUHZ-ZRP35				
Ext. piping	Diameter Liquid / Gas: 6.35 / 12.7				Diameter Liquid / Gas: 6.35 / 12.7				
	Maximum length: 50m, Maximum height: 30m				Maximum length: 50m, Maximum height: 30m				
Ventilation specifications									
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Airflow	[m³/h]	500	375	250	125	650	488	325	163
	[L/s]	139	104	69	35	181	135	90	45
External static pressure [Pa]		105	59	26	7	95	53	24	6

Characteristic Curves

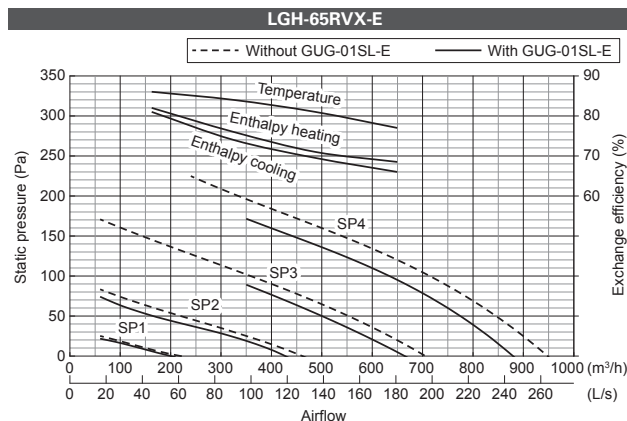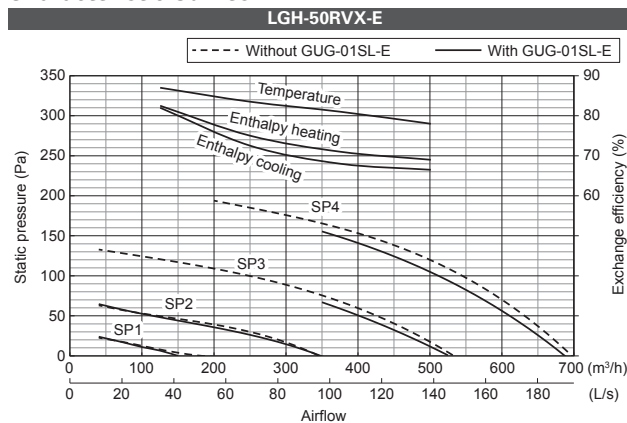

Dimensions

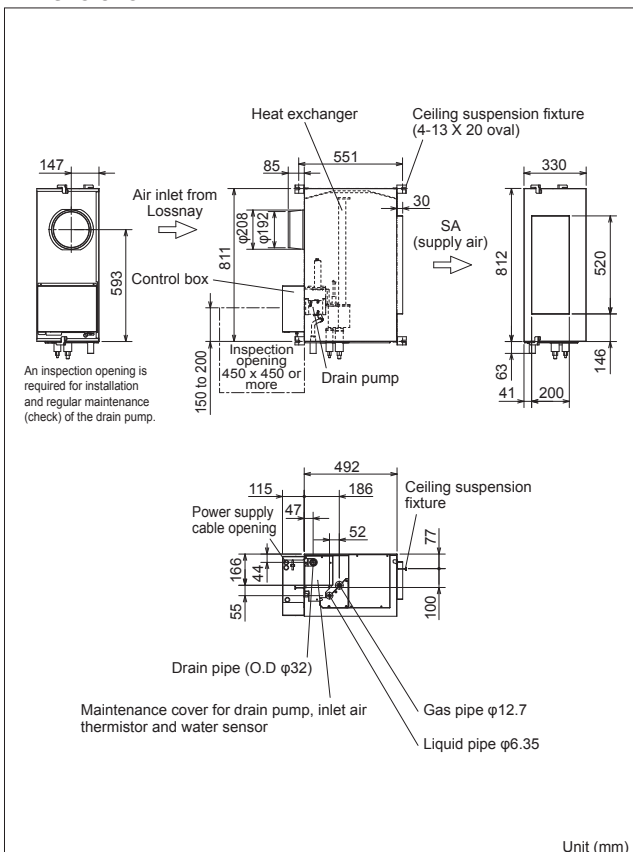

Unit (mm)

GUG-02SL-E (Connection to LGH-80RVX-E or LGH-100RVX-E)




GUG-02SL-E


Refrigerant	R410A								
Electrical power supply	220-240V / 50Hz, 220V / 60Hz (Supplied from outdoor unit)								
Input power	Heating / Fan: 2.5W, Cooling: 12.4W								
Running current	Less than 0.1A								
Weight	26kg *Accessories: Approx. 1kg								
Function	Heating / Cooling / Auto / Fan *Auto is only available for RA temperature control								
	RA (Return Air) temperature control / SA (Supply Air) temperature control [Must be set at initial setting and not possible to change from remote controller]								
RA (Return Air) temperature control									
Connectable Lossnay unit		LGH-80RVX-E				LGH-100RVX-E			
Capacity [kW]	Heating	10.0 (4.0 + 6.0)				13.2 (5.1 + 8.1)			
	Cooling	8.3 (3.3 + 5.0)				11.3 (4.2 + 7.1)			
SHF		0.69				0.66			
Performance index	Heating	4.62				4.42			
	Cooling	4.76				4.98			
Airflow range at SP3 and SP4		560 - 1200 m³/h				700 - 1200 m³/h			
Connectable outdoor unit		PUHZ-ZRP50				PUHZ-ZRP71			
Ext. piping	Diameter		Liquid / Gas: 6.35 / 12.7		Diameter		Liquid / Gas: 9.52 / 15.88		
	Maximum length: 50m, Maximum height: 30m				Maximum length: 50m, Maximum height: 30m				
Required optional parts		PAC-SH30RJ-E and PAC-SH50RJ-E				-			
SA (Supply Air) temperature control									
Connectable Lossnay unit		LGH-80RVX-E				LGH-100RVX-E			
Capacity [kW]	Heating	10.0 (4.0 + 6.0)				11.4 (5.1 + 6.3)			
	Cooling	8.3 (3.3 + 5.0)				9.5 (4.2 + 5.3)			
SHF		0.69				0.73			
Performance index	Heating	4.62				5.09			
	Cooling	4.76				5.43			
Airflow range at SP3 and SP4		560 - 1200 m³/h				700 - 1200 m³/h			
Connectable outdoor unit		PUHZ-ZRP50				PUHZ-ZRP50			
Ext. piping	Diameter		Liquid / Gas: 6.35 / 12.7		Diameter		Liquid / Gas: 6.35 / 12.7		
	Maximum length: 50m, Maximum height: 30m				Maximum length: 50m, Maximum height: 30m				
Required optional parts		PAC-SH30RJ-E and PAC-SH50RJ-E				PAC-SH30RJ-E and PAC-SH50RJ-E			
Ventilation specifications									
Connectable Lossnay unit		LGH-80RVX-E				LGH-100RVX-E			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Airflow	[m³/h]	800	600	400	200	1,000	750	500	250
	[L/s]	222	167	111	56	278	208	139	69
External static pressure [Pa]		130	73	33	8	130	73	33	8

Characteristic Curves


LGH-80RVX-E

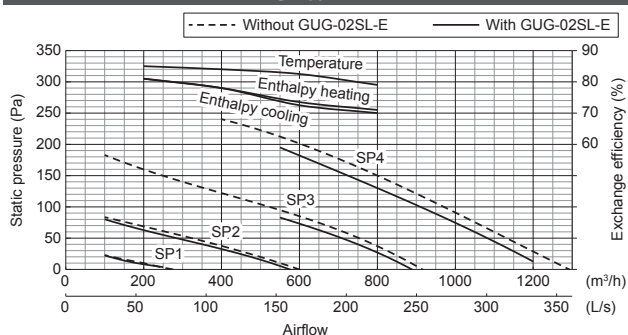

LGH-100RVX-E

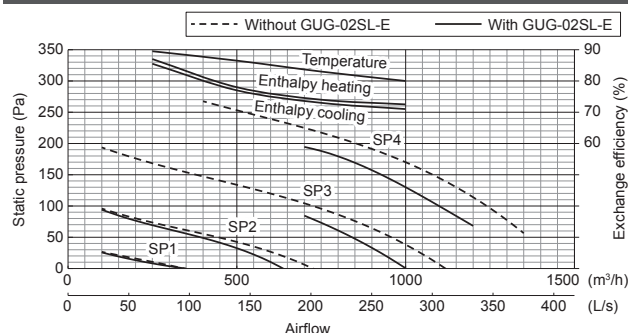

Dimensions

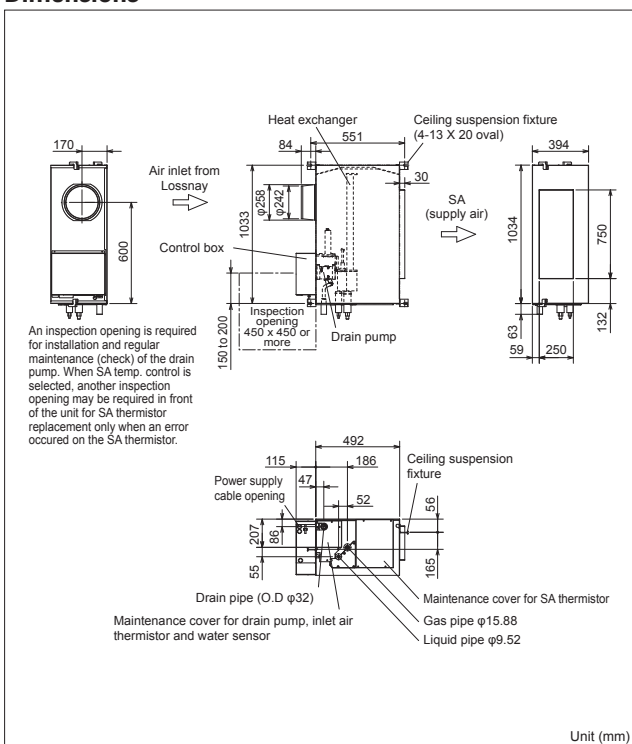

Specifications



GUG-03SL-E (Connection to LGH-150RVX-E or LGH-200RVX-E)




GUG-03SL-E

Refrigerant	R410A								
Electrical power supply	220-240V / 50Hz, 220V / 60Hz (Supplied from outdoor unit)								
Input power	Heating / Fan: 2.5W, Cooling: 12.4W								
Running current	Less than 0.1A								
Weight	28kg *Accessories: Approx. 1kg								
Function	Heating / Cooling / Auto / Fan *Auto is only available for RA temperature control								
	RA (Return Air) temperature control / SA (Supply Air) temperature control [Must be set at initial setting and not possible to change from remote controller]								
RA (Return Air) temperature control									
Connectable Lossnay unit	LGH-150RVX-E				LGH-200RVX-E				
Capacity [kW]	Heating	20.7 (7.7 + 13.0)			23.8 (10.3 + 13.5)				
	Cooling	15.8 (6.3 + 9.5)			18.4 (8.4 + 10.0)				
SHF		0.68			0.76				
Performance index	Heating	4.24			5.02				
	Cooling	5.27			5.86				
Airflow range at SP3 and SP4	1050 - 2250 m³/h				1050 - 2600 m³/h				
Connectable outdoor unit	PUHZ-ZRP100				PUHZ-ZRP100				
Ext. piping	Diameter	Liquid / Gas: 9.52 / 15.88			Diameter	Liquid / Gas: 9.52 / 15.88			
	Maximum length: 75m, Maximum height: 30m				Maximum length: 75m, Maximum height: 30m				
SA (Supply Air) temperature control									
Connectable Lossnay unit	LGH-150RVX-E				LGH-200RVX-E				
Capacity [kW]	Heating	16.6 (7.7 + 8.9)			19.5 (10.3 + 9.2)				
	Cooling	13.4 (6.3 + 7.1)			15.9 (8.5 + 7.4)				
SHF		0.85			0.90				
Performance index	Heating	5.46			6.30				
	Cooling	5.32			5.85				
Airflow range at SP3 and SP4	1050 - 2250 m³/h				1050 - 2600 m³/h				
Connectable outdoor unit	PUHZ-ZRP71				PUHZ-ZRP71				
Ext. piping	Diameter	Liquid / Gas: 9.52 / 15.88			Diameter	Liquid / Gas: 9.52 / 15.88			
	Maximum length: 50m, Maximum height: 30m				Maximum length: 50m, Maximum height: 30m				
Ventilation specifications									
Connectable Lossnay unit	LGH-150RVX-E								
Fan speed	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	
Airflow	[m³/h]	1,500	1,125	750	375	2,000	1,500	1,000	500
	[L/s]	417	313	208	104	556	417	278	139
External static pressure [Pa]	150	84	38	9	105	59	26	7	

Characteristic Curves

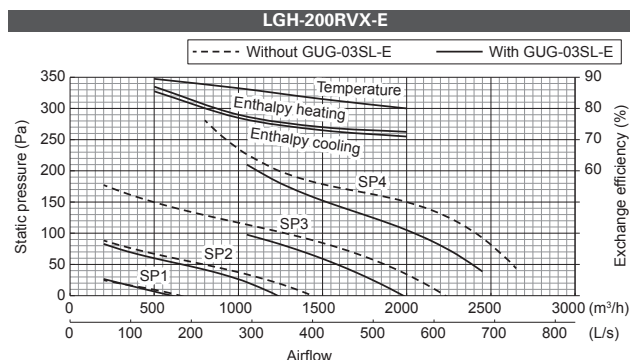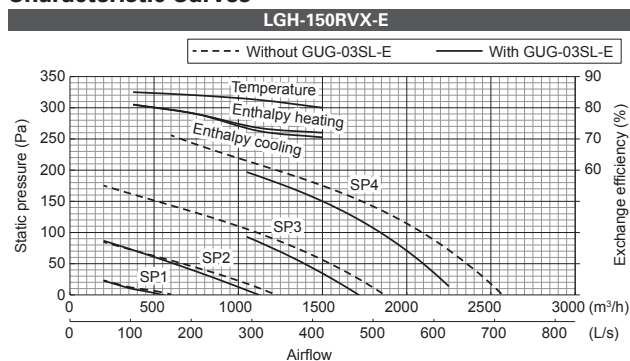


Dimensions

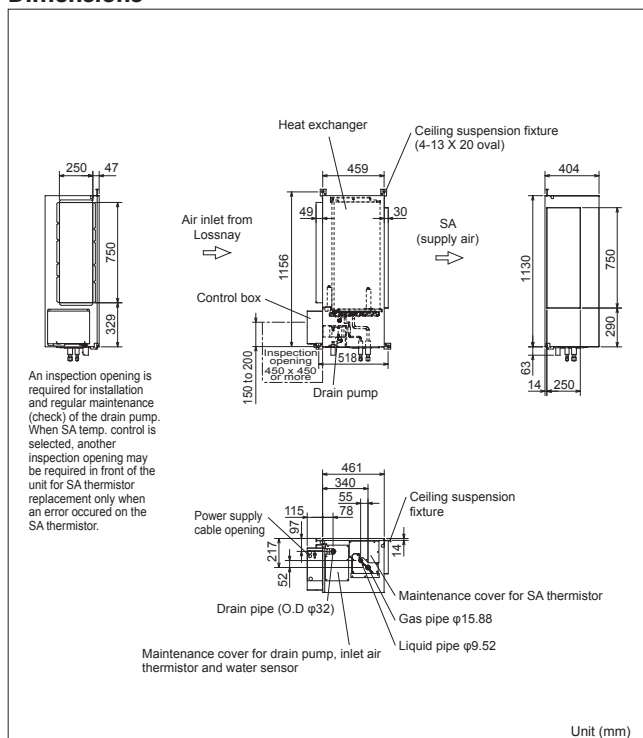

GUG-03SL-E (Connection to LGH-150RVXT-E, LGH-200RVXT-E or LGH-250RVXT-E)

Refrigerant	R410A												
Electrical power supply	220-240V / 50Hz, 220V / 60Hz (Supplied from outdoor unit)												
Input power	Heating / Fan: 2.5W, Cooling: 12.4W												
Running current	Less than 0.1A												
Weight	28kg *Accessories: Approx. 1kg												
Function	Heating / Cooling / Auto / Fan *Auto is only available for RA temperature control												
	RA (Return Air) temperature control / SA (Supply Air) temperature control [Must be set at initial setting and not possible to change from remote controller]												
RA (Return Air) temperature control													
Connectable Lossnay unit		LGH-150RVXT-E				LGH-200RVXT-E				LGH-250RVXT-E			
Capacity [kW]	Heating	20.4 (7.4 + 13.0)				23.8 (10.3 + 13.5)				26.1 (12.1 + 14.0)			
	Cooling	15.7 (6.2 + 9.5)				18.4 (8.4 + 10.0)				22.3 (9.8 + 12.5)			
SHF		0.68				0.76				0.87			
Performance index	Heating	4.07				4.86				4.75			
	Cooling	5.03				5.59				4.59			
Airflow range at SP3 and SP4		1050 - 2250 m³/h				1050 - 2600 m³/h				1750 - 2880 m³/h			
Connectable outdoor unit		PUHZ-ZRP100				PUHZ-ZRP100				PUHZ-ZRP125			
Ext. piping	Diameter	Liquid / Gas: 9.52 / 15.88				Liquid / Gas: 9.52 / 15.88				Liquid / Gas: 9.52 / 15.88			
	Maximum length: 75m, Maximum height: 30m				Maximum length: 75m, Maximum height: 30m				Maximum length: 75m, Maximum height: 30m				
SA (Supply Air) temperature control													
Connectable Lossnay unit		LGH-150RVXT-E				LGH-200RVXT-E				LGH-250RVXT-E			
Capacity [kW]	Heating	16.3 (7.4 + 8.9)				19.5 (10.3 + 9.2)				21.6 (12.1 + 9.5)			
	Cooling	13.3 (6.2 + 7.1)				15.9 (8.5 + 7.4)				17.6 (9.8 + 7.8)			
SHF		0.86				0.90				0.95			
Performance index	Heating	5.16				6.01				5.97			
	Cooling	5.03				5.54				5.31			
Airflow range at SP3 and SP4		1050 - 2250 m³/h				1050 - 2600 m³/h				1000 - 2600 m³/h			
Connectable outdoor unit		PUHZ-ZRP71				PUHZ-ZRP71				PUHZ-ZRP71			
Ext. piping	Diameter	Liquid / Gas: 9.52 / 15.88				Liquid / Gas: 9.52 / 15.88				Liquid / Gas: 9.52 / 15.88			
	Maximum length: 50m, Maximum height: 30m				Maximum length: 50m, Maximum height: 30m				Maximum length: 50m, Maximum height: 30m				
Ventilation specifications													
Connectable Lossnay unit		LGH-150RVXT-E				LGH-200RVXT-E				LGH-250RVXT-E			
Fan speed		SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1	SP4	SP3	SP2	SP1
Airflow	[m³/h]	1,500	1,125	750	375	2,000	1,500	1,000	500	2,500	1,875	1,250	625
	[L/s]	417	313	208	104	556	417	278	139	694	521	347	174
External static pressure [Pa]		150	84	38	9	145	82	36	9	140	79	35	9

Characteristic Curves **Note** The graphs below show the supply air only.

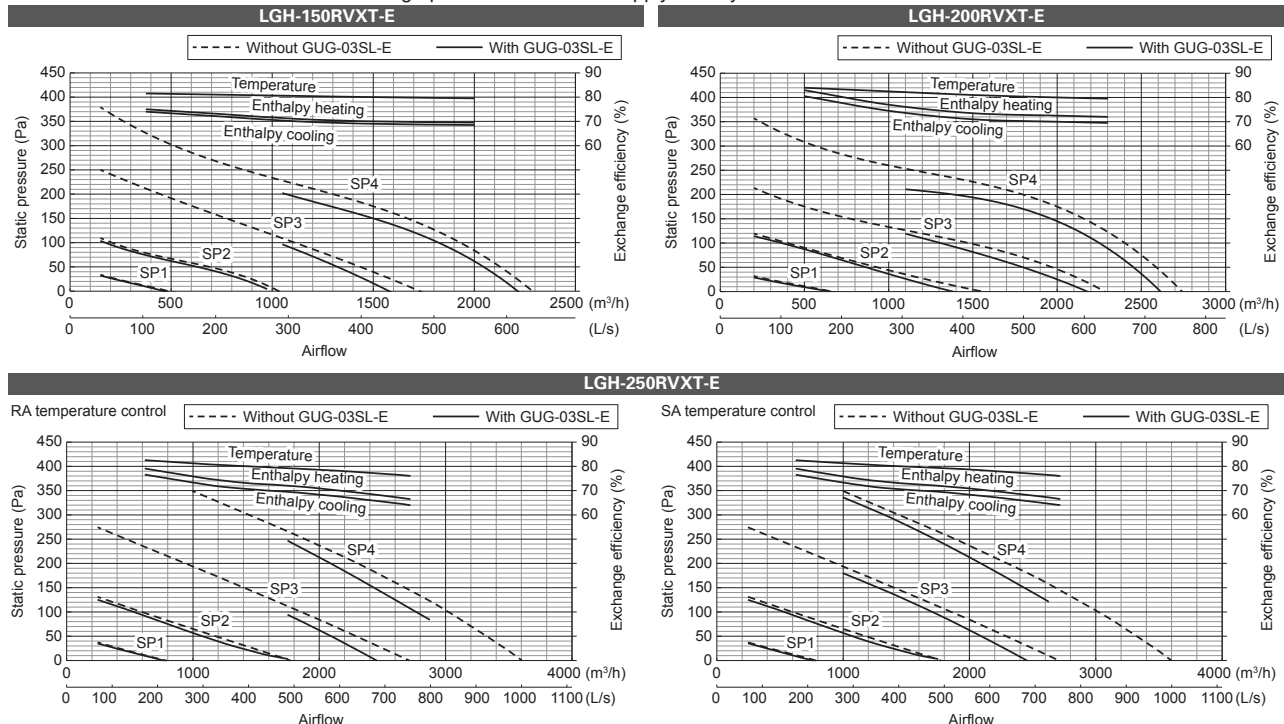

Attention


- The running current and input power are based on 230V/50Hz.
- The cooling and heating capacities are based on the air conditions listed below and the rated airflow of fan speed 4.
Cooling Indoor: 27°CDB/19°CWB, Outdoor: 35°CDB/24°CWB
Heating Indoor: 20°CDB/15°CWB, Outdoor: 7°CDB/6°CWB
- The first figure in () of the capacity specification is the heat recovery energy of the Lossnay unit. The second figure is the capacity specification for the Dx-coil connected to the outdoor unit.
- "Performance index" is the calculated value at the temperature conditions above, and is for reference purpose only.
Performance index = Total capacity ÷ total power consumption of outdoor unit and Lossnay unit
- The external static pressure listed in the tables includes the static pressure loss of the Dx-coil unit when using a 50cm straight duct between the Lossnay and Dx-coil units. When the duct work between the Lossnay and Dx-coil units is longer and/or bent, the pressure loss of the duct work should be included in the pressure loss calculation.
- The designed airflow of the system (Lossnay, Dx-coil and duct work) at fan speed 3 and 4 should be kept within "Airflow range at SP3 and SP4" listed in the tables. This range is shown as the solid line in graphs of the characteristic curves. If the Lossnay airflow is out of this range, the compressor of the outdoor unit may stop for self-protection purposes.
- By installing the Dx-coil unit with a Lossnay unit, the air blow noise level is quieter at fan speed 4. Please refer to the "Direct Expansion coil unit for Lossnay" catalog.
- Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit or disassemble the product yourself and always ask a professional.

Residential Use Lossnay

Mitsubishi Electric offers decentralized and centralized ventilation solutions for optimizing your indoor air quality by Lossnay.


Decentralized Ventilation Solution

Install a wall-mounted Lossnay in each room.
The heat recovery system provides fresh air at a comfortable air temperature.
Total heat exchangers effectively reduce heat loss.

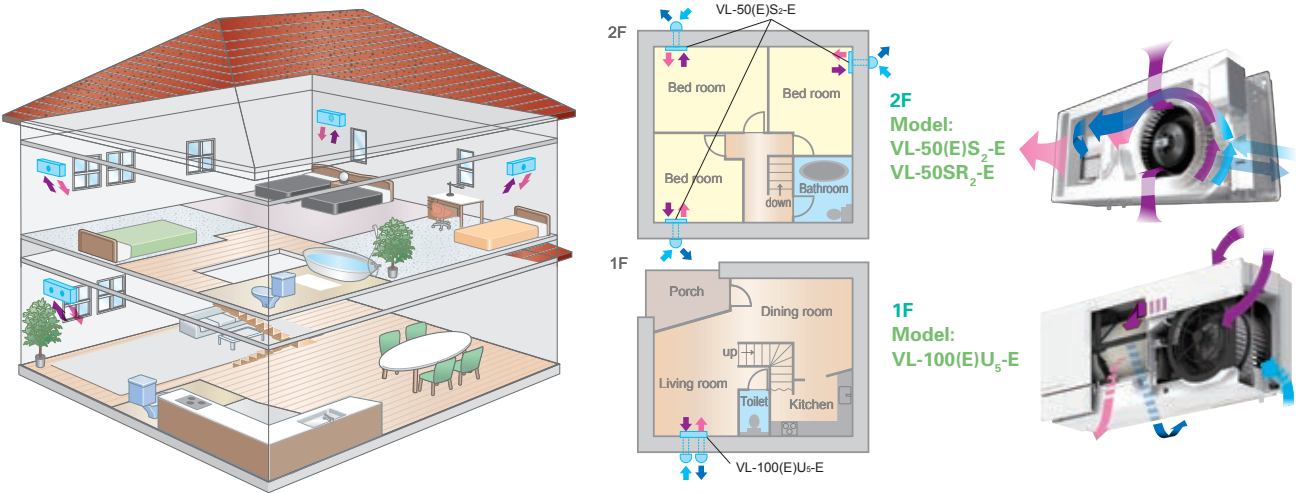

Centralized Ventilation Solution

One Lossnay unit provides 24-hour ventilation for the entire house, from living room and bedrooms to the bathroom. The heat recovery system provides fresh air at a comfortable air temperature. A sensible heat exchanger effectively reduces excess humidity in the winter.

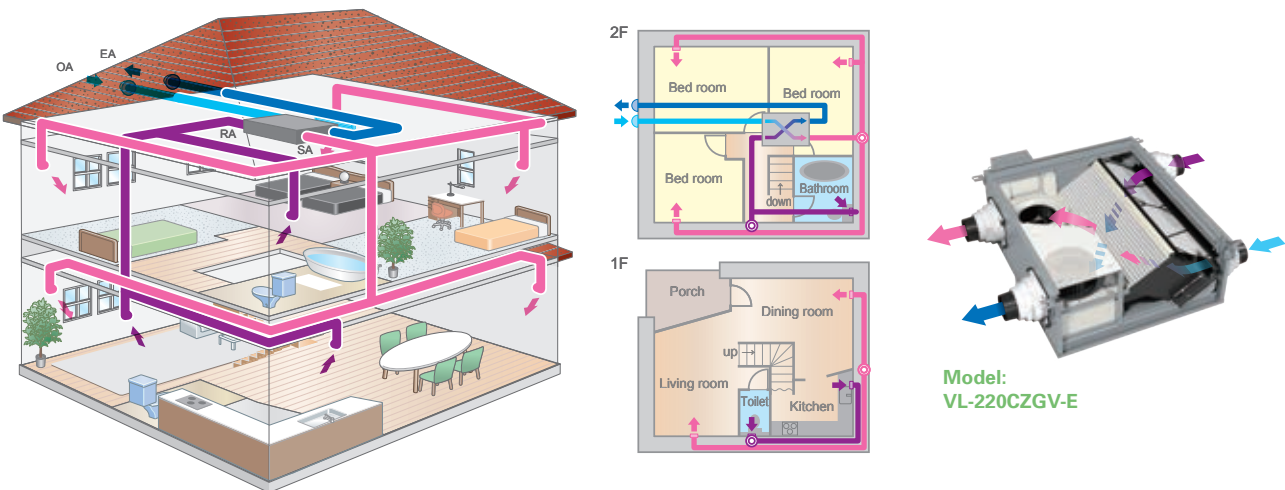


Decentralized ventilation: VL-50(E)S2-E, VL-50SR2-E and VL-100(E)U5-E


Product Advantages

Simultaneous Air Supply and Exhaust

Air is supplied and exhausted simultaneously while transferring the heat.



The low noise level is good for bedrooms and children's rooms.

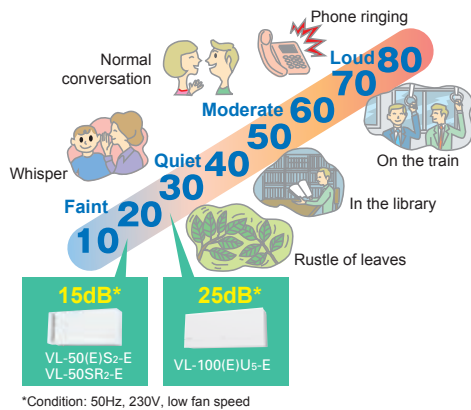

Energy Efficient


- Total heat exchanger minimizes heat loss.
- A temperature efficiency of over 80%* is achieved.

*VL-100(E)U5-E at low fan speed at 230V 50Hz

*VL-50(E)S2-E and VL-50SR2-E at low fan speed at 230V 50Hz

Sound Insulation

A sound insulation effect reduces noise generated outside.

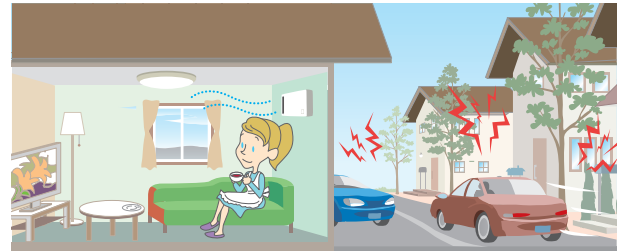

Sound Insulation Effect	Average sound pressure on ~ side (dB)	Average sound pressure on ~ side (dB)	Difference
	103.4	63.2	40.2

*Tested using VL-08S2-AE

*Measured at an average sound pressure level of more than 30dB at 500Hz according to JIS A1416.

VL-08S2-AE is a dedicated Japanese model equivalent to VL-50(E)S2-E

Product Features

Stylish Design

Matches any interior decor to create a comfortable room.




VL-50(E)S2-E
VL-50SR2-E



VL-100(E)U5-E


Easy Maintenance

The only maintenance that is required is cleaning the outside and exhaust air filters. The filters are easily accessible for quick and thorough cleaning.

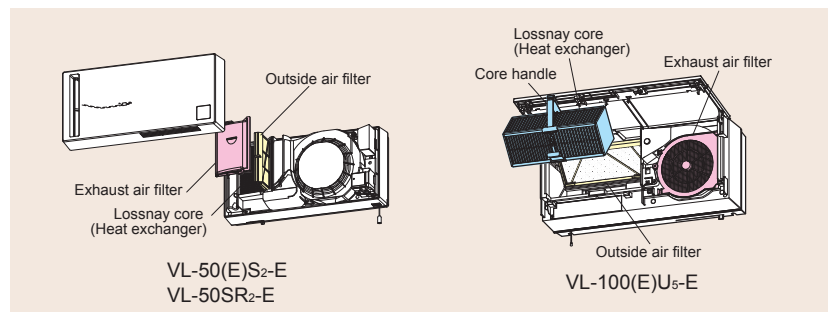

Flexible Installation (For VL-50(E)S2-E and VL-50SR2-E)

The VL-50(E)S2-E and VL-50SR2-E can be installed not only horizontally but also vertically. Their flexible installation makes them a perfect fit in various types of rooms.

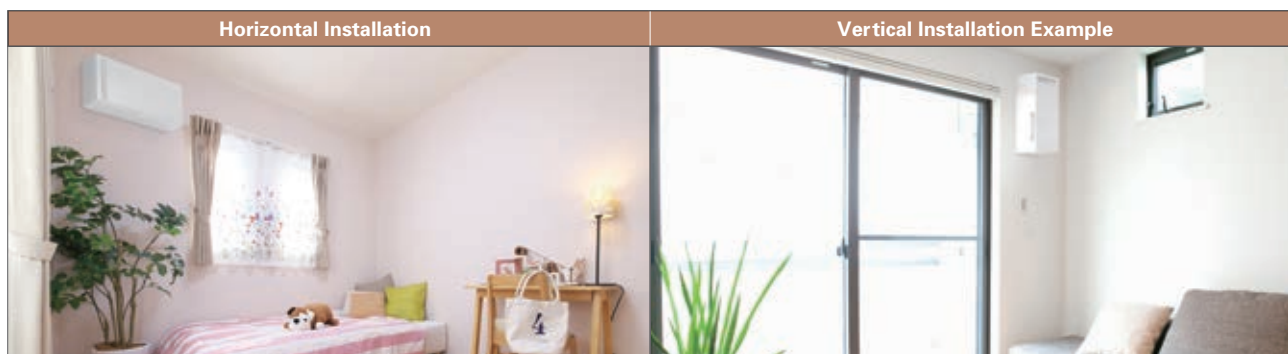

Centralized ventilation: VL-220CZGV-E


Product Advantages

Newly Developed Heat Exchanger

- During ventilation, Lossnay recovers warmth in the winter and keeps air cool in the summer.
- Reduces heating and cooling loads with a maximum exchange efficiency of 86%*.


Normal Square Heat Exchanger

Simple structure contributes to minimising pressure loss and reducing power consumption.



Diamond Heat Exchanger

The diamond design allows for longer air passages and helps realise higher exchange efficiency.



*Fan speed 1

Energy Efficient

- The highest energy-saving performance in its class. (8.5W* minimum input power)
- Saves heating and cooling costs by minimising energy loss that occurs during ventilation.



Quiet

- At an ultra quiet 14dB*, it is the quietest product in its class.
- Blocks outside noise for a more comfortable environment.




Product Features

Precise Fan Speed Adjustment Function

Each main fan speed value can be further adjusted slightly. Use the PZ-61DR-E remote controller to adjust the speed.

- 1) Considering the total hours of Lossnay operation (filter clogging), fan power can be adjusted automatically after a given period of time.
- 2) After the unit is installed, fine adjustments can be made if the airflow is slightly lower or higher than the desired airflow. (Fan speed 4 can only be adjusted 1 or 2 steps down.)

P-Q curve image

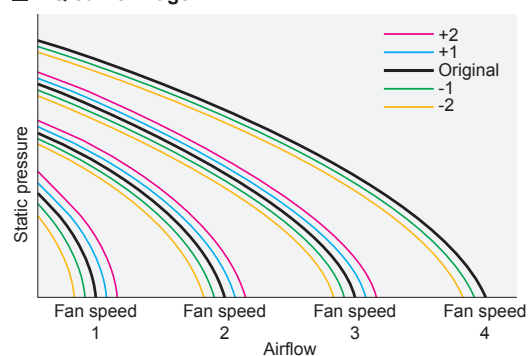


Multi Ventilation (Power Supply and Exhaust) Mode

This mode allows the air supply/exhaust balance to be varied dynamically. The supply/exhaust balance can be selected to suit the usage environment.

Normal Mode	Power Supply Mode		Power Exhaust Mode	
Relax time 	Adjust the indoor pressure balance in case a separate exhaust is installed 	Increase indoor pressure to prevent unfiltered drafts from coming in 	Keep steam inside of the shower room 	Prevent odors from spreading

Weekly Timer

Operation patterns for each day of the week. ON/OFF and airflow can be set using the weekly timer function (up to eight zones per day). This function contributes to enhanced energy-saving operation.

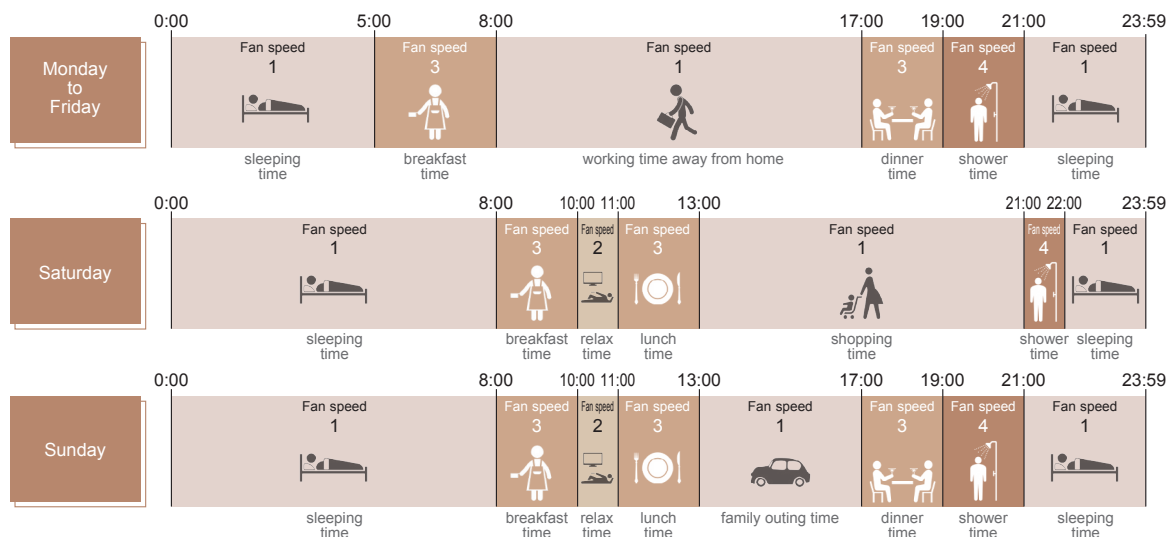

*Example for reference only.


Residential Lossnay Specifications

Model: VL-50S₂-E (Pull-Switch Model) and VL-50ES₂-E (Wall-Switch Model)

Model	VL-50(E)/S ₂ -E							
Electrical power supply	220V/50Hz		230V/50Hz		240V/50Hz		220V/60Hz	
Fan speed	High	Low	High	Low	High	Low	High	Low
Airflow (m ³ /h)	51	15	52.5	16	54	17	54	17
Power consumption (W)	19	4	20	4.5	21	5	21	5.5
Temperature exchange efficiency (%)	70	86	69	85	68	84	68	84
Noise level (dB)	36.5	14	37	15	37.5	15.5	37.5	15.5
Weight (kg)	6.2							
Specific energy consumption class	C							

*Figures in the chart were measured according to Japan Industrial Standard (JIS B 8628) with the shutter knob in open position.

Dimensions

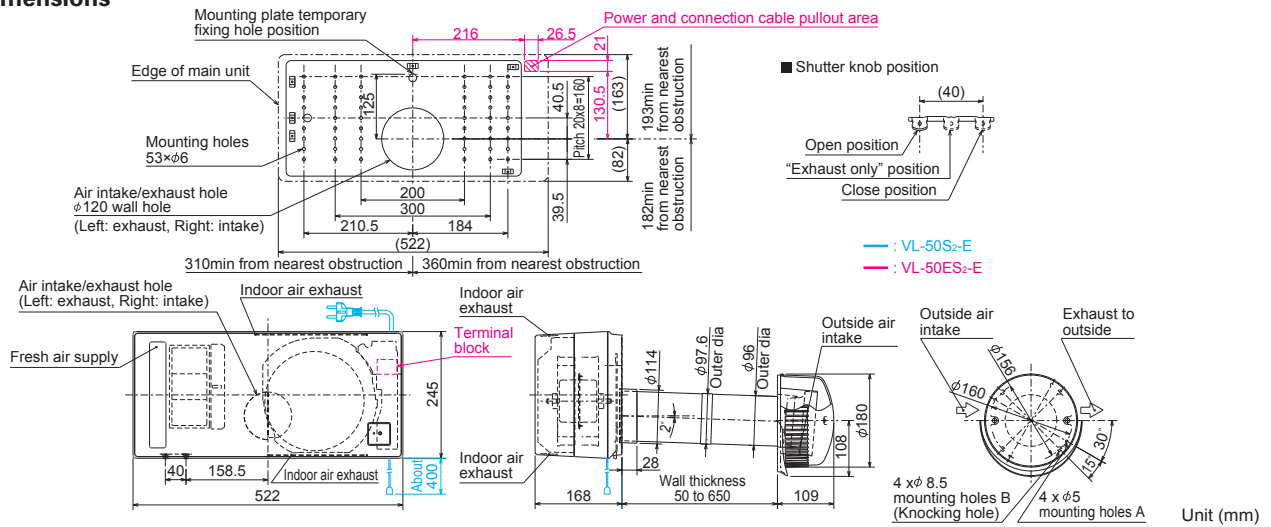


Model: VL-50SR₂-E (Remote Controller Model)

Model	VL-50SR ₂ -E							
Electrical power supply	220V/50Hz		230V/50Hz		240V/50Hz		220V/60Hz	
Fan speed	High	Low	High	Low	High	Low	High	Low
Airflow (m ³ /h)	51	15	52.5	16	54	17	54	17
Power consumption (W)	19	4.5	20	5	21	5.5	21	6
Temperature exchange efficiency (%)	70	86	69	85	68	84	68	84
Noise level (dB)	36.5	14	37	15	37.5	15.5	37.5	15.5
Weight (kg)	6.2							
Specific energy consumption class	C							

*Figures in the chart were measured according to Japan Industrial Standard (JIS B 8628) with the shutter knob in open position.

Dimensions

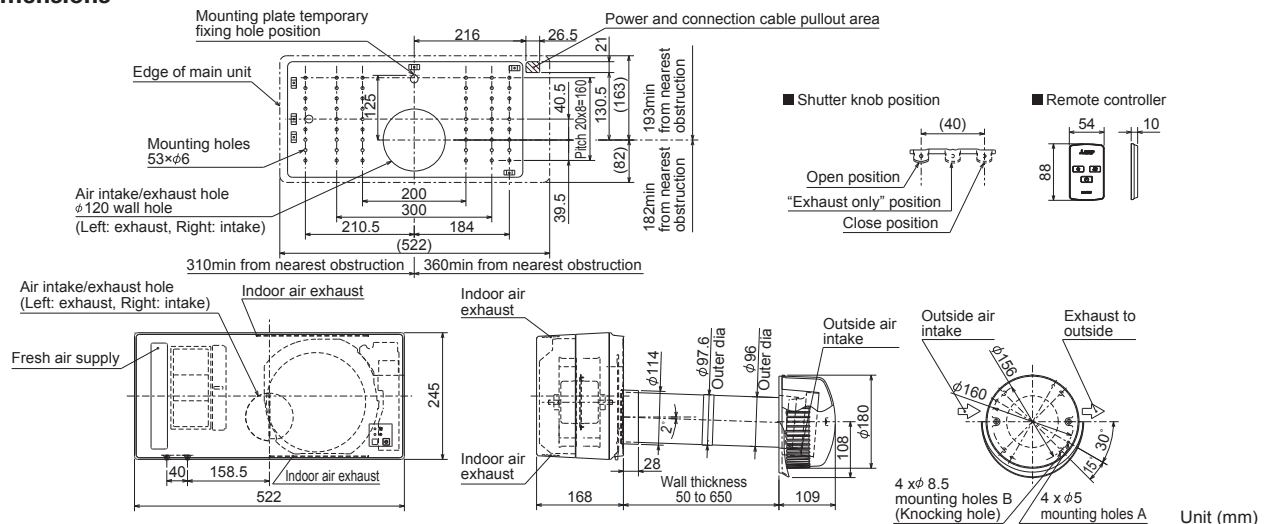


Model: VL-100U5-E (Pull-Switch Model) and VL-100EU5-E (Wall-Switch Model)

Model	VL-100(E)U5-E							
Electrical power supply	220V/50Hz		230V/50Hz		240V/50Hz		220V/60Hz	
Fan speed	High	Low	High	Low	High	Low	High	Low
Airflow (m³/h)	100	55	105	60	106	61	103	57
Power consumption (W)	30	13	31	15	34	17	34	17
Temperature exchange efficiency (%)	73	80	73	80	72	79	73	80
Noise level (dB)	36.5	24	37	25	38	27	38	25
Weight (kg)	7.5							
Specific energy consumption class	B							

*Figures in the chart were measured according to Japan Industrial Standard (JIS B 8628) with the shutter knob in open position.

Dimensions

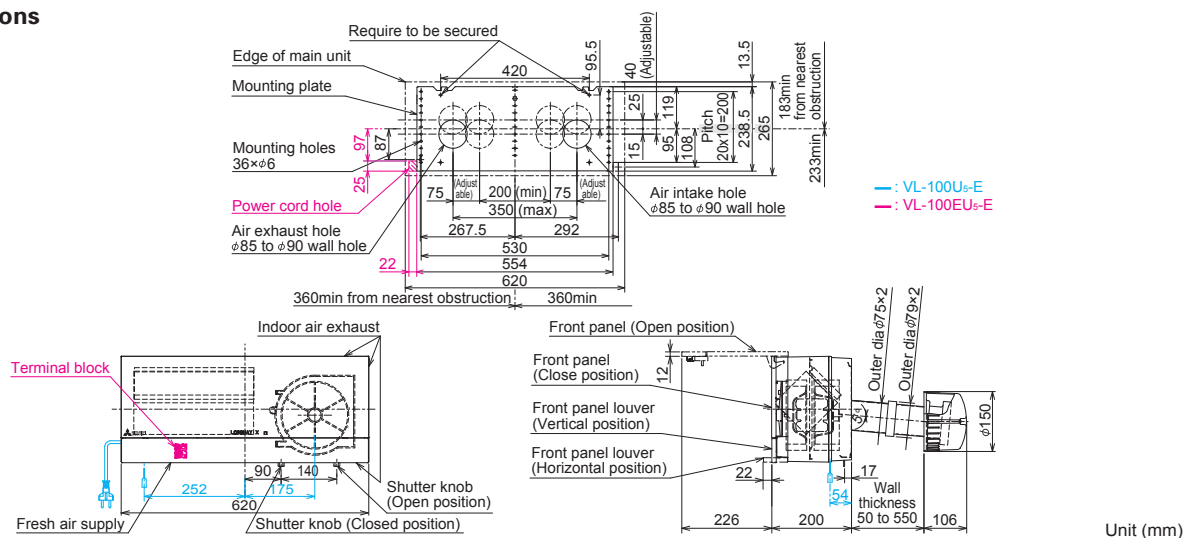


Model: VL-220CZGV-E


Model	VL-220CZGV-E			
Electrical power supply	220-240V/50Hz 220V/60Hz			
Ventilation mode	Heat recovery mode			
Fan speed	Fan speed 4	Fan speed 3	Fan speed 2	Fan speed 1
Running current	0.60	0.29	0.18	0.11
Input power (W)	80	35	18.5	8.5
Airflow	(m³/h)	230	165	120
	(L/s)	64	46	33
External static pressure (Pa)	164	84	44	13
Temperature exchange efficiency (%)	82	84	85	86
Noise level (dB)	31	25	19	14
Weight (kg)	31			
Specific energy consumption class	A			

*Figures in the chart were measured according to Japan Industrial Standard (JIS B 8628). Characteristic curves were measured by chamber method.

Characteristic Curve

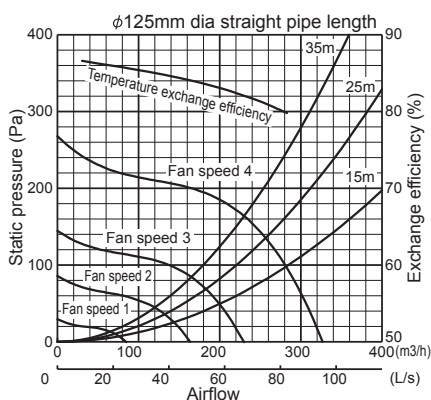



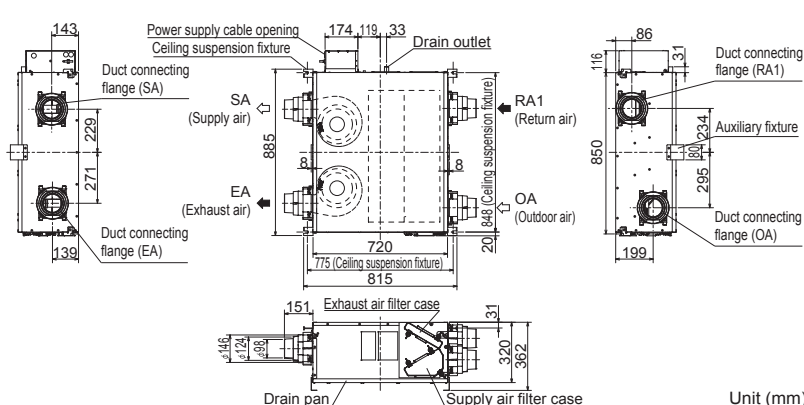


Dimensions



Accessories





Parts for VL-50(E)S2-E and VL-50SR2-E

Filters, Extension Pipe and Stainless Hood

Type	Replacement Filter	High Efficiency Filter	Extension Pipe	Joint	Stainless Hood
Design		 Optional	 Optional	 Optional	 Optional
Model	P-50F2-E	P-50HF2-E	P-50P-E	P-50PJ-E	P-50VSQ5-E
Feature	–	–	Total length when connected to the joint is 350mm.	Joint for extension pipe	Stylish stainless hood
Classification (EN779:2012)	G3	–	–	–	–
Classification (ISO16890)	Coarse 35%	ePM10 75%	–	–	–

Parts for VL-100(E)U5-E


Filters and Extension Pipe

Type	Replacement Filter	High Efficiency Filter	Extension Pipe	Joint
Design		 Optional	 Optional	 Optional
Model	P-100F5-E	P-100HF5-E	P-100P-E	P-100PJ-E
Feature	–	–	Total length when connected to the joint is 300mm.	<ul style="list-style-type: none"> • Joint for extension pipe • Screw-in method
Classification (EN779:2012)	G3	M6	–	–
Classification (ISO16890)	Coarse 35%	ePM10 70%	–	–

Parts for VL-220CZGV-E




Bypass Damper

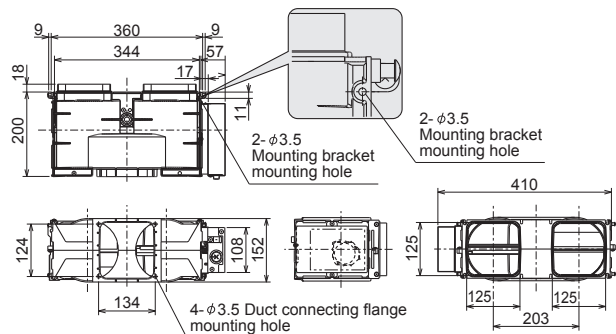Model: P-133DUE-E



Unit (mm)

Filters

Type	Standard Replacement Filter	Medium Efficiency Exhaust Air Filter	High Efficiency Supply Air Filter
Design		 Optional	 Optional
Model	P-220F-E	P-220EMF-E	P-220SHF-E
Classification (EN779:2012)	G3	G4	M6
Classification (ISO16890)	Coarse 35%	ePM10 50%	ePM10 70%



NOTICE

- Do not install indoor units in areas (e.g. mobile phone base stations) where the emission of VOCs such as phthalate compounds and formaldehyde is known to be high as this may result in a chemical reaction.
- Our air-conditioning equipments and heat pumps contain a fluorinated greenhouse gas, R410A (GWP: 2088) or R32 (GWP: 675). *These GWP values are based on Regulation (EU) No.517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP: 1975), R32 (GWP: 550)
- When installing or relocating or servicing our air-conditioning equipment, use only the specified refrigerant (R410A or R32) to charge the refrigerant lines.
Do not mix it with any other refrigerant and do not allow air to remain in the lines.
If air is mixed with the refrigerant, then it can be the cause of abnormal high pressure in the refrigerant lines, and may result in an explosion and other hazards.
The use of any refrigerant other than that specified for the system will cause mechanical failure, system malfunction or unit breakdown. In the worst case, this could lead to a serious impediment to securing product safety.



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BUILDING, 2-7-3 MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
<http://Global.MitsubishiElectric.com/>

