


SEZ-M SERIES



Indoor Unit

R32
R410A

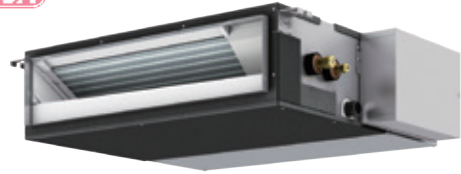

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

R32 For Single For Multi (Twin/Triple/Quadruple)



Remote Controller




Indoor Unit Combination	Outdoor Unit Capacity															
	For Single			For Twin			For Triple			For Quadruple						
Power Inverter (PUZ-ZM)	35x1	50x1	60x1	71x1	100	125	140	71	100	125	100	125	140	125	140	
Distribution Pipe	-	-	-	-	-	-	-	MSDD-50TR2-E			MSDT-111R3-E			MSDF-1111R2-E		

SEZ-M SERIES



Indoor Unit

R32
R410A

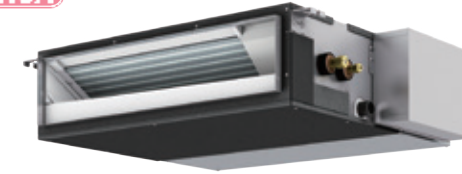

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

R32 For Single R32 R32



Remote Controller



Indoor Unit Combination	Outdoor Unit Capacity				
	For Single				
S Seires	25	35	50	60	71
Distribution Pipe	-	-	-	-	-

Type	Inverter Heat Pump			
Indoor Unit	SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2
Outdoor Unit	PUZ-ZM35VKA2	PUZ-ZM50VKA2	PUZ-ZM60VHA2	PUZ-ZM71VHA2
Refrigerant ⁽¹⁾	R32			
Power Supply	Outdoor power supply 230/Single/50			
Cooling	Capacity	Rated	kW	3.6
	Min-Max	Rated	kW	1.6 - 3.9
	Total Input	Rated	kW	0.857
	EER ⁽⁴⁾	Rated		4.20
	Design load		kW	3.6
	Annual electricity consumption ⁽²⁾		kWh/a	205
	SEER ⁽⁴⁾⁽⁵⁾			6.1
Heating	Energy efficiency class			A++
	Capacity	Rated	kW	4.1
	Min-Max	Rated	kW	1.6 - 5.0
	Total Input	Rated	kW	1.025
	COP ⁽⁴⁾	Rated		4.00
	Design load		kW	2.4
	Declared Capacity	at reference design temperature	kW	2.4 (-10°C)
		at bivalent temperature	kW	2.4 (-10°C)
		at operation limit temperature	kW	2.2 (-11°C)
	Back up heating capacity		kW	0.0
Annual electricity consumption ⁽²⁾		kWh/a	791	
SEER ⁽⁴⁾⁽⁵⁾			4.2	
Operating Current(Max)	Energy efficiency class			A+
	Input (cooling / Heating)	Rated	kW	0.047
	Operating Current(Max)		A	0.65
	Dimensions	H*W*D	mm	200-990-700
	Weight		kg	22
	Air Volume (Lo-Mid-Hi)		m³/min	7-9-11
	External Static Pressure ⁽⁶⁾	Rated	Pa	<5> - <25> - <35> - <50>
	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23-27-31
	Sound Level (Lo-Mid-Hi) (SPL)	5Pa ⁽⁷⁾	dB(A)	22-26-30
	Sound Level (PWL)		dB(A)	51
Outdoor Unit	Dimensions	H*W*D	mm	630-809-300
	Weight		kg	46
	Air Volume	Cooling	m³/min	45
		Heating	m³/min	45
	Sound Level (SPL)	Cooling	dB(A)	44
		Heating	dB(A)	46
	Sound Level (PWL)	Cooling	dB(A)	65
	Operating Current(Max)		A	13
	Breaker Size		A	16
	Ext.Piping	Diameter ⁽⁸⁾	Liquid/Gas	mm
Max.Length		Out-In	m	50
		Out-In	m	30
Max.Height		Out-In	m	30
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C	-15 ~ +46	
	Heating	°C	-11 ~ +21	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than -5°C.
*4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 25Pa.
*5 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*6 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.
*7 The factory setting of ESP is shown without < > .
*8 SPL measured at ESP 5Pa.

Type	Inverter Heat Pump			
Indoor Unit	SEZ-M25DA(L)2	SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2
Outdoor Unit	SUZ-M25VA	SUZ-M35VA	SUZ-M50VA	SUZ-M60VA
Refrigerant ⁽¹⁾	R32			
Power Supply	Outdoor power supply 230/Single/50			
Cooling	Capacity	Rated	kW	2.5
	Min-Max	Rated	kW	1.4 - 3.2
	Total Input	Rated	kW	0.714
	EER ⁽⁴⁾	Rated		3.50
	Design load		kW	2.5
	Annual electricity consumption ⁽²⁾		kWh/a	146
	SEER ⁽⁴⁾⁽⁵⁾			6.0
Heating	Energy efficiency class			A+
	Capacity	Rated	kW	2.9
	Min-Max	Rated	kW	1.3 - 4.2
	Total Input	Rated	kW	0.803
	COP ⁽⁴⁾	Rated		3.61
	Design load		kW	2.2
	Declared Capacity	at reference design temperature	kW	2.0 (-10°C)
		at bivalent temperature	kW	2.0 (-7°C)
		at operation limit temperature	kW	2.0 (-10°C)
	Back up heating capacity		kW	0.2
Annual electricity consumption ⁽²⁾		kWh/a	769	
SEER ⁽⁴⁾⁽⁵⁾			4.0	
Operating Current(Max)	Energy efficiency class			A+
	Input (cooling / Heating)	Rated	kW	0.043
	Operating Current(Max)		A	0.62
	Dimensions	H*W*D	mm	200-790-700
	Weight		kg	18
	Air Volume (Lo-Mid-Hi)		m³/min	5.5-7-9
	External Static Pressure ⁽⁶⁾	Rated	Pa	<5> - <25> - <35> - <50>
	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23-26-30
	Sound Level (Lo-Mid-Hi) (SPL)	5Pa ⁽⁷⁾	dB(A)	22-25-29
	Sound Level (PWL)		dB(A)	50
Outdoor Unit	Dimensions	H*W*D	mm	550-800-285
	Weight		kg	30
	Air Volume	Cooling	m³/min	36.3
		Heating	m³/min	34.6
	Sound Level (SPL)	Cooling	dB(A)	45
		Heating	dB(A)	46
	Sound Level (PWL)	Cooling	dB(A)	59
	Operating Current(Max)		A	6.8
	Breaker Size		A	10
	Ext.Piping	Diameter ⁽⁸⁾	Liquid/Gas	mm
Max.Length		Out-In	m	20
		Out-In	m	12
Max.Height		Out-In	m	12
Guaranteed Operating Range (Outdoor)	Cooling ⁽³⁾	°C	-10 ~ +46	
	Heating	°C	-10 ~ +24	


*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 SEER/SCOP are measured at ESP 25Pa.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.
*6 The factory setting of ESP is shown without < > .
*7 SPL measured at ESP 5Pa.

SEZ-M SERIES



Indoor Unit

R32
R410A

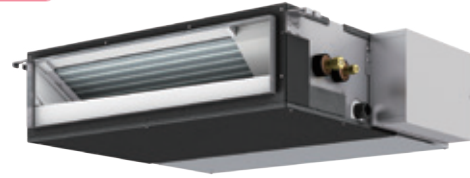

SEZ-M25/35/50/60/71DA2 (Requires Wired Remote Controller)
SEZ-M25/35/50/60/71DAL2 (Wireless Remote Controller is enclosed)

Outdoor Unit

R410A For Single



SUZ-KA25/35VA6



SUZ-KA50/60/71VA6

Remote Controller



Enclosed in SEZ-M DAL2



*optional (for SEZ-M DA2)



*optional (for SEZ-M DA2)



*optional (for SEZ-M DA2)



Indoor Unit Combination	Outdoor Unit Capacity				
	For Single				
S series	25x1	35x1	50x1	60x1	71x1
Distribution Pipe	-	-	-	-	-

Type	Inverter Heat Pump								
Indoor Unit	SEZ-M25DA(L)2	SEZ-M35DA(L)2	SEZ-M50DA(L)2	SEZ-M60DA(L)2	SEZ-M71DA(L)2				
Outdoor Unit	SUZ-KA25VA6	SUZ-KA35VA6	SUZ-KA50VA6	SUZ-KA60VA6	SUZ-KA71VA6				
Refrigerant ⁽¹⁾	R410A								
Power Supply	Outdoor power supply 230/Single/50								
Cooling	Capacity	Rated	kW	2.5	3.5	5.1	5.6	7.1	
		Min-Max	kW	1.5 - 3.2	1.4 - 3.9	2.3 - 5.6	2.3 - 6.3	2.8 - 8.3	
	Total Input	Rated	kW	0.731	1.012	1.580	1.740	2.210	
	EER ⁽⁴⁾			3.42	3.46	3.23	3.22	3.21	
	Design load		kW	2.5	3.5	5.1	5.6	7.1	
	Annual electricity consumption ⁽²⁾		kWh/a	159	203	297	353	449	
	SEER ⁽⁴⁾⁽⁵⁾			5.5	6.0	6.0	5.5	5.5	
		Energy efficiency class		A	A+	A+	A	A	
	Heating	Capacity	Rated	kW	2.9	4.2	6.4	7.4	8.1
			Min-Max	kW	1.3 - 4.5	1.7 - 5.0	1.7 - 7.2	2.5 - 8.0	2.6 - 10.4
Total Input		Rated	kW	0.803	1.132	1.800	2.200	2.268	
COP ⁽⁴⁾				3.61	3.71	3.56	3.36	3.50	
Design load			kW	2.2	2.8	4.6	5.5	6.0	
Declared Capacity		at reference design temperature	kW	1.9 (-10°C)	2.5 (-10°C)	4.1 (-10°C)	4.5 (-10°C)	5.3 (-10°C)	
		at bivalent temperature	kW	1.9 (-7°C)	2.5 (-7°C)	4.1 (-7°C)	4.8 (-7°C)	5.3 (-7°C)	
		at operation limit temperature	kW	1.9 (-10°C)	2.5 (-10°C)	4.1 (-10°C)	4.5 (-10°C)	5.3 (-10°C)	
Back up heating capacity			kW	0.3	0.3	0.5	1.0	0.7	
Annual electricity consumption ⁽²⁾			kWh/a	789	977	1614	1857	2147	
SCOP ⁽⁴⁾⁽⁵⁾			3.9	4.0	3.9	4.1	3.9		
	Energy efficiency class		A	A+	A	A+	A		
Operating Current(Max)		A	7.6	8.9	12.8	14.9	17.1		
Indoor Unit	Input (cooling / Heating)	Rated	kW	0.043	0.047	0.077	0.084	0.102	
	Operating Current(Max)		A	0.62	0.65	0.82	0.88	1.00	
	Dimensions	H*W*D	mm	200 - 790 - 700	200 - 990 - 700	200 - 990 - 700	200 - 1190 - 700	200 - 1190 - 700	
	Weight		kg	18	22	22	25.5	25.5	
	Air Volume (Lo-Mid-Hi)		m³/min	5.5 - 7 - 9	7 - 9 - 11	10 - 12.5 - 15	12 - 15 - 18	12 - 16 - 20	
	External Static Pressure ⁽⁶⁾		Pa	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	<5> - 25 - <35> - <50>	
	Sound Level (Lo-Mid-Hi) (SPL)	Rated	dB(A)	23 - 26 - 30	23 - 27 - 31	30 - 34 - 37	30 - 34 - 37	30 - 35 - 40	
		5Pa ⁽⁷⁾	dB(A)	22 - 25 - 29	22 - 26 - 30	29 - 33 - 36	29 - 33 - 37	29 - 34 - 39	
Outdoor Unit	Sound Level (PWL)		dB(A)	50	51	57	58	60	
	Dimensions	H*W*D	mm	550-800-285	550-800-285	880-840-330	880-840-330	880-840-330	
	Weight		kg	30	35	54	50	53	
	Air Volume	Cooling	m³/min	32.6	36.3	44.6	40.9	50.1	
		Heating	m³/min	34.7	34.8	44.6	49.2	48.2	
	Sound Level (SPL)	Cooling	dB(A)	47	49	52	55	55	
		Heating	dB(A)	48	50	52	55	55	
	Sound Level (PWL)	Cooling	dB(A)	58	62	65	65	69	
	Operating Current(Max)		A	7	8.0	12	14	16.1	
	Breaker Size		A	10	10	20	20	20	
Ext.Piping	Diameter ⁽⁸⁾	Liquid/Gas	mm	6.35 / 9.52	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	
	Max.Length	Out-In	m	20	20	30	30	30	
	Max.Height	Out-In	m	12	12	30	30	30	
Guaranteed Operating Range (Outdoor)	Cooling ⁽⁹⁾	°C		-10 ~ +46	-10 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	
	Heating	°C		-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂ over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 SEER/SCOP are measured at ESP 25Pa.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.
*6 The factory setting of ESP is shown without <>.
*7 SPL measured at ESP 5Pa.

CONTROL TECHNOLOGIES

User-friendly Deluxe Remote Controller with Excellent Operability and Visibility



PAR-41MAA


2+1 Back-up rotation*

The use of a three-refrigerant air conditioning system enables you to utilize the back-up, rotation, and cut-in functions. This allows you to implement effective risk management for added peace of mind.

*Availability of this function is depending on outdoor unit, indoor unit and remote controller.

Back-up Function

In the unlikely event that one of the units stops operation due to an abnormality, the standby unit immediately starts back-up operation. Being fully prepared for a failure guarantees that and operation is always available and gives you the confidence that your system will be reliable in any situation.

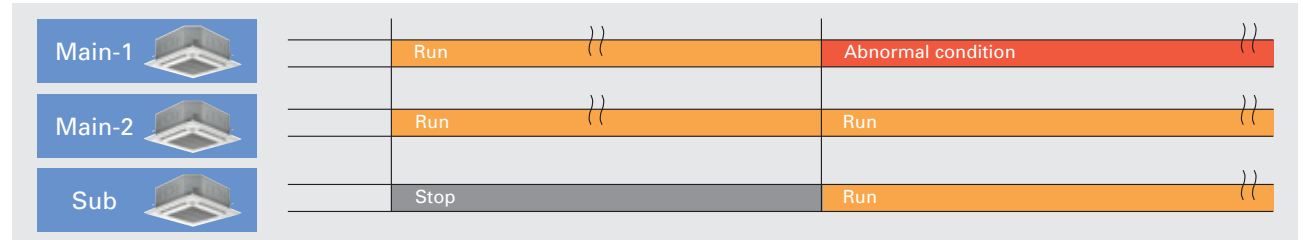


Rotation Function

A single remote controller is used to operate three-refrigerant air conditioning system in a rotation pattern. Reducing the burden on the equipment allows you to maintain a longer time between maintenance and increases product life.



Cut-in Function

If the actual room temperature greatly differs from the set temperature and two-refrigerant air conditioning system is insufficient, the standby unit starts operation to provide support.

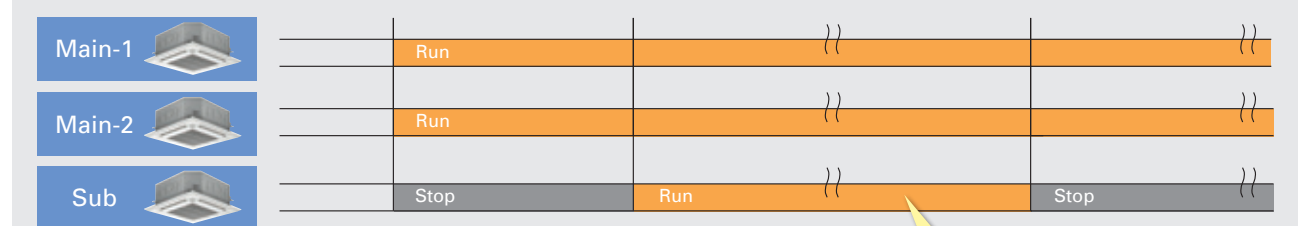

The standby unit starts operation if the actual temperature deviates significantly from the set temperature.